



WERLATONE


SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



70 dB Dual Directional Coupler

Model C2306

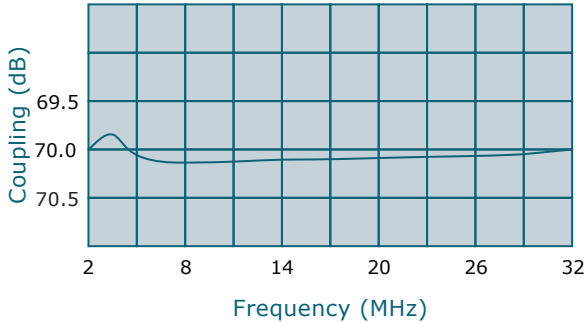

Frequency: 2 - 32 MHz

Power: 10,000 W CW



Coupling: 70 dB ± 1.0 dB Nom.

Insertion Loss: 0.05 dB Max.

VSWR: 1.05:1 Max.



Flatness: +/-0.5 dB Max.

Directivity: 30 dB Min.

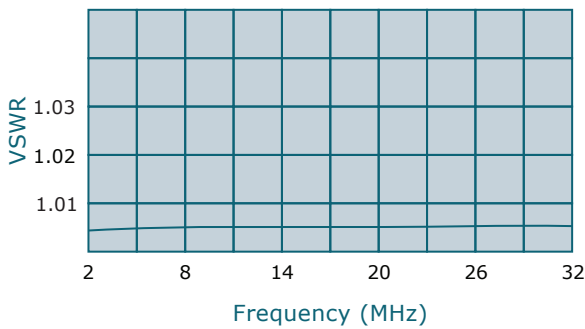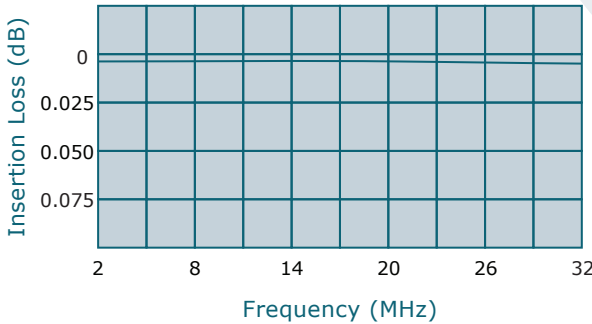

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C2306-81	1 5/8" EIA	N Female
C2306-83	1 5/8" EIA	SMA
C2306-84	1 5/8" EIA	BNC

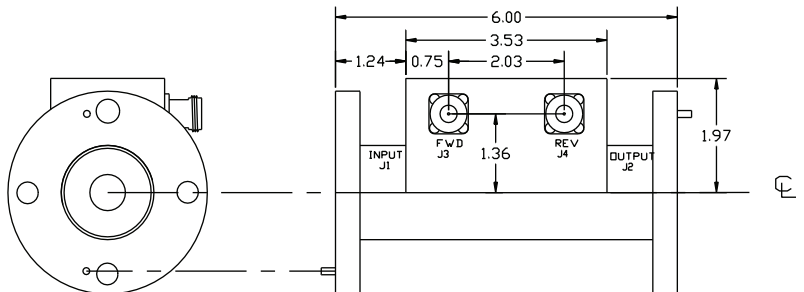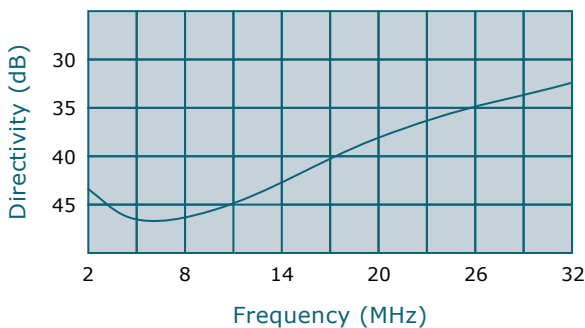

**Subject to change without notice