



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

10 dB Bi-Directional Coupler

Model C7151

Frequency: 300-3000 MHz

Power: 100 W CW





Coupling: 10 dB \pm 1.0 dB Nom.

Insertion Loss: 0.35 dB Max.*

VSWR: 1.20:1 Max.


Flatness: +/- 1.0 dB Max.

Directivity: 15 dB Min.

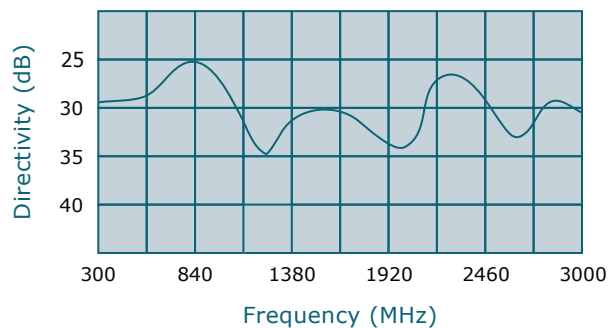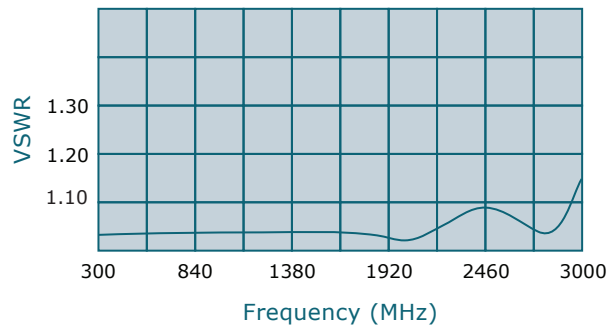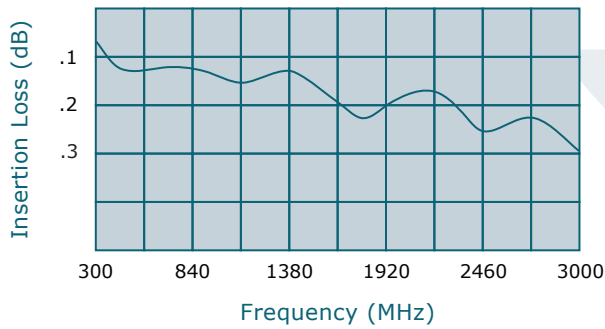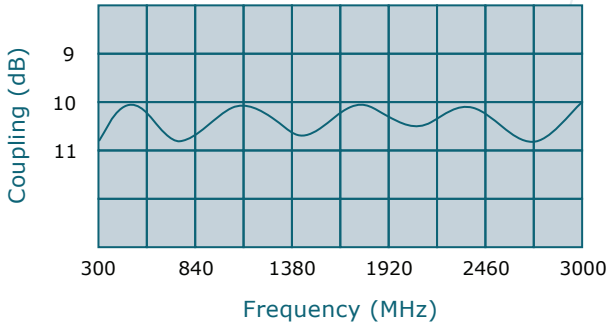

- * Does not include Theoretical Coupling Loss.
- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7151-10	N Female	N Female
C7151-12	N Female	SMA
C7151-102	SMA	SMA

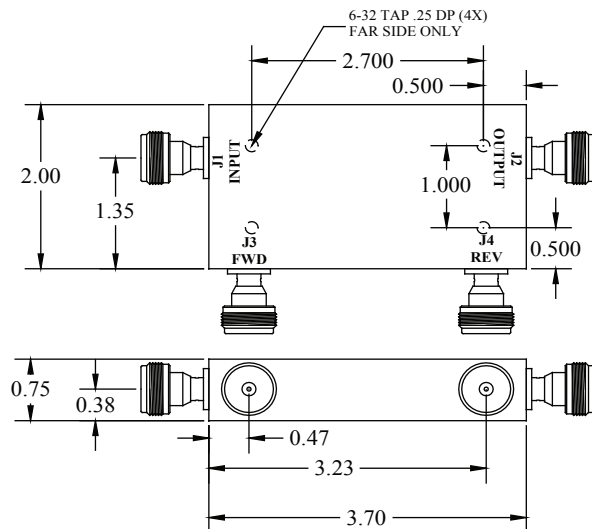

**Subject to change without notice