




WERLATONE





SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



## 2-Way Combiner/Divider

### Model D7171

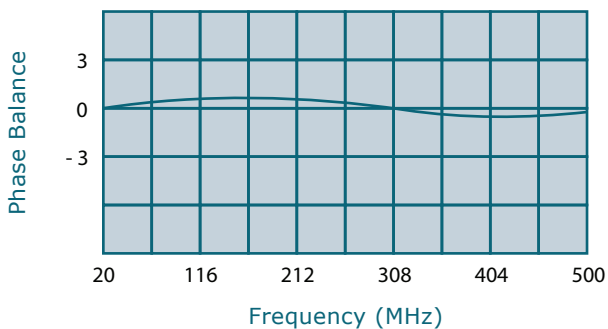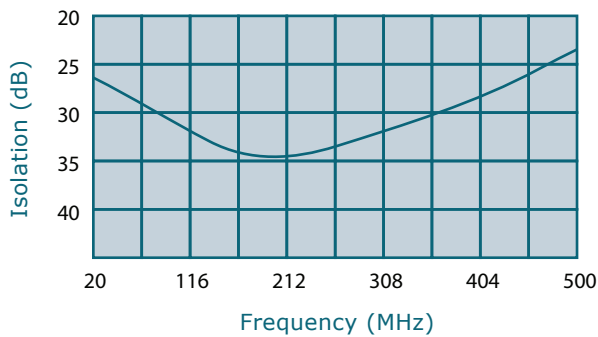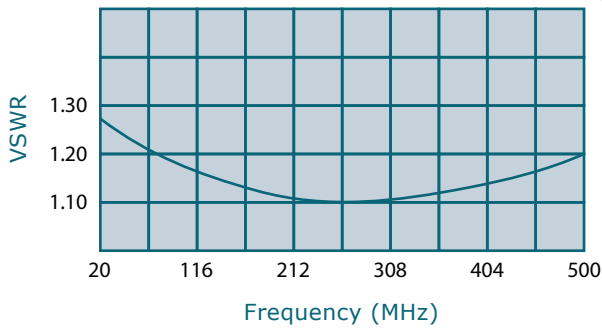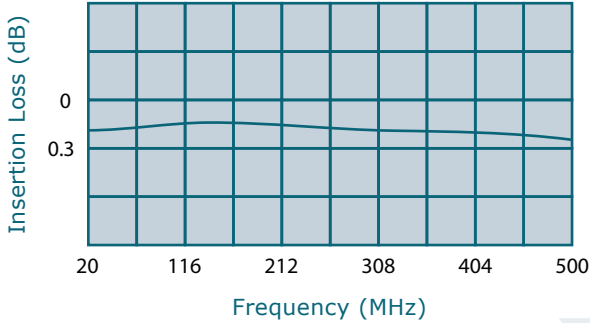

Frequency: 20 - 500 MHz

Power: 100 W CW

Insertion Loss: 0.3 dB Max.

VSWR: 1.30:1 Max.


Isolation: 20 dB Min.

Phase Balance: 3 Deg. Max.

Amplitude Balance: 0.2 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

| Connector Configuration |               |                      |
|-------------------------|---------------|----------------------|
| Model                   | J1 (Sum Port) | J2-J3 (Input/Output) |
| D7171-102               | SMA           | SMA                  |

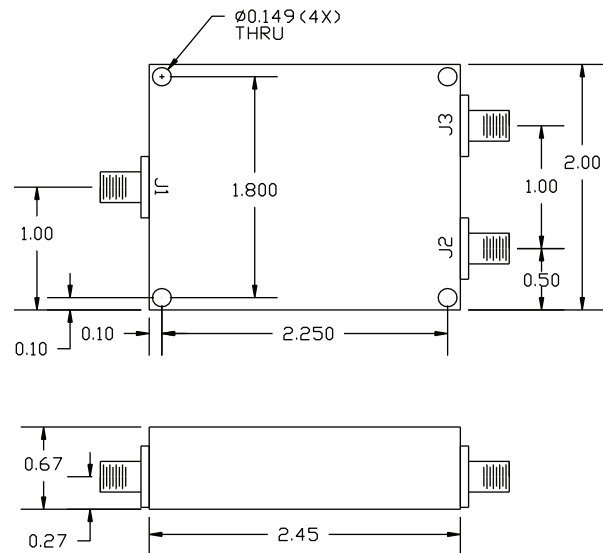

\*\*Subject to change without notice

\*\* For N or BNC Connectors, See Model D7562 \*\*

high power RF devices