WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

40 dB Dual Directional Coupler

Model 7711

Frequency: 100 - 3000 MHz

Power: 100 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.35 dB Max.

VSWR: 1.25:1 Max.

Flatness: +/-1.0 dB Max.

Directivity: 18 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

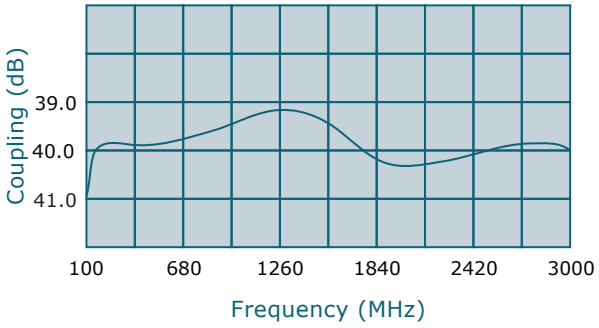

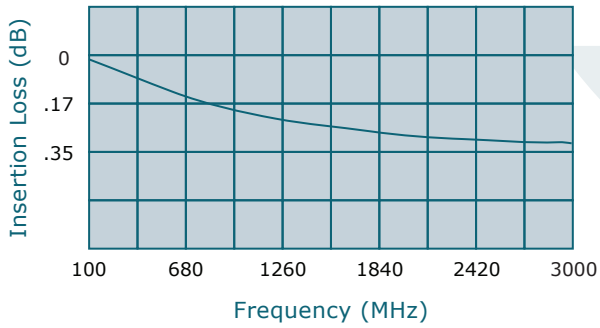

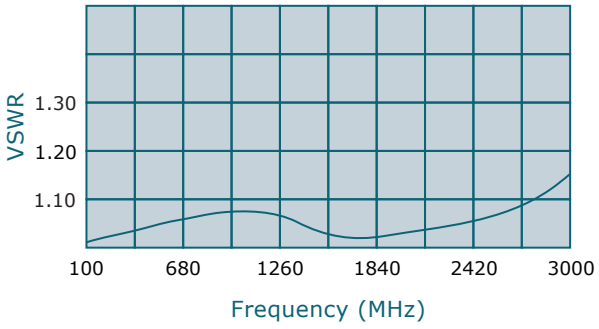

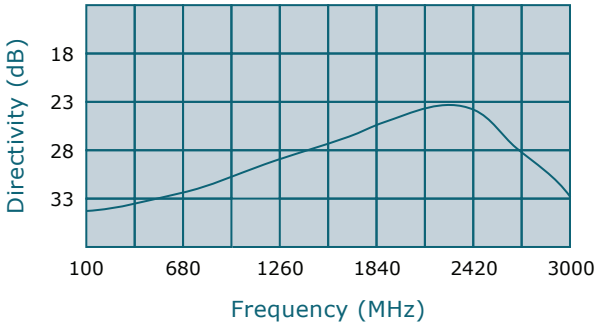

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7711-10	N Female	N Female
C7711-12	N Female	SMA
C7711-102	SMA	SMA

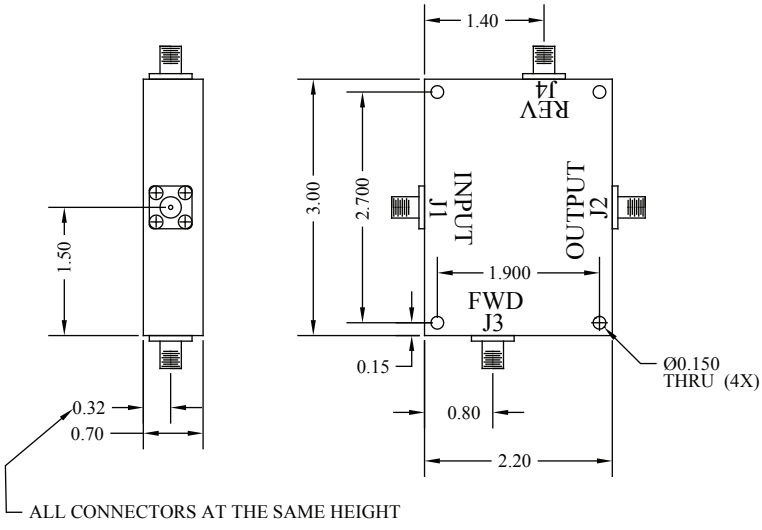

high power RF devices

**Subject to change without notice