







WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

# 40 dB Dual Directional Coupler

## Model C7811

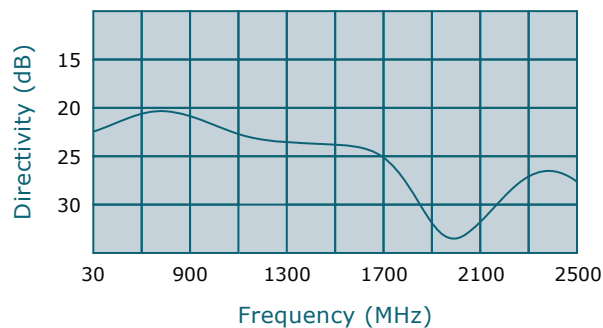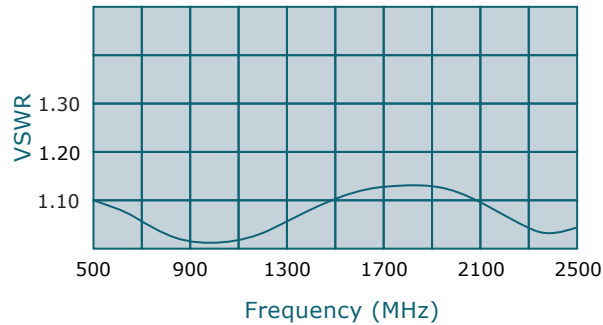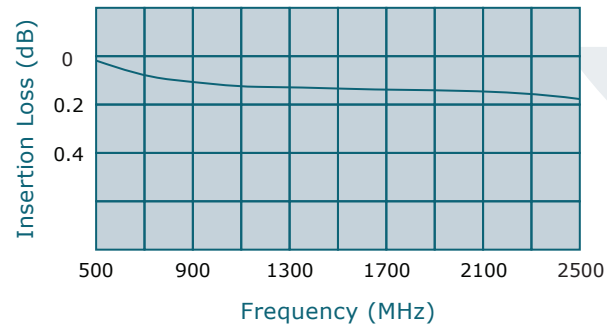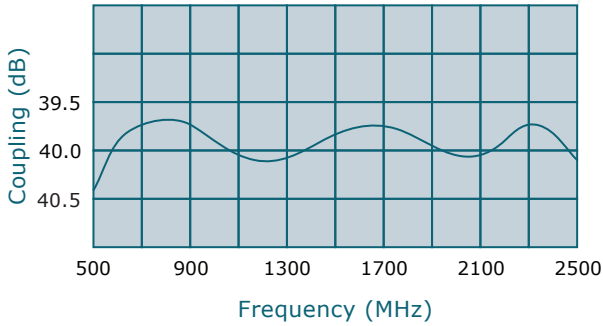

Frequency: 500 - 2500 MHz

Power: 100 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.


VSWR: 1.25:1 Max.

Flatness: +/- 0.5 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

Connector Configurations			
Model	J1,J2 (Mainline)	J3 (Fwd)	J4 (Rev)
C7811-102	SMA	SMA	SMA

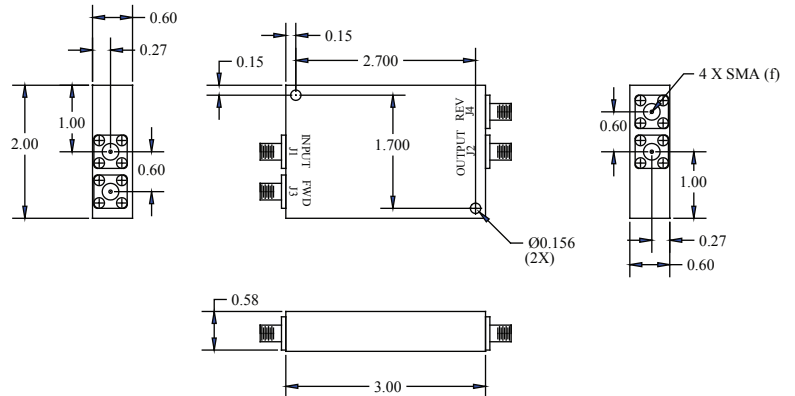

high power RF devices

\*\*Subject to change without notice