



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



30 dB Dual Directional Coupler

Model C7881

Frequency: 20-500 MHz

Power: 25 W CW





Coupling: 30 dB \pm 1.0 dB Nom.

Insertion Loss: 0.70 dB Max.

VSWR: 1.20:1 Max.


Flatness: \pm 1.0 dB Max.

Directivity: 20 dB Min.

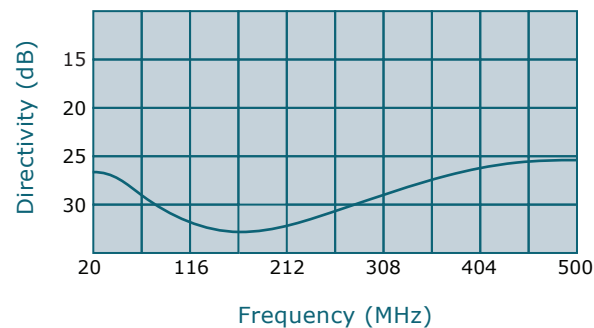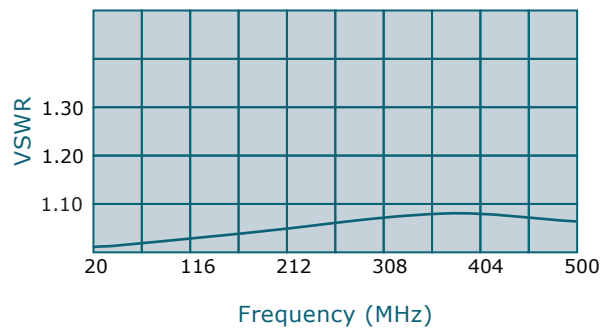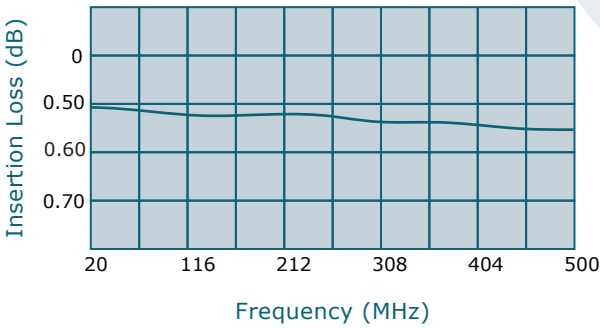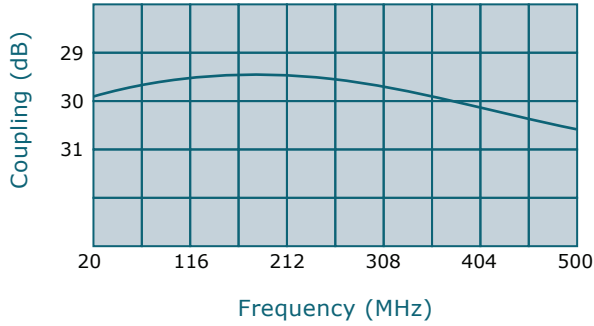

- All specifications guaranteed.
- Test data provided with each unit shipped.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7881-10	N Female	N Female
C7881-12	N Female	SMA
C7881-102	SMA	SMA

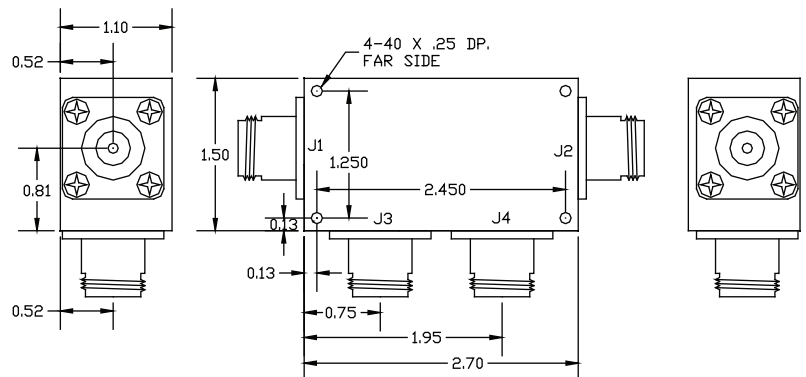

**Subject to change without notice