



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 2-Way 180° Combiner/Divider

### Model H7683

Frequency: 100 - 500 MHz

Power: 100 W CW





Insertion Loss: 0.8 dB Max.

VSWR: 1.40:1 Max.


Isolation: 25 dB Min.

Phase Balance: 180° ± 5° Max.

Amplitude Balance: 0.4 dB Max.

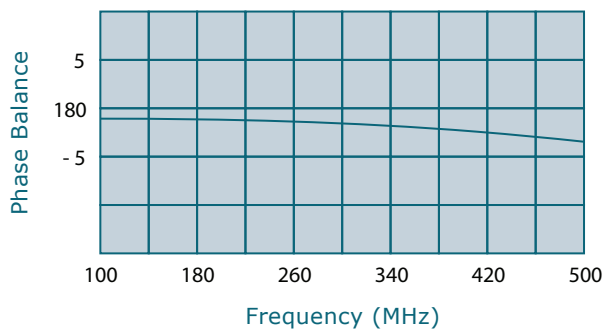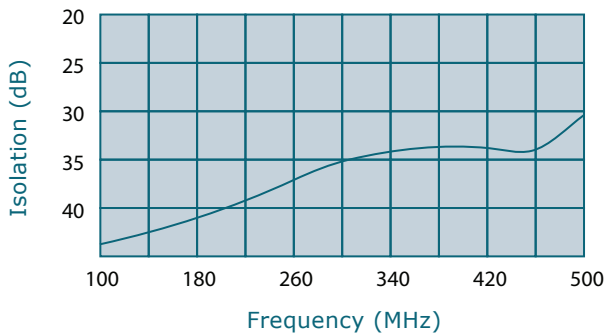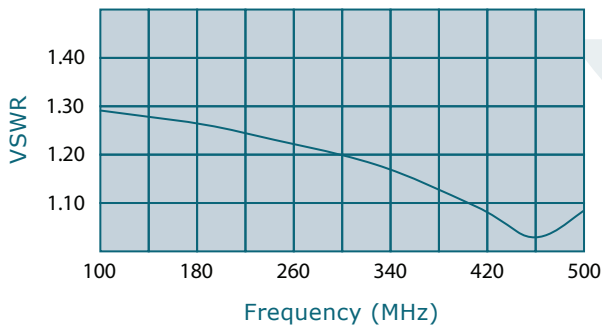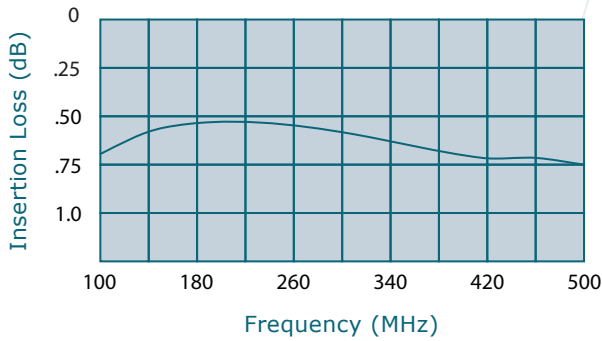

Connector Configurations		
Model	J1 (Sumport)	J2,J3 (Inputs/Outputs)
H7683-102	SMA	SMA

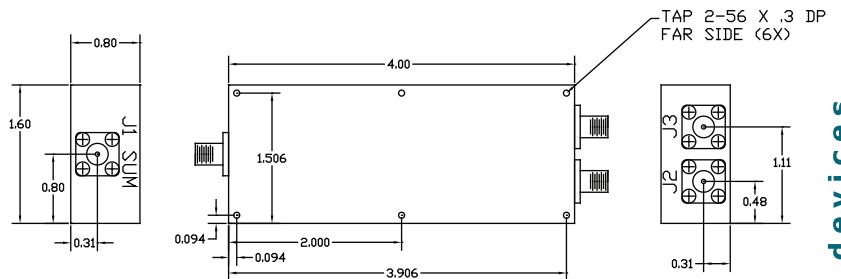

high power RF devices

\*\*Subject to change without notice