



WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

## 3-Way Combiner/Divider

### Model D6717

Frequency: 20-130 MHz

Power: 100 W CW





Insertion Loss: 0.35 dB Max.

VSWR: 1.30:1 Max.

Isolation: 18 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

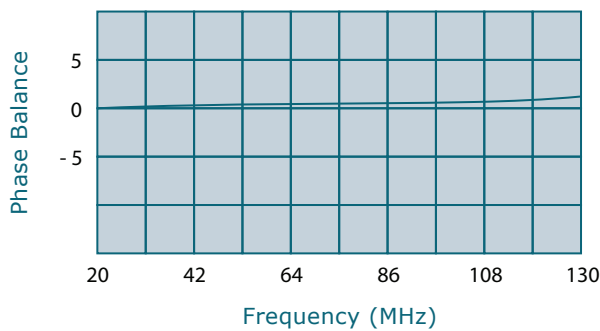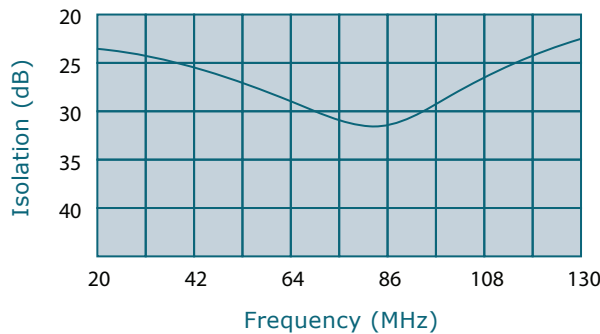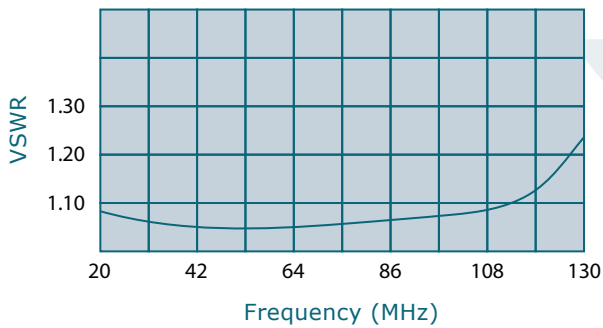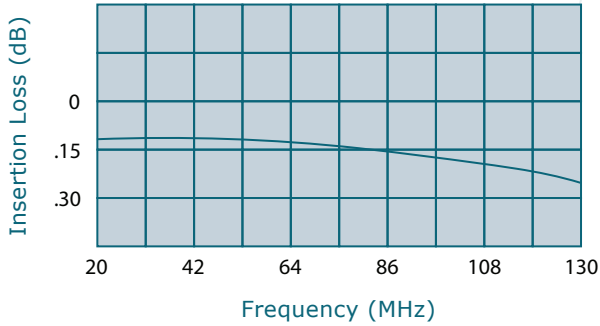

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sum Port)	J2-J4 (Inputs/Outputs)
D6717-12	N Female	SMA
D6717-102	SMA	SMA

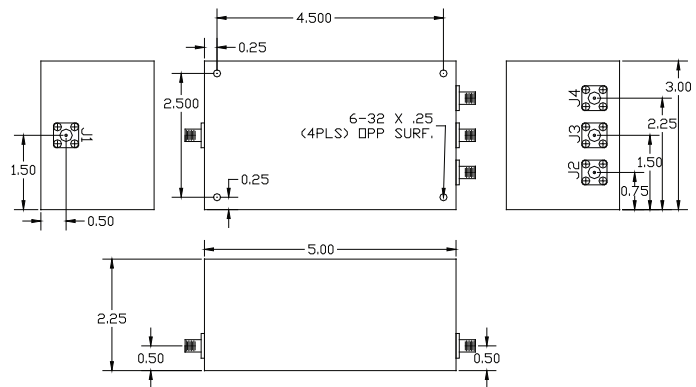

\*\*Subject to change without notice