WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

20 dB Bi-Directional Coupler

Model C7149

Frequency: 60-600 MHz

Power: 200 W CW

Coupling: 20 dB ± 1.0 dB Nom.

Insertion Loss: 0.3 dB Max.

VSWR: 1.20:1 Max.

Flatness: +/- 1.0 dB Max.

Directivity: 20 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.

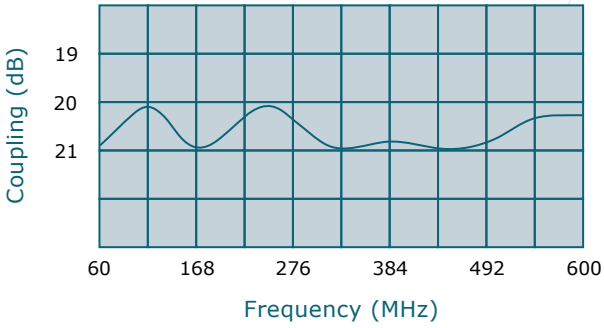

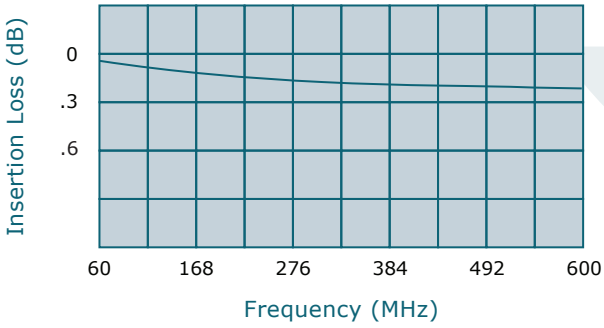

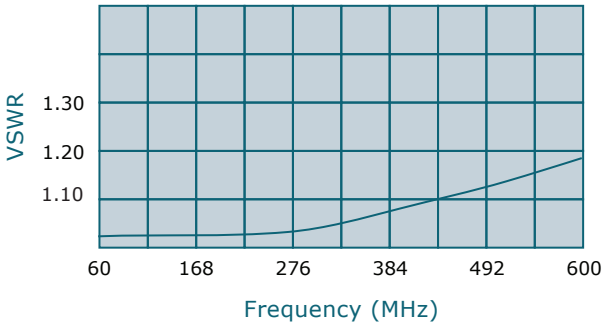

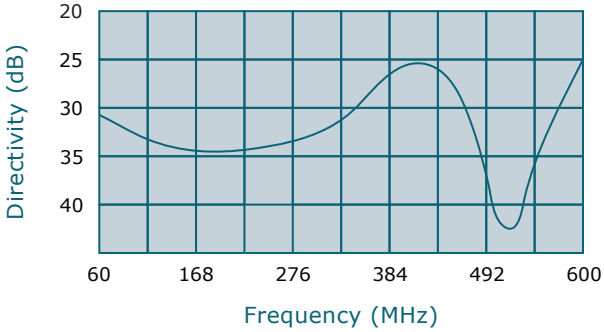

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C7149-10	N Female	N Female
C7149-12	N Female	SMA
C7149-102	SMA	SMA

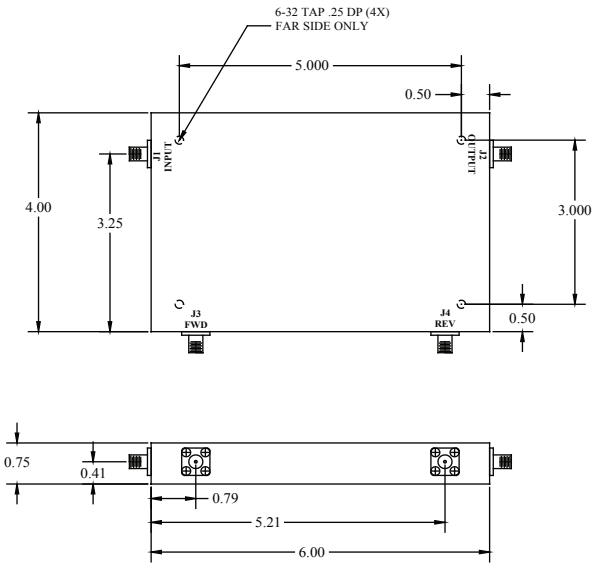

high power RF devices

**Subject to change without notice