



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way Combiner/Divider

Model D7823

Frequency: 500-2500 MHz

Power: 200 W CW





Insertion Loss: 0.4 dB Max.

VSWR: 1.35:1 Max.

Isolation: 15 dB Min.

Phase Balance: 5 Deg. Max.


Amplitude Balance: 0.2 dB Max.

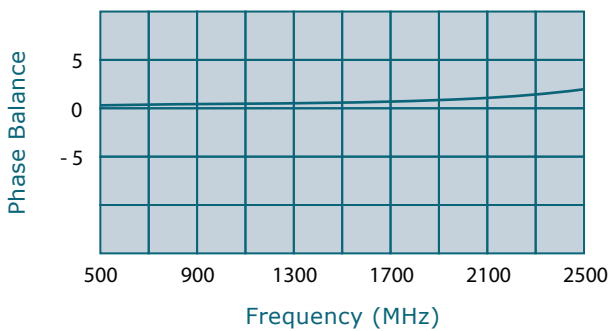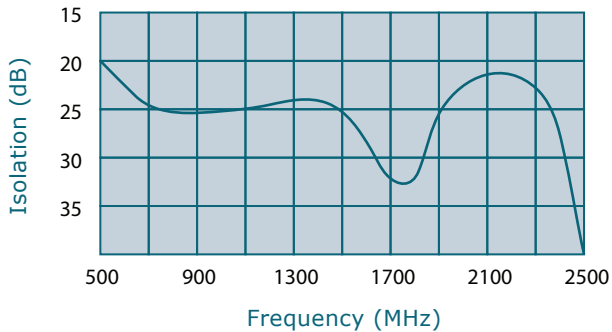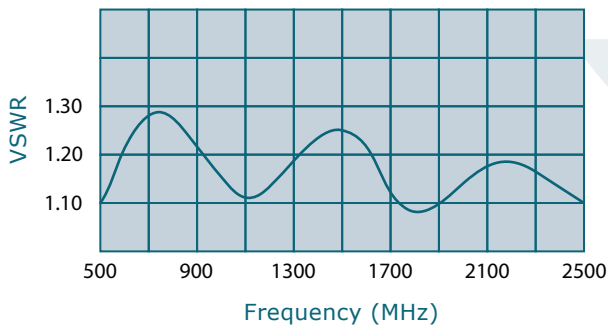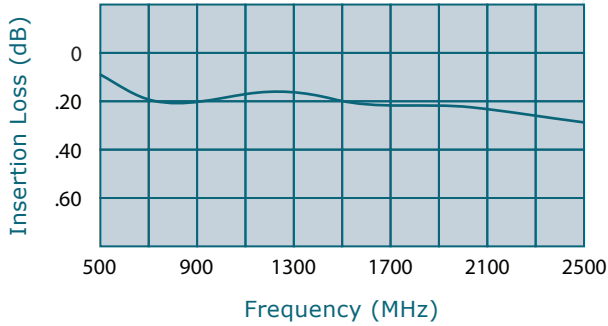

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connectors

Model	J1	J2,J3
D7823-10	N Female	N Female
D7823-12	N Female	SMA
D7823-102	SMA	SMA

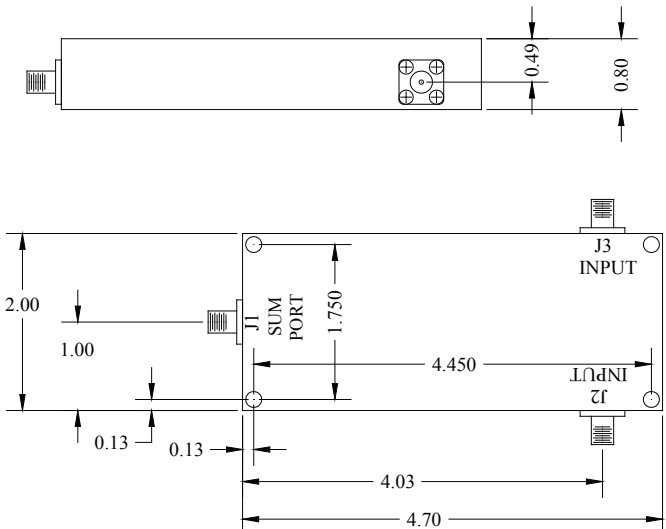

high power RF devices