







WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way Combiner/Divider

Model D7885

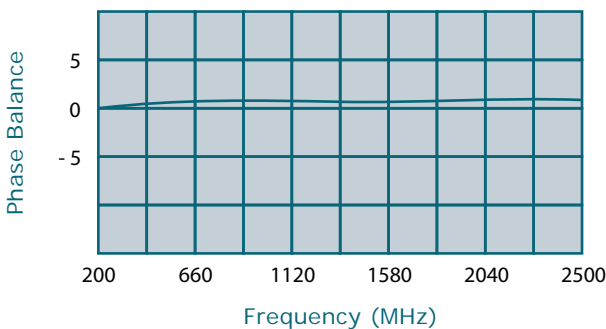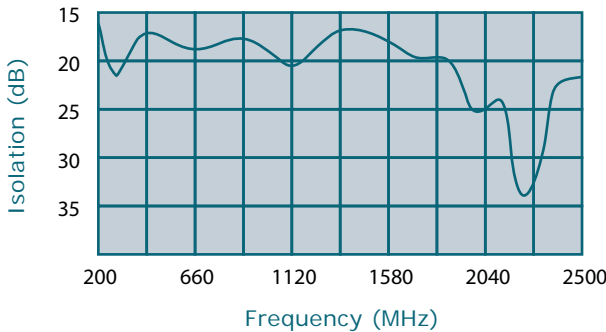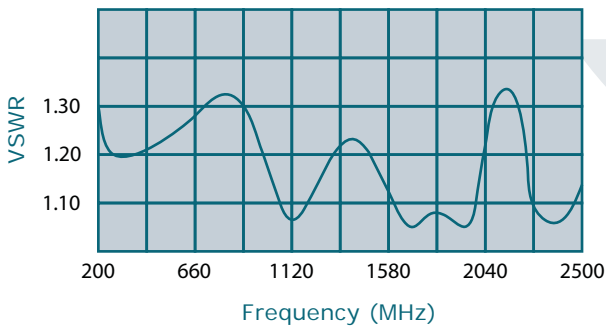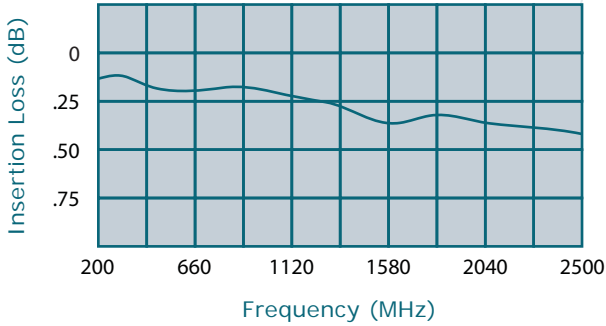

Frequency: 200-2500 MHz

Power: 200 W CW

Insertion Loss: 0.65 dB Max.

VSWR: 1.40:1 Max.

Isolation: 15 dB Min.



Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.2 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connectors

Model	J1	J2, J3
D7885-10	N Female	N Female
D7885-12	N Female	SMA
D7885-102	SMA	SMA

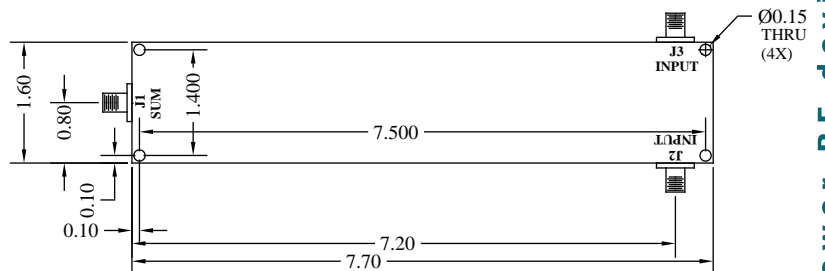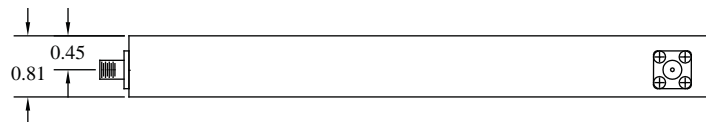

**Subject to change without notice

high power RF devices