WERLATONE | SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way 180° Combiner/Divider

Model H7498

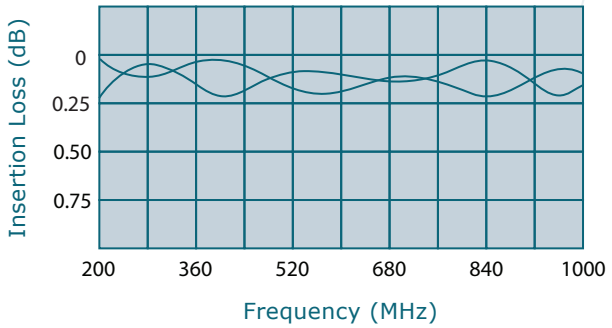

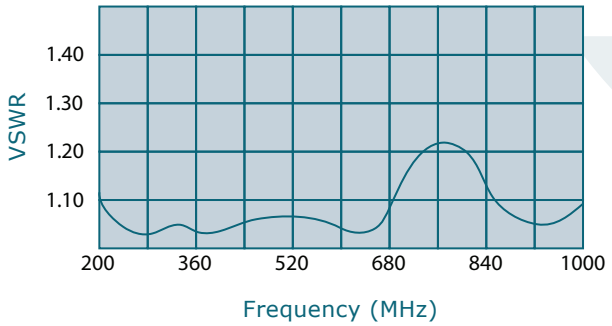

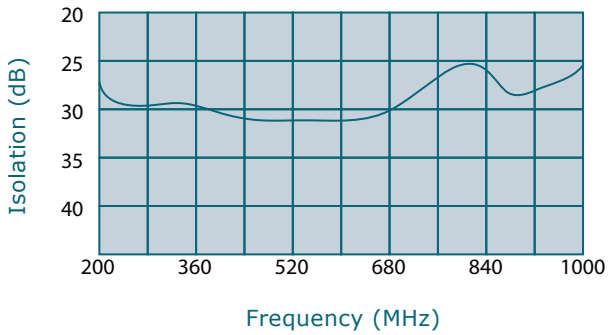

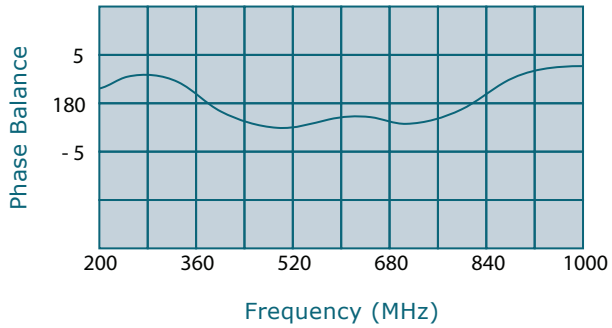

Frequency:	200 - 1000 MHz
Power:	750 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	180° ± 5° Max.
Amplitude Balance:	± 0.35 dB Max.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1 (Sumport)	J2-J4 (Inputs/Outputs)
H7498-10	N Female	N Female
H7498-20	7/16 Female	N Female
H7498-28	7/16 Female	7/16 Female



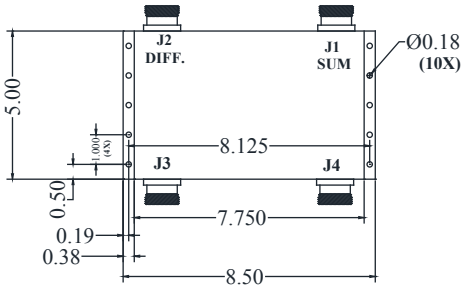



high power RF devices

**Subject to change without notice