



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com



30 dB Bi-Directional Coupler

Model C8000

Frequency: 600-6000 MHz

Power: 100 W CW





Coupling: 30 dB ± 1.0 dB Nom.

Insertion Loss: 0.4 dB Max.

VSWR: 1.25:1 Max.

Flatness: +/- 1.0 dB Max.


Directivity: 15 dB Max.

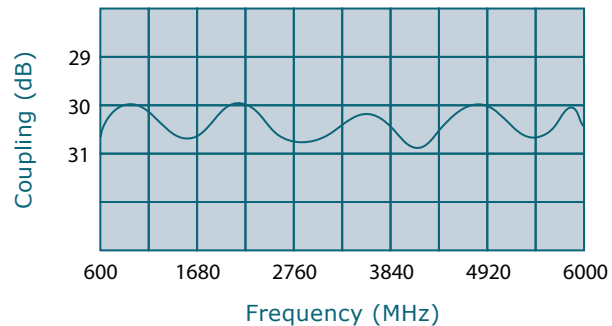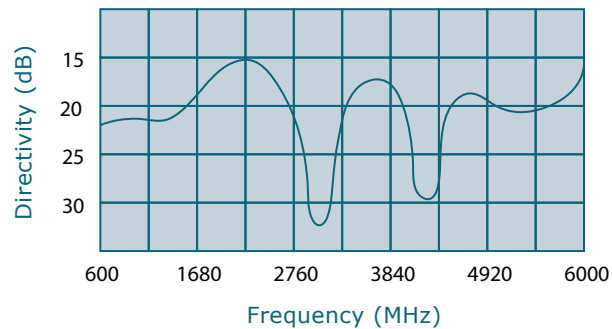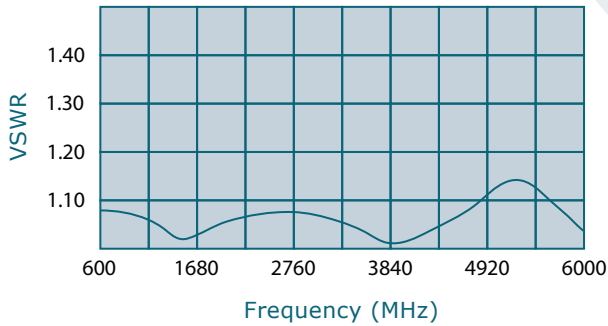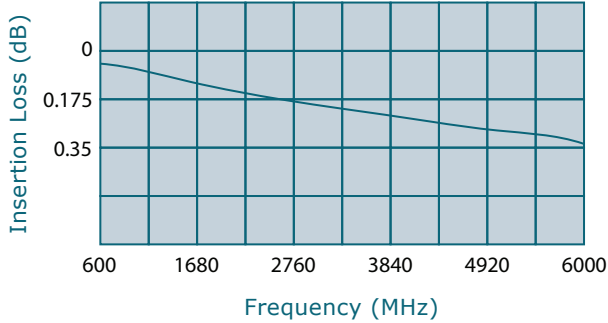

**Subject to change without notice

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Alternate connector configurations upon request.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C8000-102	SMA	SMA

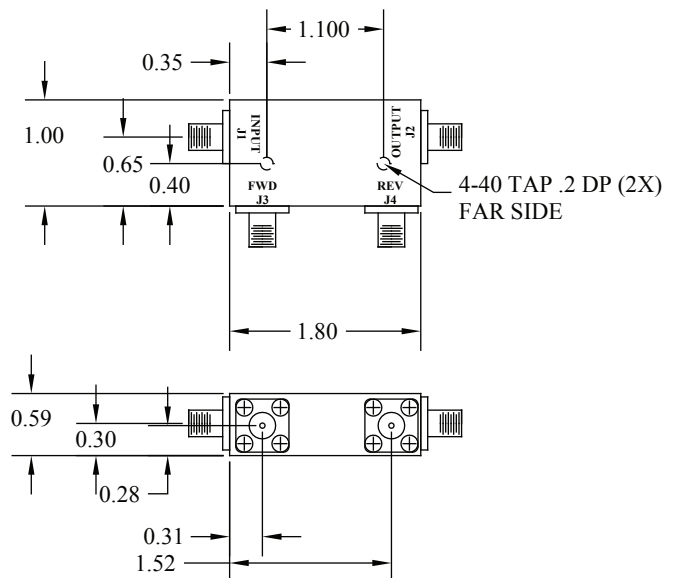

high power RF devices