



WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

2-Way Combiner/Divider

Model D8468

Frequency: 800 - 5000 MHz

Power: 150 W CW





Insertion Loss: 0.6 dB Max.

VSWR: 1.35:1 Max.

Isolation: 15 dB Min.


Phase Balance: 5 Deg. Max.

Amplitude Balance: 0.3 dB Max.

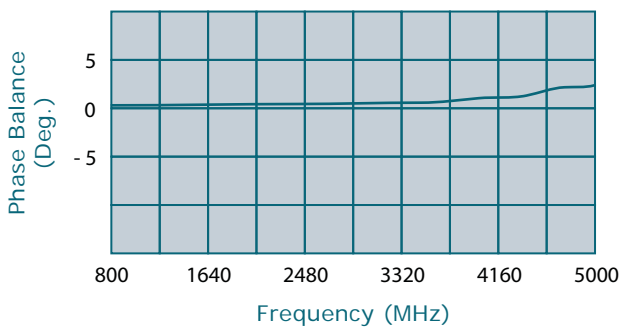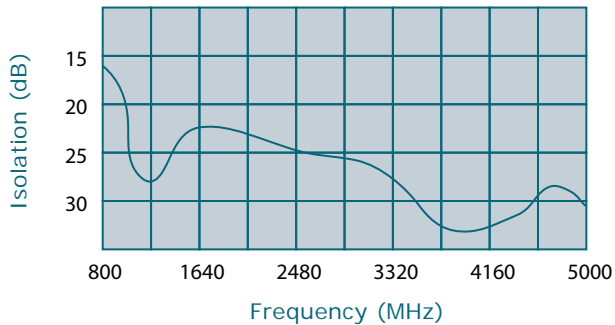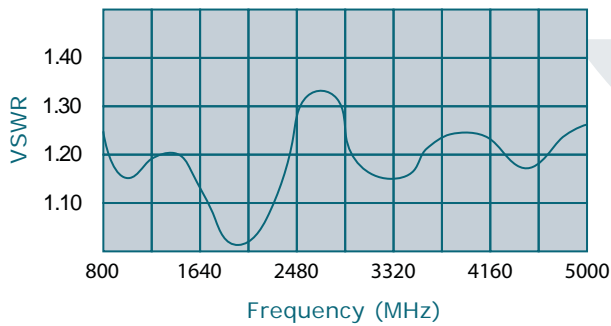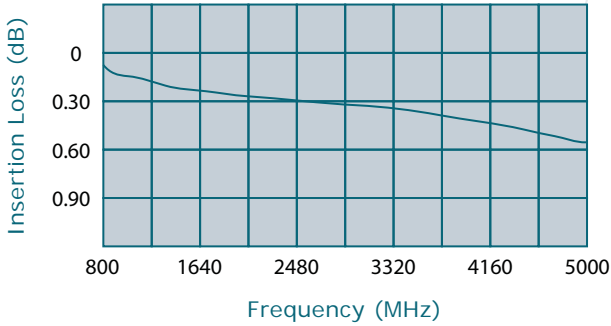

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Rated at 30 W unbalanced power.

Connector Configuration		
Model	J1 (Sum Port)	J2,J3 (Inputs/Outputs)
D8468-102	SMA	SMA

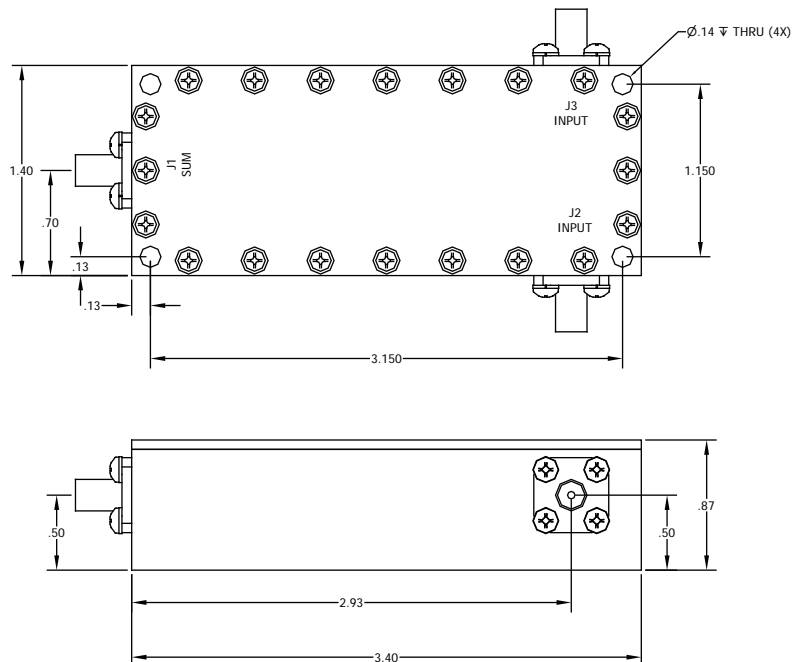

high power RF devices

**Subject to change without notice