




WERLATONE

SINCE 1965

Werlatone, Inc.
 17 Jon Barrett Road
 Patterson, New York 12563
 T 845.278.2220
 F 845.278.3440
 www.werlatone.com

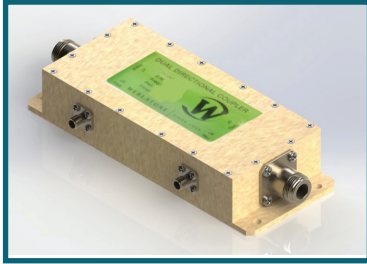

40 dB Dual Directional Coupler

Model C2671

Frequency: 0.5 - 32 MHz

Power: 3000 W CW

Coupling: 40 dB \pm 1.0 dB Nom.





Insertion Loss: 0.1 dB Max.

VSWR: 1.05:1 Max.


Flatness: \pm 0.25 dB Max.

Directivity: 25 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at 500 W CW into an infinite VSWR.

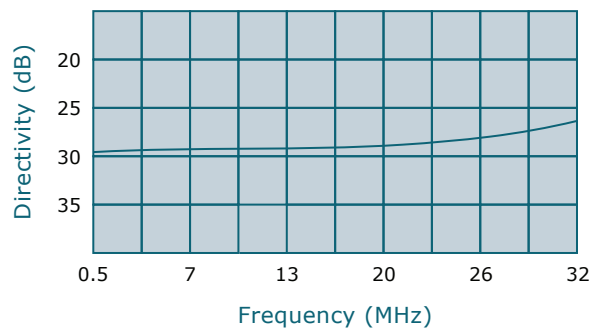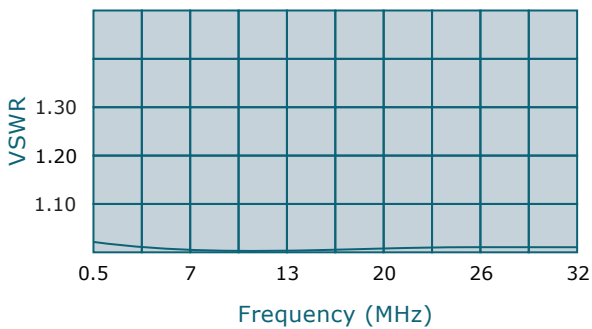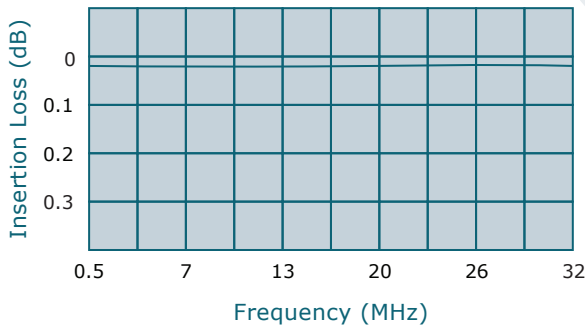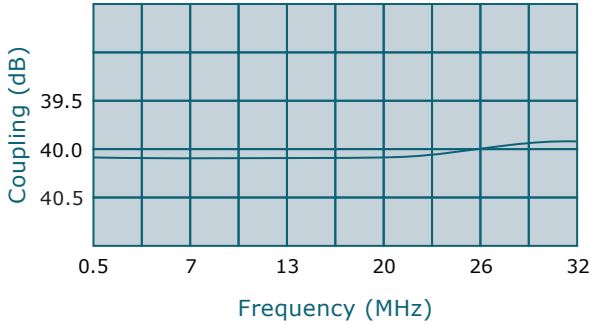

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C2671-10	N Female	N Female
C2671-12	N Female	SMA
C2671-13	N Female	BNC
C2671-43	SC Female	SMA

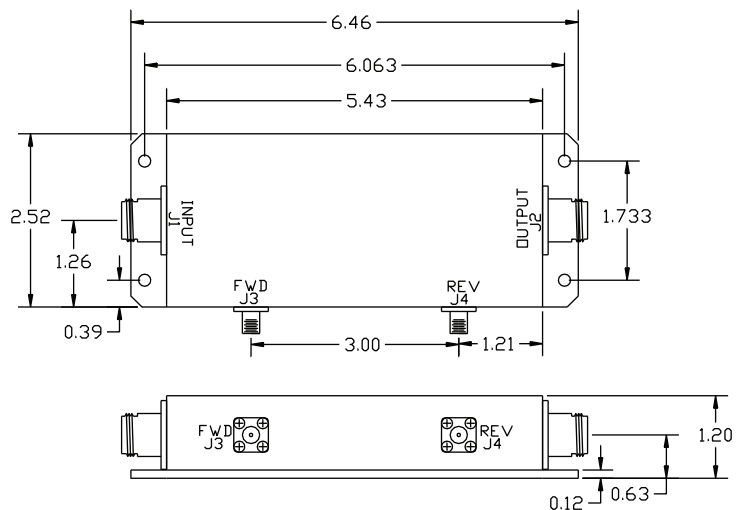

**Subject to change without notice