




WERLATONE

SINCE 1965

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com



## 40 dB Dual Directional Coupler

### Model C3744

Frequency: 0.5 - 32 MHz

Power: 5,000 W CW





Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.05 dB Max.

VSWR: 1.15:1 Max.

Flatness: +/-0.5 dB Max.

Directivity: 20 dB Min.

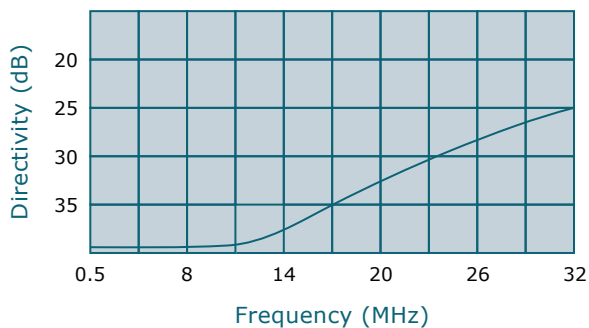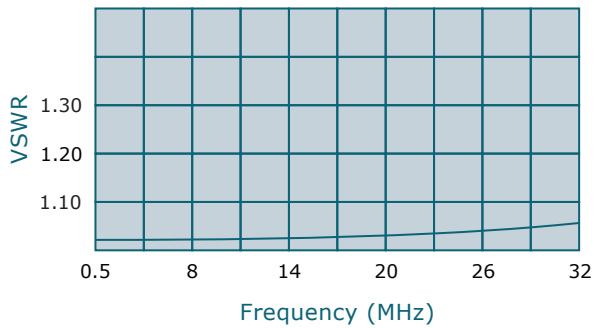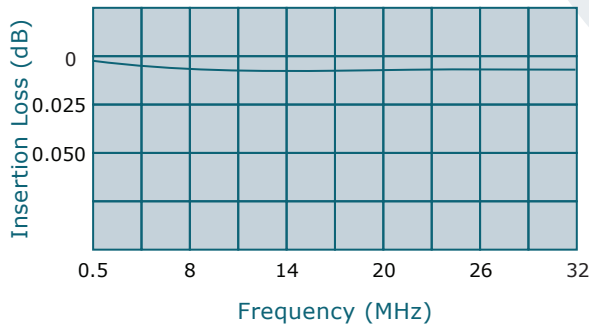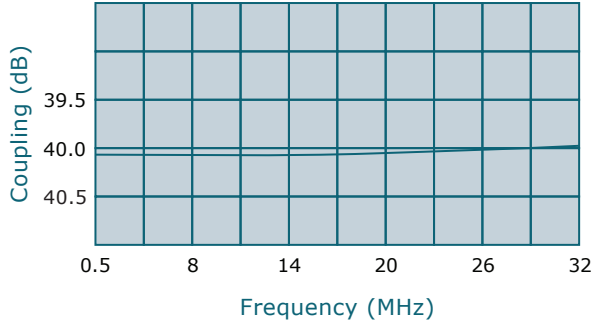

\*\*Subject to change without notice

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C3744-10	N Female	N Female
C3744-12	N Female	SMA
C3744-13	N Female	BNC
C3744-20	7/16 Female	N Female

