




WERLATONE

SINCE 1965

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

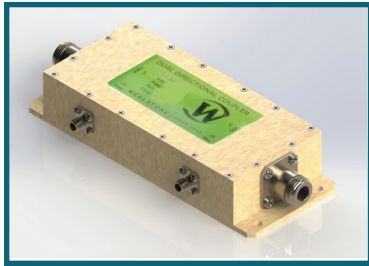

40 dB Dual Directional Coupler

Model C6070

Frequency: 1.50 - 30 MHz

Power: 2,500 W CW





Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.1 dB Max.

VSWR: 1.05:1 Max.


Flatness: +/- 0.25 dB Max.

Directivity: 25 dB Min.

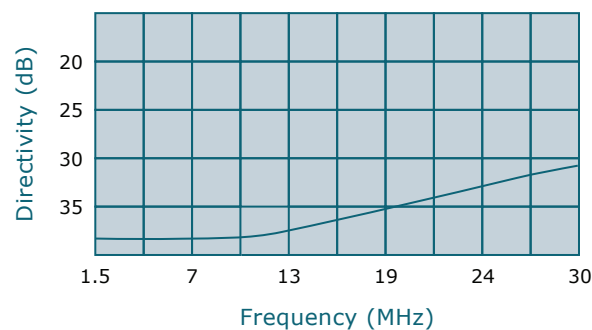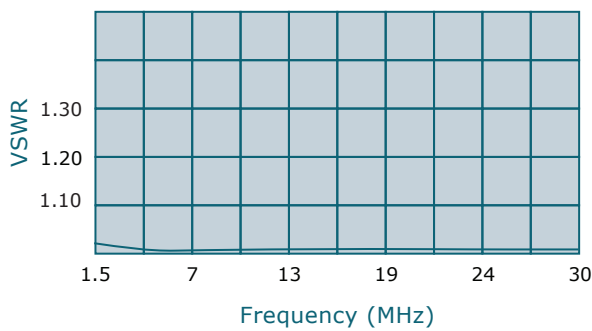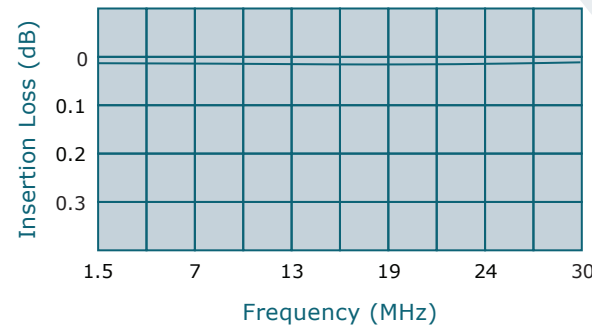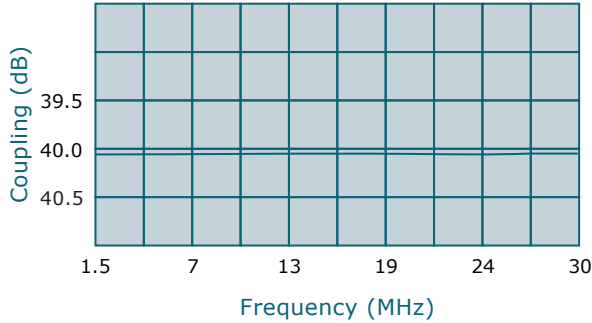

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.
- * Designed to operate, at 500 W CW into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6070-10	N Female	N Female
C6070-12	N Female	SMA
C6070-13	N Female	BNC
C6070-43	SC Female	SMA

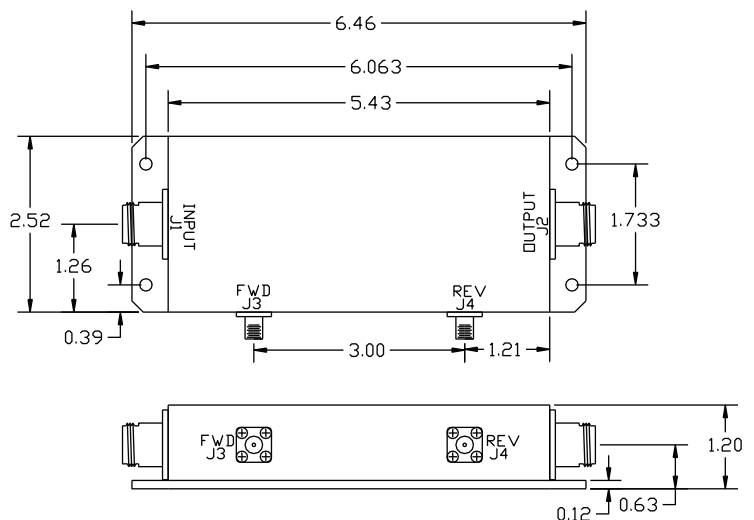

**Subject to change without notice

high power RF devices