

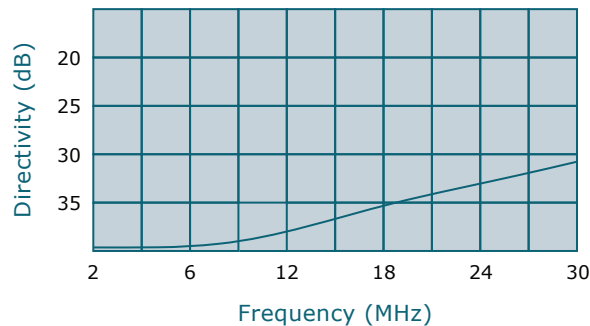
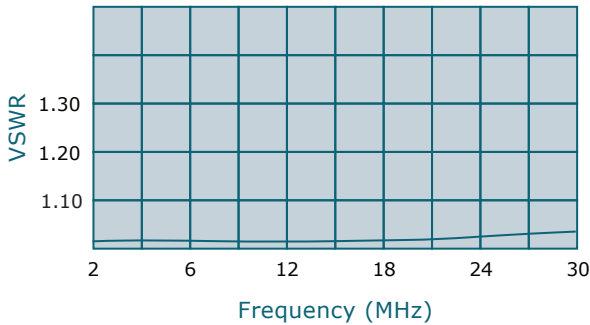


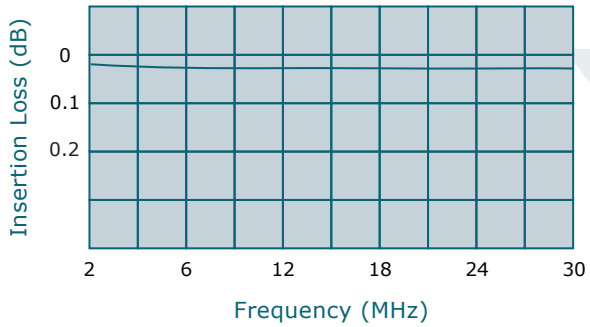

Werlatone, Inc.
17 Jon Barrett Road
Patterson, New York 12563
T 845.278.2220
F 845.278.3440
www.werlatone.com

40 dB Dual Directional Coupler

Model C3345

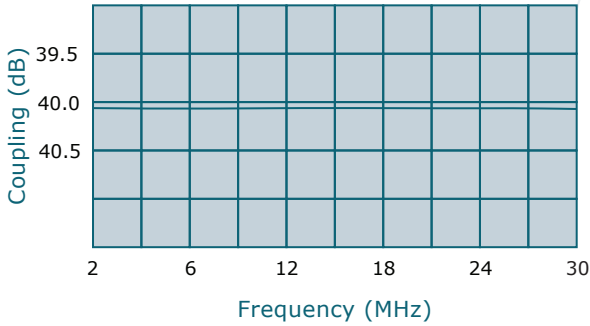

Frequency: 2-30 MHz

Power: 1000 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.2 dB Max.



VSWR: 1.10:1 Max.

Flatness: +/- 0.2 dB Max.

Directivity: 25 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C3345-10	N Female	N Female
C3345-12	N Female	SMA
C3345-13	N Female	BNC

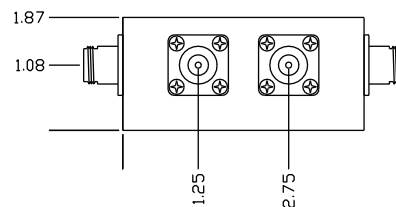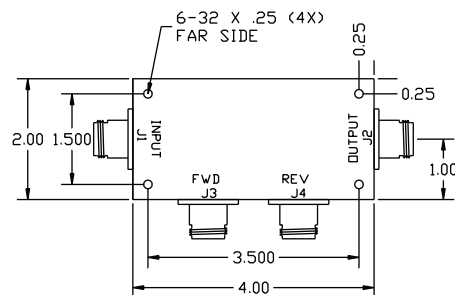

**Subject to change without notice