

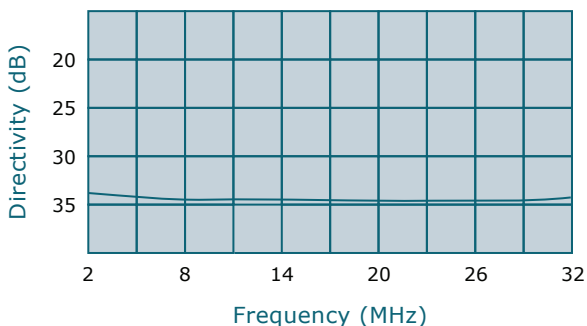
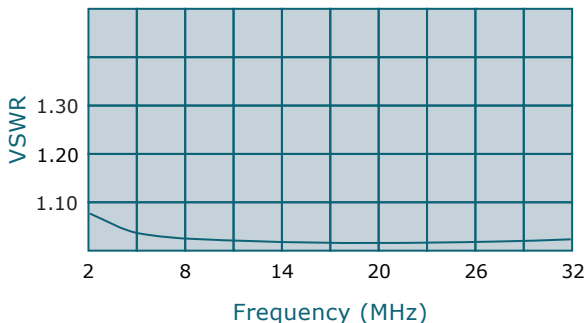


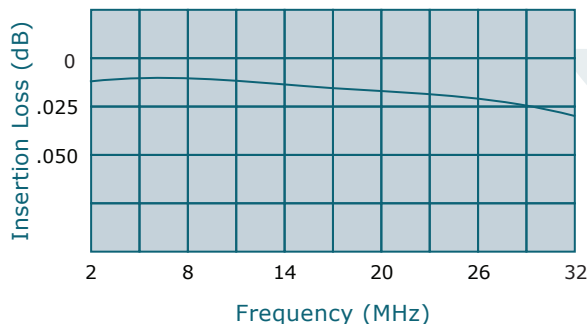

Werlatone, Inc.  
17 Jon Barrett Road  
Patterson, New York 12563  
T 845.278.2220  
F 845.278.3440  
www.werlatone.com

# 40 dB Dual Directional Coupler

## Model C1505

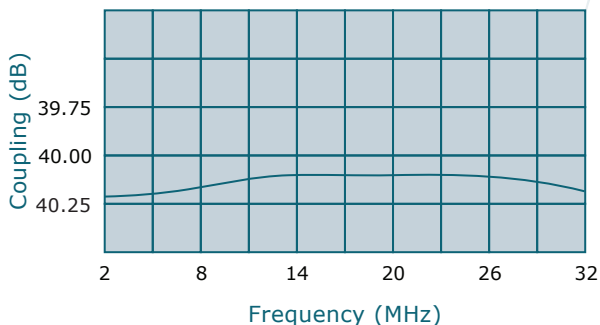

Frequency: 2 - 32 MHz

Power: 2500 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.05 dB Max.


VSWR: 1.15:1 Max.

Flatness: +/-0.25 dB Max.

Directivity: 30 dB Min.

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C1505-10	N Female	N Female
C1505-12	N Female	SMA
C1505-13	N Female	BNC
C1505-20	7/16 Female	N Female

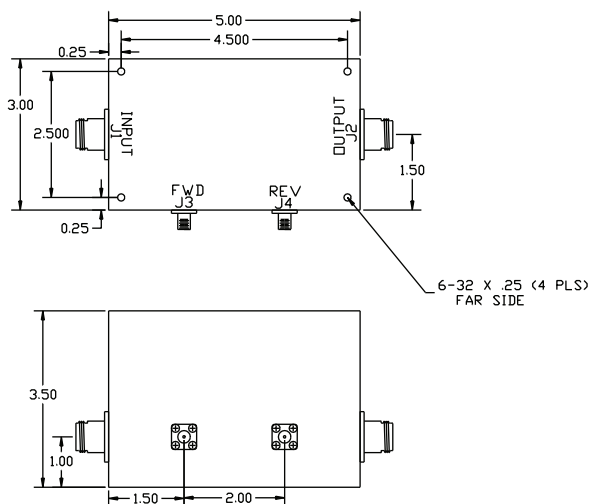

\*\*Subject to change without notice