

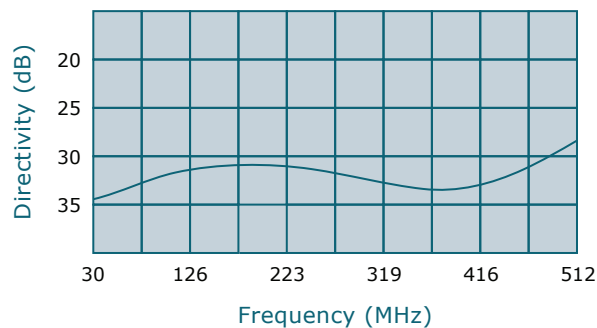
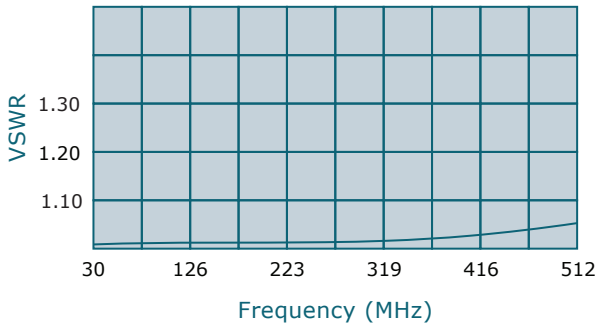


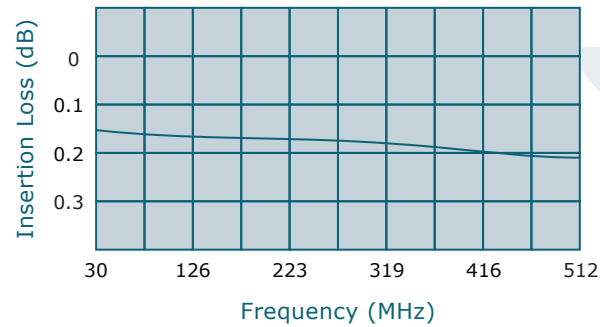

Werlatone, Inc.
 17 Jon Barrett Road
 Patterson, New York 12563
 T 845.278.2220
 F 845.278.3440
 www.werlatone.com

40 dB Dual Directional Coupler

Model C6101

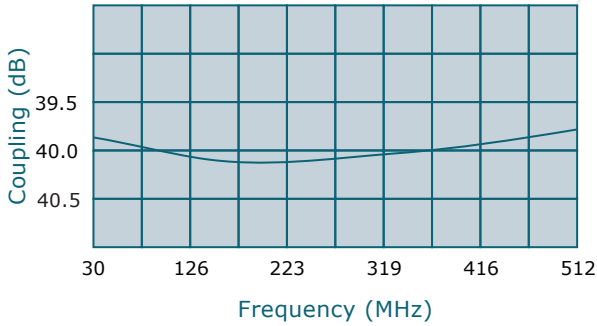

Frequency: 30 - 512 MHz

Power: 100 W CW

Coupling: 40 dB ± 1.0 dB Nom.

Insertion Loss: 0.25 dB Max.

VSWR: 1.25:1 Max.

Flatness: +/- 0.6 dB Max.



Directivity: 20 dB Min.

**Mismatch Tolerant®* Design

- All specifications guaranteed.
- Test data provided with each unit shipped.
- Uni-Directional version available.

* Designed to operate, at rated power into an infinite VSWR.

Connector Configurations		
Model	J1,J2 (Mainline)	J3,J4 (Coupled Port)
C6101-10	N Female	N Female
C6101-12	N Female	SMA
C6101-13	N Female	BNC
C6101-102	SMA	SMA

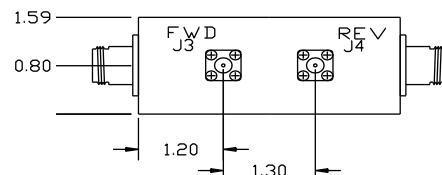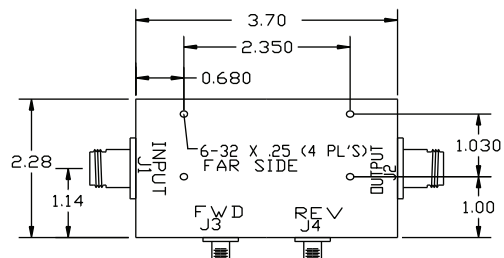

**Subject to change without notice