



DECADES AHEAD[®]
high power RF devices




Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

Absorptive VHF Low Pass Filter

Model AF9255

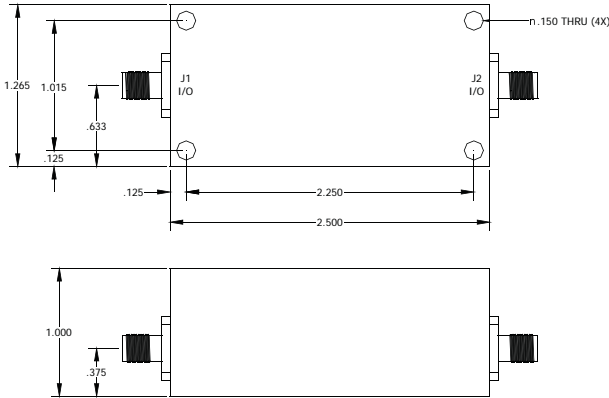

Frequency:	10 -170 MHz
Power:	
Pass Band:	50 W CW
Stop Band:	10 W CW
Insertion Loss:	
Pass Band:	0.6 dB Max.
Rejection:	
300-1500 MHz:	50 dB Min.
VSWR:	
10-170 MHz:	1.25:1 Max.
170-1500 MHz:	1.90:1 Max.


Connector Configurations

Model	J1 (Input/Output)	J2 (Input/Output)
AF9255-102	SMA	SMA

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +75°C

Insertion Loss & Band Rejection:

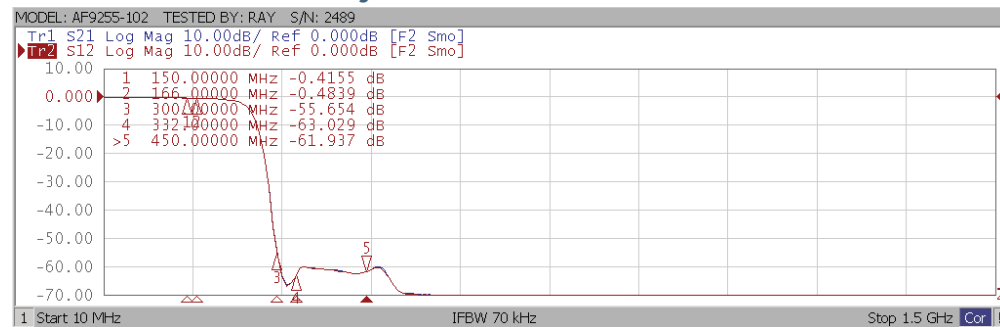

Return Loss:

