



DECADES AHEAD[®]
high power RF devices





Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com



50 dB Dual Directional Coupler
Model C7067

Frequency:	123 - 133 MHz
Power:	2,250 W CW
Coupling:	50 ± 1.0 dB Nom.
Insertion Loss:	0.15 dB Max. *
VSWR:	1.20:1 Max.
Flatness:	0.5 dB Max.
Directivity:	27 dB Min.

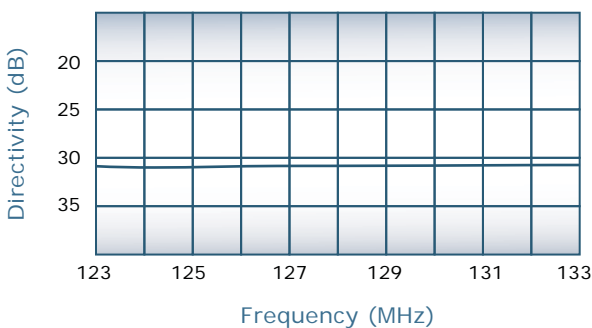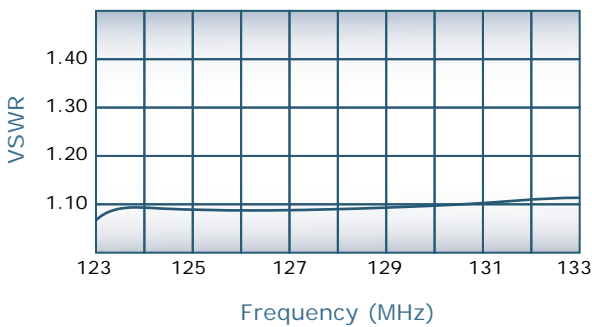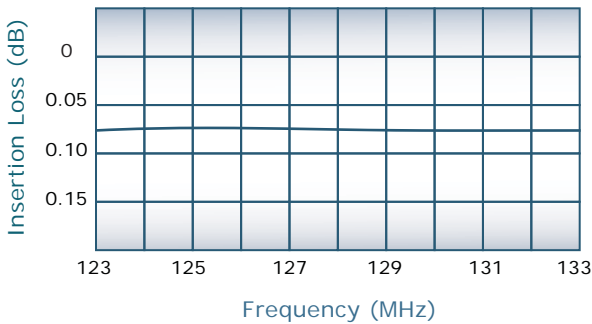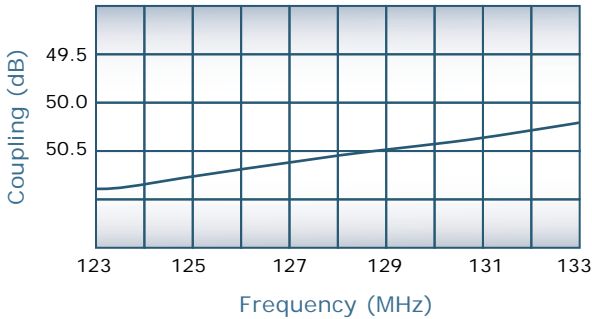

Notes

- * Does not include theoretical coupling loss
- All specifications guaranteed
- Test data provided with each unit shipped
- Weight: 1 Pound 15 Ounces
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Input)	J2 (Output)	J3-J6 (Coupled Ports)
C7067-12	N Female	N Female	SMA
C7067-22	7/16 Female	7/16 Female	SMA
C7067-28	7/16 Male	7/16 Male	SMA
C7067-728	7/16 Male	7/16 Female	SMA

