



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com






**2-Way *Non-Isolated*
 Combiner/Divider**

Model D6295

Frequency:	150 - 500 MHz
Power:	100 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.15 dB Max.



For In-Building Applications

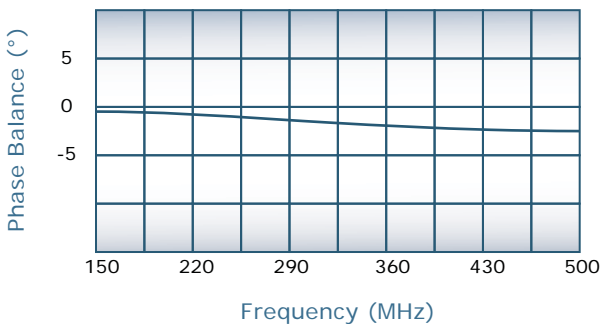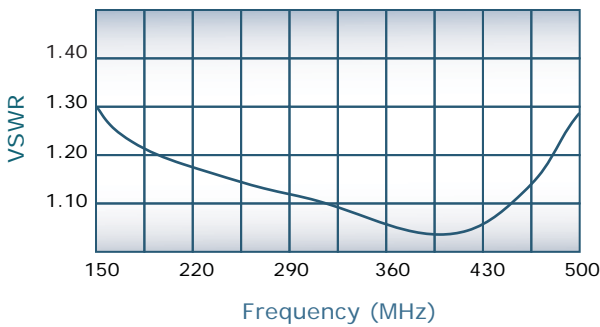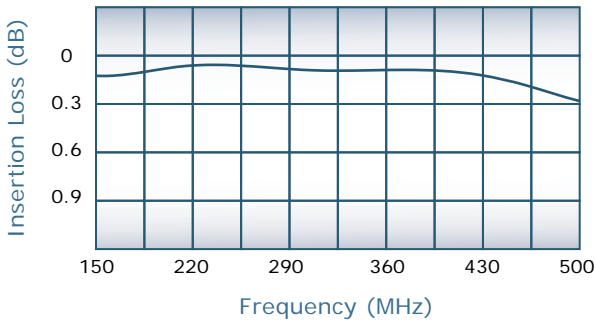

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 5 Ounces
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J1 (Sum Port)	J2,J3 (Input/Output)
D6295-10	N Female	N Female
D6295-12	N Female	SMA
D6295-102	SMA	SMA

