




DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.





17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com



8-Way Combiner/Divider

Model D8421

Frequency:	1.5 - 30 MHz
Power:	12,000 W CW
Insertion Loss:	0.3 dB Max.
VSWR:	1.30:1 Max.
Isolation:	20 dB Min.
Phase Balance:	± 5° Max.
Amplitude Balance:	0.2 dB Max.

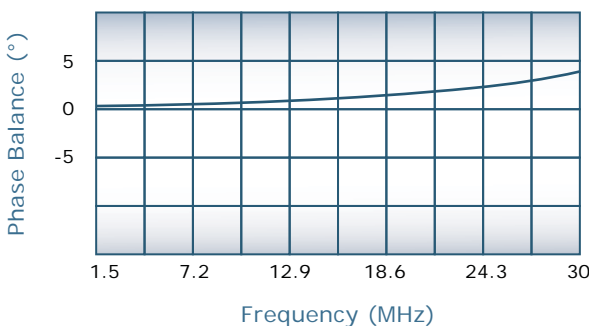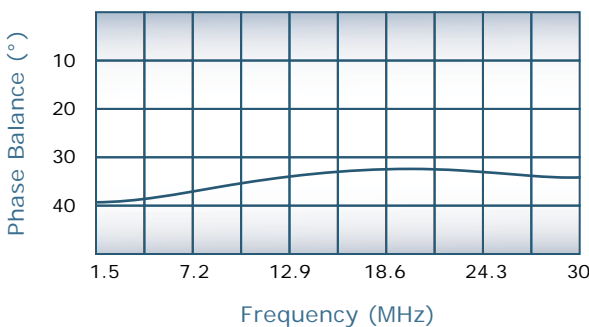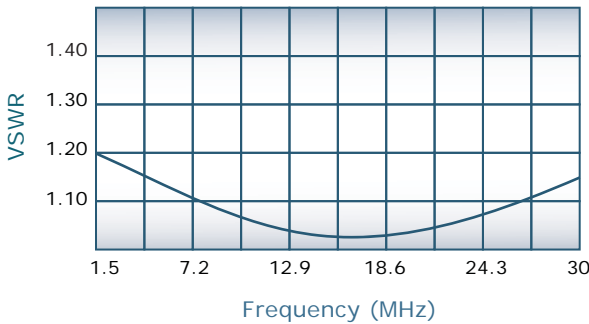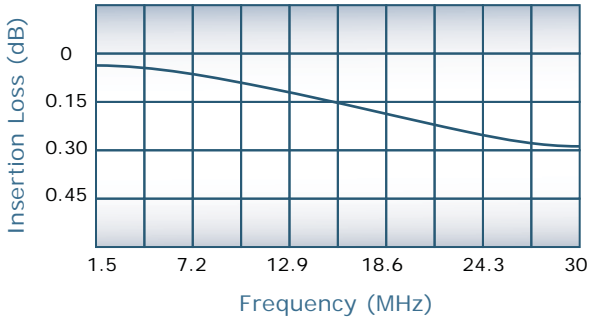

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Weight: 68 Pounds
- Operating Temperature: -55°C to +75°C
- Port J10: 9 PIN D-SUB Fan PWR & Thermistors

Connector Configurations

Model	J9 (Sum Port)	J1-J8 (Input/Output)
D8421-70	7/8" EIA	N Female

