



DECADES AHEAD[®]
high power RF devices







Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
T (845) 278 2220 www.werlatone.com
F (845) 278 3440 sales@werlatone.com

180° Hybrid Combiner/Divider
Model H10298

Frequency:	2000 - 6000 MHz
Power:	100 W CW
Insertion Loss:	1.0 dB Max.
VSWR:	1.35:1 Max.
Isolation:	20 dB Min.
Phase Balance:	180° ± 6° Max.
Amplitude Balance:	0.4 dB Max.

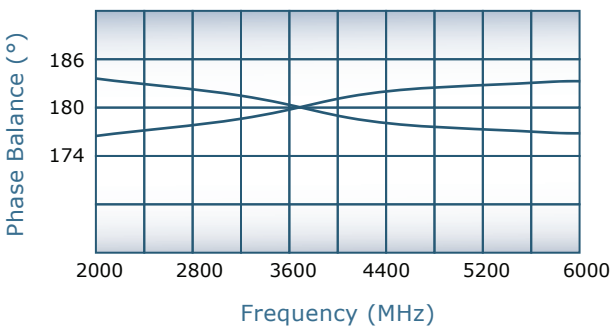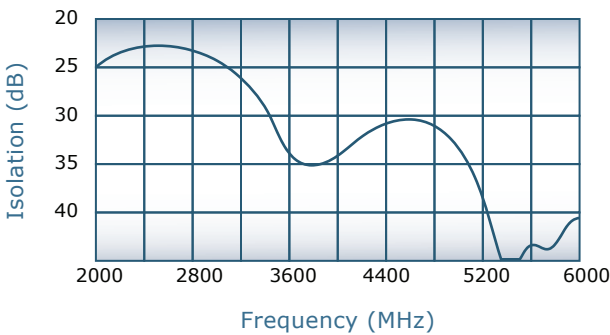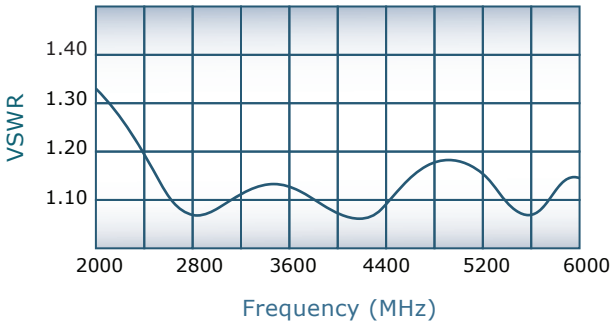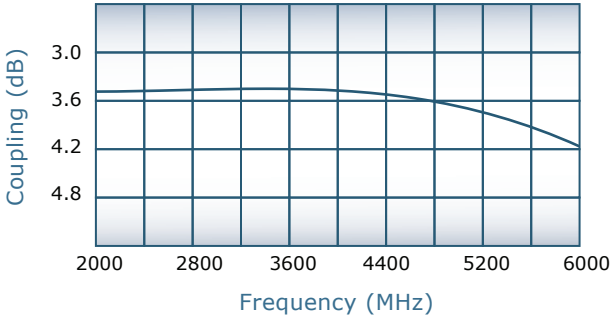

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Operating Temperature: -55°C to +85°C

Connector Configurations

Model	J1 (Diff Port)	J2, J3 (Inputs/Outputs)	J4 (Sum Port)
H10298-102	SMA	SMA	SMA

