

PRODUCT DATA SHEET

QH10900

Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 380 - 2500 MHz
 Power: 150 W CW
 Insertion Loss: 0.55 dB Max.
 VSWR: 1.35:1 Max.
 Phase Balance: $\pm 5^\circ$ dB Max.
 Amplitude Balance: ± 0.6 dB Max.
 Isolation: 18 dB Min.

Mechanical Specifications:

Type: Drop-In
 Plating Options: QH10900-Ag: Immersion Silver (RoHS)
 Size: 1.3 x 1.3 x 0.15"

Port Configurations:

J1	J2	J3	J4
Input	-3 dB, 0°	-3 dB, -90°	Isolated
-3 dB, 0°	Input	Isolated	-3 dB, -90°
-3 dB, -90°	Isolated	Input	-3 dB, 0°
Isolated	-3 dB, -90°	-3 dB, 0°	Input

Unit can be ordered with or without Solder Tabs. Add "-T" after plating code for Tabbed unit.


See 90° Drop-In Application Note for more information.

Werlatone's breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.



WERLATONE

Model QH10900




PRODUCT DATA SHEET


QH10900

Performance Data (Specifications subject to change without notice):


Coupling:

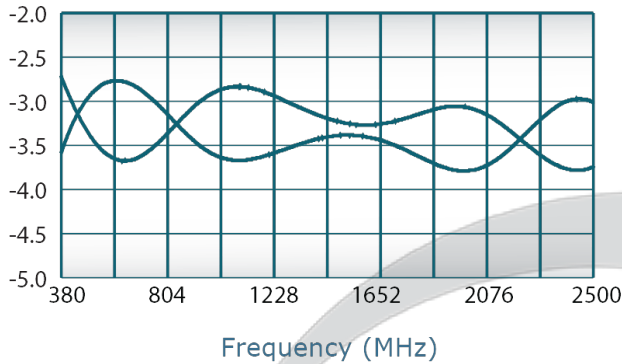


VSWR:

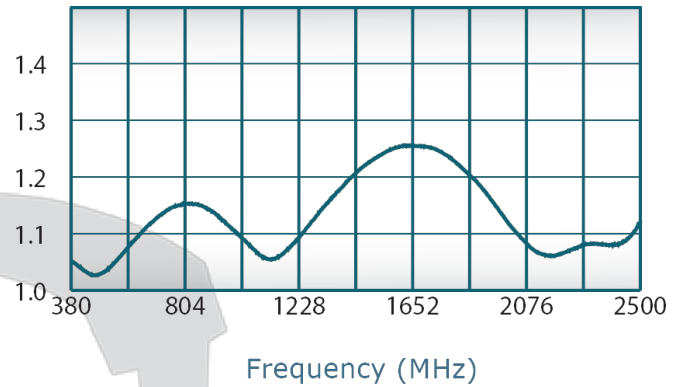

Isolation:

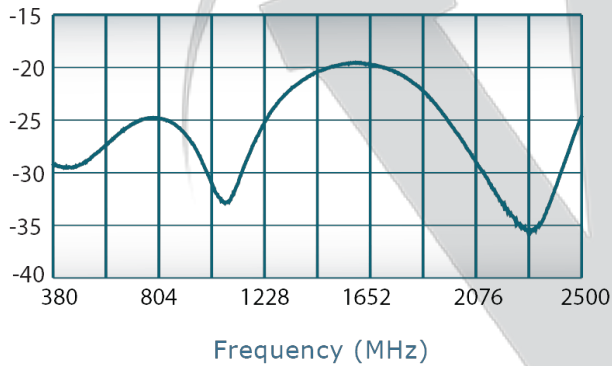

Phase Balance:

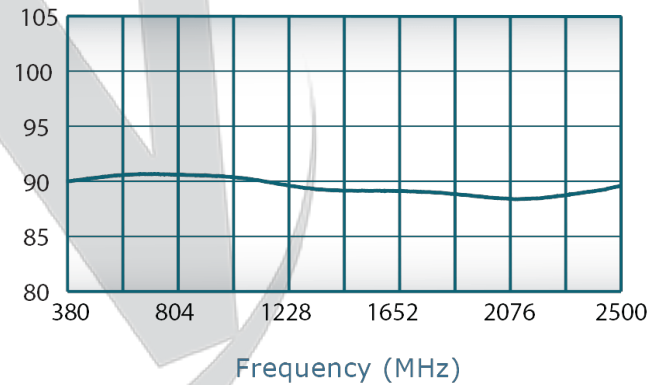


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	R/E	REVISION RECORD	AUTH	CHK	APPV
10/27/2016	-	INITIAL RELEASE	GP	CS	BW

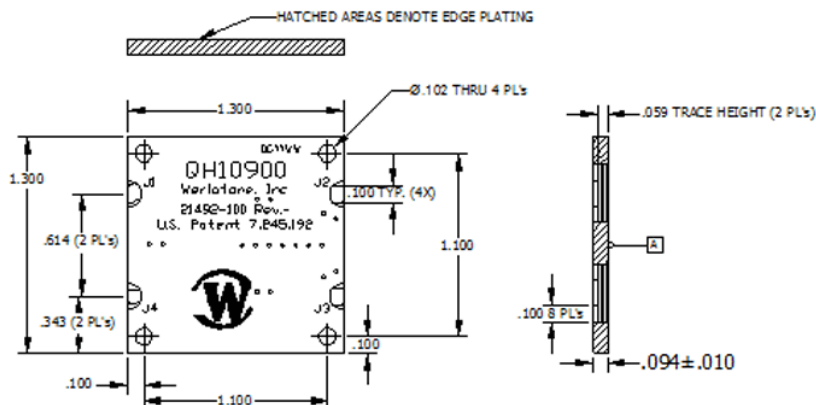

NOTES: UNLESS OTHERWISE SPECIFIED

1. MOUNT COUPLER WITH SURFACE "A" CONTACTING ADEQUATE HEATSINK.
2. STRIPLINE COUPLER HAS 4 EXPOSED COPPER PADS. PCB SHOULD HAVE A CUTOUT TO ACCOMMODATE PART. ALIGN 50 ? LANDS WITH PAD AND MAKE SOLDER JOINT WITH LEAD (NOT SUPPLIED).
3. Surface Finish: Immersion Silver (RoHS)

UNLESS OTHERWISE SPECIFIED		DATE	10/27/2016	WERLATONE SINCE 1965		17 Jon Barrett Road Patterson, NY 12563	
• INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009		DATE		TITLE		2-WAY 90° HYBRID COUPLER	
• DIMENSIONS ARE IN INCHES		DATE		USED ON		QH10900	
• DIMENSIONS ARE IN INCHES		DATE		SIZE		A 28812	
• DIMENSIONS ARE IN INCHES		DATE		CAGE CODE		21492-500	
• DIMENSIONS ARE IN INCHES		DATE		DWG NO		21492-500	
• DIMENSIONS ARE IN INCHES		DATE		SCALE		1:1	
• DIMENSIONS ARE IN INCHES		DATE		SHEET 1 OF 1			

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com