


PRODUCT DATA SHEET
C5134

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 10 - 55 MHz
Power: 20,000 W CW
Coupling: 50 ± 1.0 dB Max.
Insertion Loss: 0.1 dB Max.
Flatness: ± 0.5 dB Max.
VSWR (ML): 1.10:1 Max.
Directivity: 25 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 3.0 x 2.24"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C5134-30	LC Female	LC Female	N Female	N Female
C5134-33	LC Female	LC Female	BNC	BNC
C5134-503	SQS Female	SQS Female	BNC	BNC
C5134-7501	SQS Male	SQS Female	N Female	N Female
C5134-7503	SQS Male	SQS Female	BNC	BNC
C5134-QC-4	QC Block	SQS Female	BNC	BNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C5134




PRODUCT DATA SHEET


C5134

Performance Data (Specifications subject to change without notice):


Coupling:

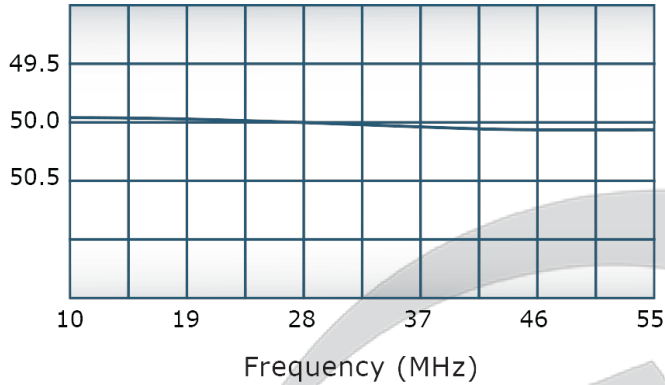


VSWR:

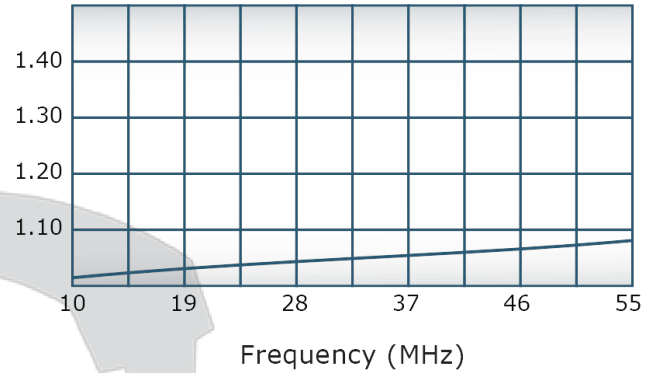

Insertion Loss:

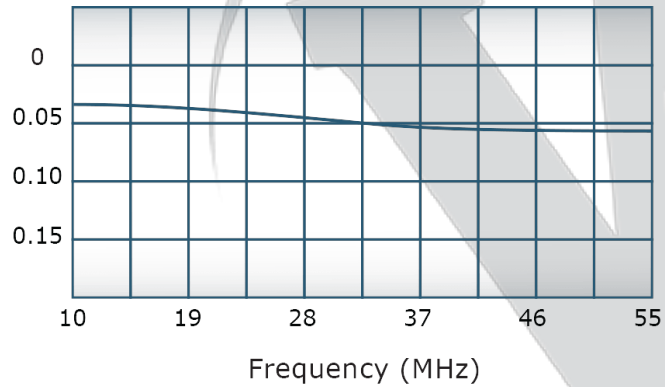

Directivity:

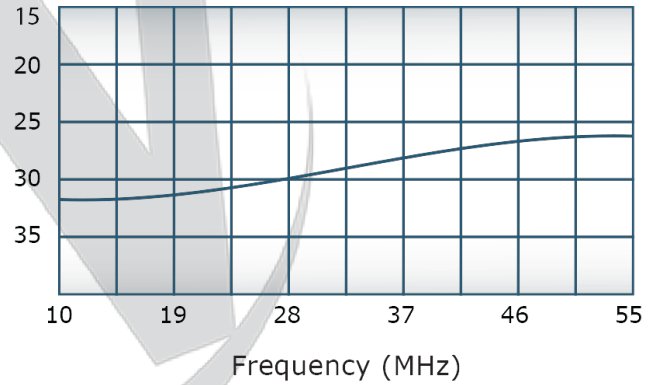




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

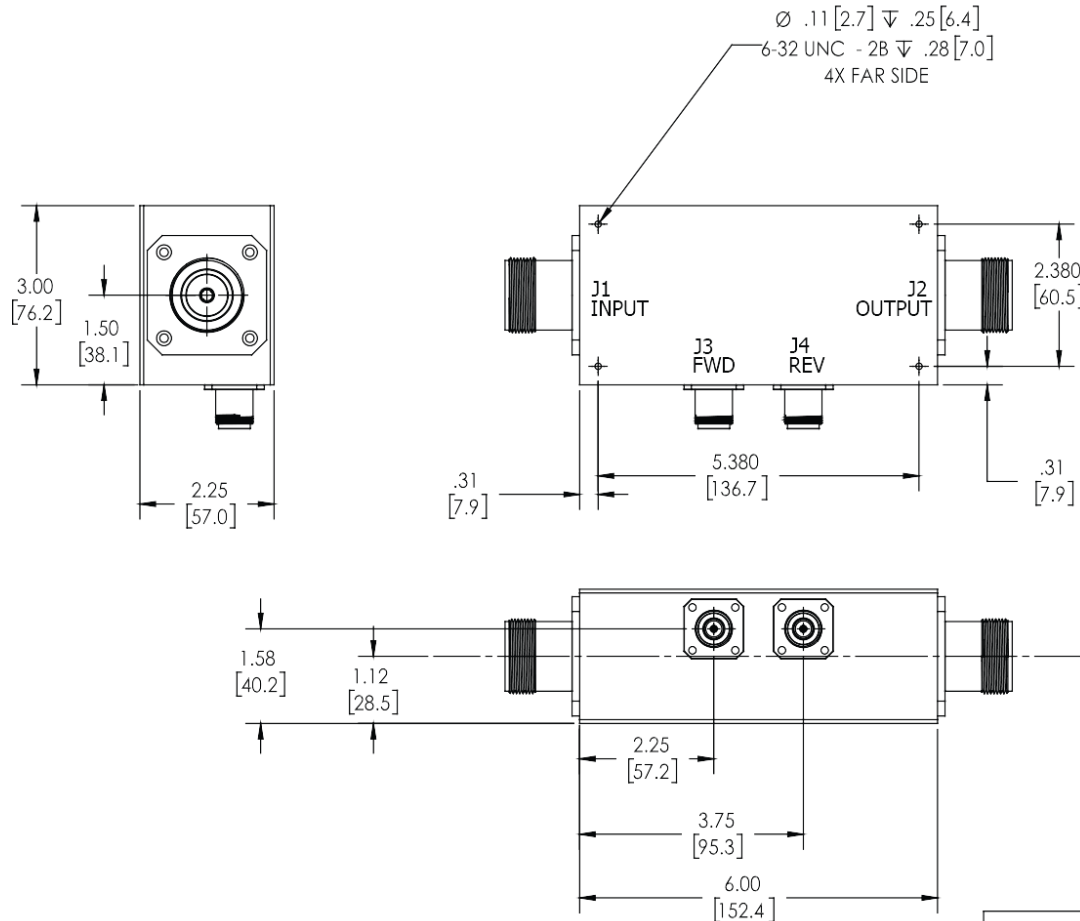REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	10/29/2018	CS



		UNLESS OTHERWISE SPECIFIED		OWN	DATE		WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563		
		• INTERPRET DRAWING JAW MIL-STD-100		PLP	10/25/2018						
		• DIMENSIONING PER ASME Y14.3M-2009		CHK	DATE						
		• PRELIMINARY DIMS FOR REF ONLY		CS	10/29/2018		TITLE				
		• DIMENSIONS ARE IN INCHES (mm)		ENGR	DATE						
		• DIMENSIONAL UNITS APPLY BEFORE PROCESSES		INFR	DATE						
		• TOLERANCES:									
		ANGLES: ± 2°									
		2 PL ± .005 (1.3)									
		2 PL ± .015 (4)									
		• REMOVE ALL BURRS AND SHARP EDGES R.03 MAX				SIZE		CASE CODE	DWG NO	REV	
		• CONCENTRICITY MACHINED DIA: .002 FIM				B		28812	10396-500	-	
		• MACHINE TOOL REPAIR: .003 MAX									
NEXT ASSY		USED ON				SCALE		1:2	SHEET 1 OF 1		
APPLICATION		THIRD ANGLE PROJECTION									

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com