

## PRODUCT DATA SHEET

C9552

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Features:

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

### Electrical Specifications:

Frequency: 20 - 1000 MHz  
 Power: 150 W CW  
 Coupling:  $30 \pm 1.0$  dB Max.  
 Insertion Loss: 0.8 dB Max.  
 Flatness:  $\pm 0.5$  dB Max.  
 VSWR (ML): 1.30:1 Max.  
 Directivity: 20 dB Min.


### Mechanical Specifications:

Type: Connectorized  
 Material: Aluminum 6061-T6  
 Surface Finish: Chem. Film Per MIL-DTL-5541F  
 Type I Class 3 (Yellow Iridite)  
 RoHS Compliant Available  
 Operating Temperature: -55°C to +75°C  
 Storage Temperature: -60°C to +85°C  
 Humidity: 95% Non-Condensing  
 Size: 3.0 x 2.0 x 1.0"

### Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C9552-10	N Female	N Female	N Female	N Female
C9552-12	N Female	N Female	SMA	SMA
C9552-102	SMA	SMA	SMA	SMA

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




## PRODUCT DATA SHEET


C9552

### Performance Data (Specifications subject to change without notice):


Coupling:

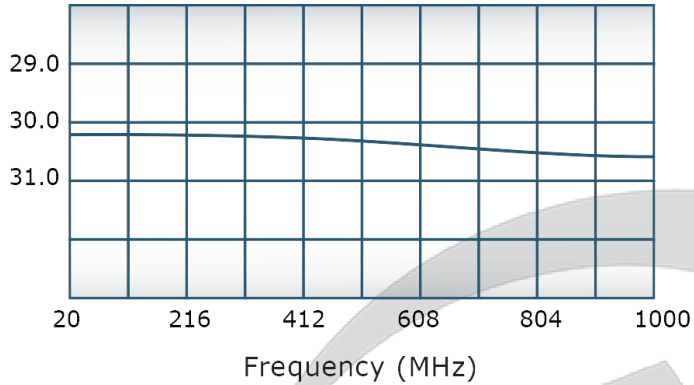


VSWR:

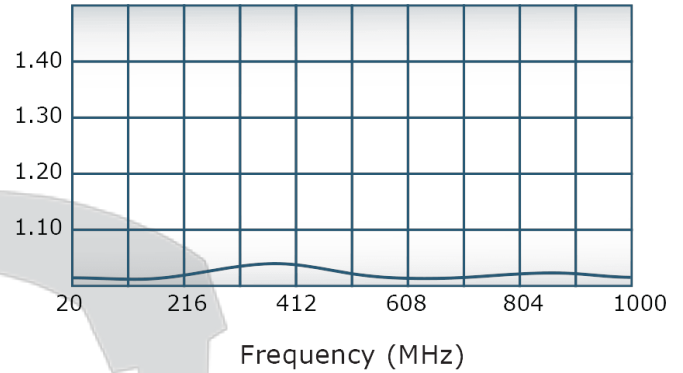

Insertion Loss:

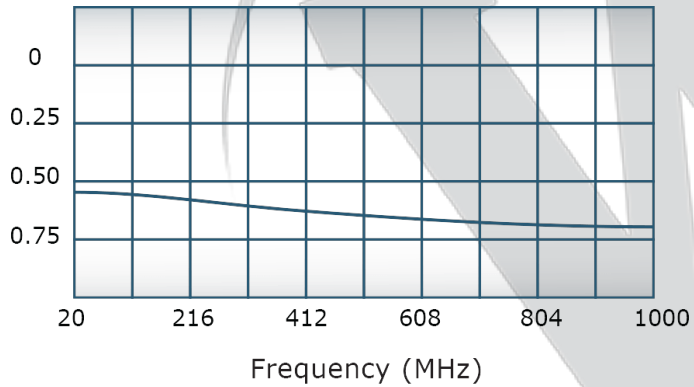

Directivity:



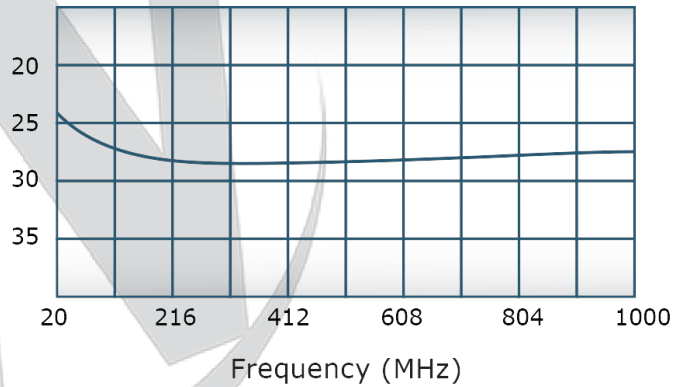



**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

**RESTRICTION ON USE, DUPLICATION OR  
DISCLOSURE OF PROPRIETARY INFORMATION**  
This document contains proprietary information  
which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
1	INITIAL RELEASE	8/31/2011	BW

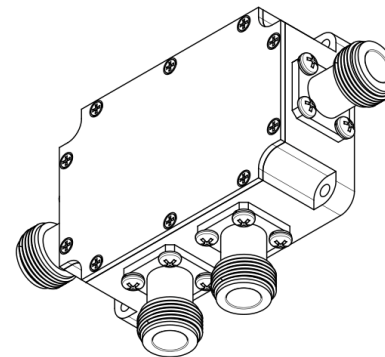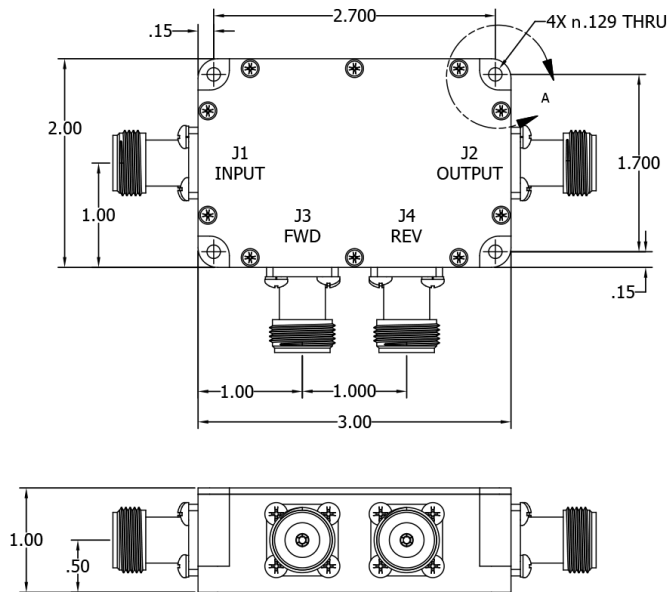

UNLESS OTHERWISE SPECIFIED				DRAWN	DATE	17 Jon Barrett Rd Patterson, NY 12563	
• INTERPRET DRAWING IN ACCORDANCE WITH ISO-100				CP	2/25/13	 <b>WERLATONE</b> SINCE 1965	
• DIMENSIONS ARE IN INCHES				CHK	DATE		
• DIMENSIONS ARE IN INCHES				CS	2/25/13	TITLE	
• DIMENSIONAL LIMITS APPLY BEFORE PROCESSING				ENGR	DATE	SIZE CASE CODE DWG NO <b>B 2881221012-500</b>	
• TOLERANCES: ANGLES ±2°				MPGR	DATE		
3 PL ±.005				QA	DATE	REV	
2 PL ±.015				RLSE	DATE	SCALE	
THIRD ANGLE PROJECTION						1:1	
						SHEET 1 OF 1	

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com