

PRODUCT DATA SHEET D1994 Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size High Isolation **Custom Designs Available Electrical Specifications:** 20 - 100 MHz Frequency: Power: 600 W CW Insertion Loss: 0.3 dB Max. VSWR: 1.30:1 Max. Phase Balance: + 5° Max. Amplitude Balance: 0.2 dB Max. Isolation: 20 dB Min. Mechanical Specifications: Connectorized Type: Material: Aluminum 6061-T6 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: 1 lb. 9 oz. Weight: 5.0 x 3.0 x 2.3" Size: **Connector Configurations:** Sum Port (J1) Input/Output (J2) Input/Output (J3) Model N Female N Female N Female D1994-10 D1994-12 N Female SMA SMA When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

Way Combiners are available upon request.

D1994 Rev.-



PRODUCT DATA SHEET



D1994


VSWR: Insertion Loss: 1.40 0 1.30 0.1 1.20 0.2 0.3 1.10 20 36 52 68 84 100 20 36 52 68 84 100 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 20 25 5 30 0 35 -5 40 20 36 52 68 84 100 52 68 84 100 20 36 Frequency (MHz) Frequency (MHz)

Performance Data (Specifications subject to change without notice):

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D1994 Rev.-

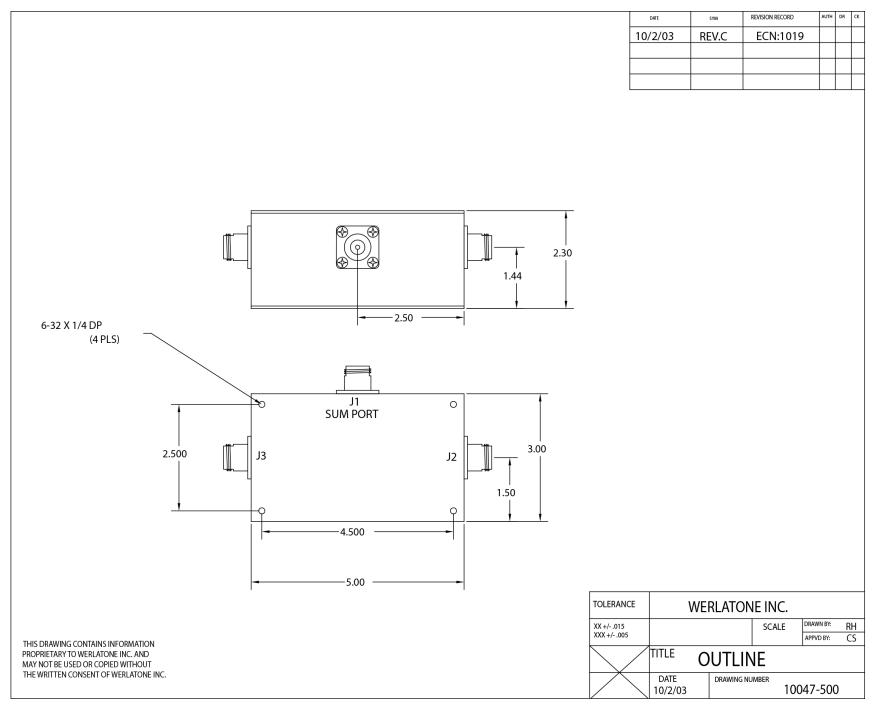

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com