

| PRODUCT | DATA SHEET | | | | D6431 |
|---------|---|---|---|---|--|
| | Werlatone Mismatch Tolerant High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. | | | | |
| | Features: | | | | |
| | High Power | Wide Bandwidths | Small Size | High Isolation | Custom Designs Available |
| | Electrical Specifications: Frequency: 1750 - 1850 MHz Power: 50 W CW Insertion Loss 0.3 dB Max. VSWR: 1.30:1 Max. Phase Balance: ± 5° dB Max. Amplitude Balance: 0.15 dB Max. Isolation: 20 dB Min. Mechanical Specifications: Type: Connectorized Material: Aluminum 6061-T6 Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available Operating Temperature: -55°C to +75°C Storage Temperature: -60°C to +85°C Weight: 1.5 oz. Size: 2.1 x 1.5 x 0.43" | | | | |
| | | | | | |
| | Model D6393-102 | Sum Port (J1) SMA | Input/Output (J SMA | 2) Input/Ou SMA | tput (J3) |
| | adjacent port(s) can be properly Additional conne | . This insures that rem shut down for mainte | naining transmitter nance. Choose you or our High Power R | (s) may continue to c r specific connector o | will tolerate full input failures on operate until the amplifier system configuration from a list of options. s, Non-Coherent Combiners, and N- |


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D6431 Rev.-



PRODUCT DATA SHEET




D6431

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0 1.30 0.1 1.20 0.2 0.3 1.10 1750 1770 1790 1810 1830 1850 1750 1770 1790 1810 1830 1850 Frequency (MHz) Frequency (MHz) Isolation: Phase Balance: 20 25 5 30 0 35 -5 40 1750 1770 1790 1810 1830 1770 1850 1790 1810 1830 1850 1750 Frequency (MHz) Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D6431 Rev.-

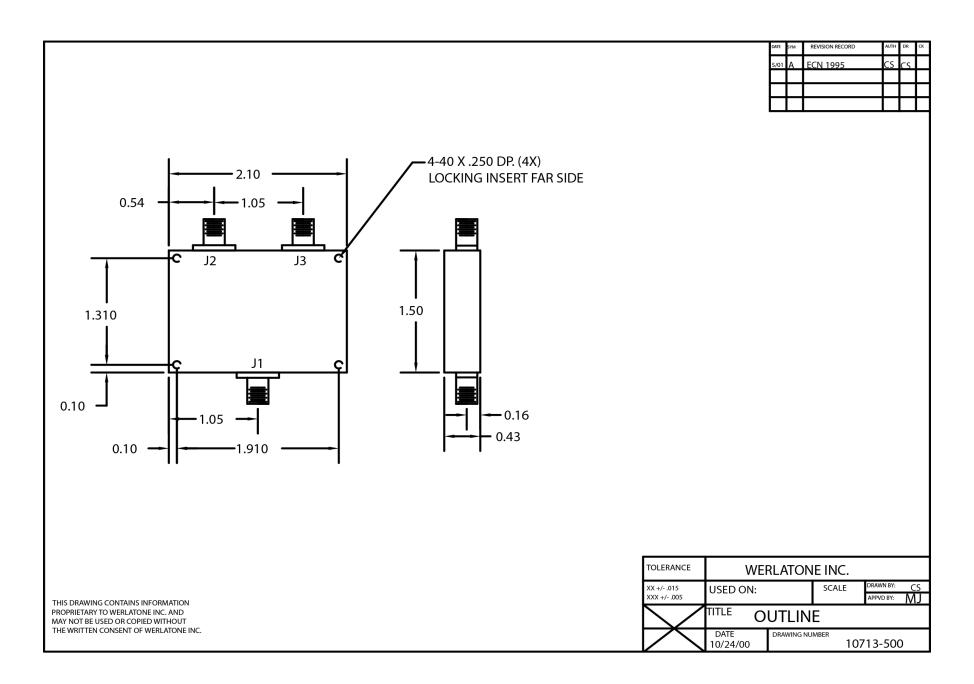

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com