



PRODUCT DATA SHEET

D7243

Werlatone® Mismatch Tolerant® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide **Werlatone®** designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

Features:

High Power Wide Bandwidths Small Size High Isolation Custom Designs Available

Electrical Specifications:

Frequency: 1000 - 2000 MHz
Power: 800 W CW
Insertion Loss: 0.2 dB Max.
VSWR: 1.40:1 Max.
Phase Balance: $\pm 5^\circ$ Max.
Amplitude Balance: 0.1 dB Max.
Isolation: 15 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Weight: 11 oz. (-41)
Size: 3.0 x 2.5 x 1.21"

Connector Configurations:

Model	Sum Port (J1)	Input/Output (J2)	Input/Output (J3)
D7243-10	N Female	N Female	N Female
D7243-20	7/16 Female	N Female	N Female
D7243-22	7/16 Female	SMA	SMA
D7243-41	SC Female	N Female	N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.



WERLATONE

Model D7243

Combiners In-Phase Connectorized




PRODUCT DATA SHEET


D7243

Performance Data (Specifications subject to change without notice):


Insertion Loss:

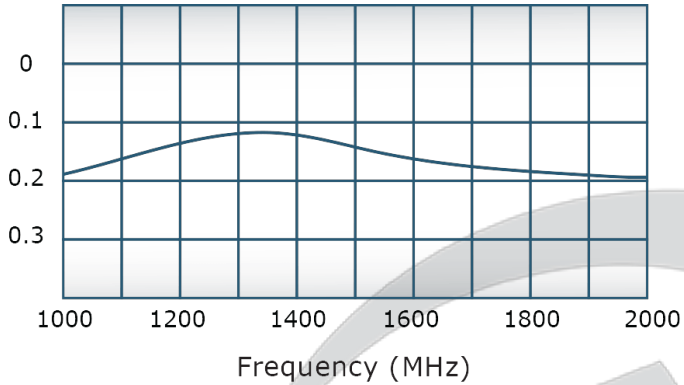


VSWR:

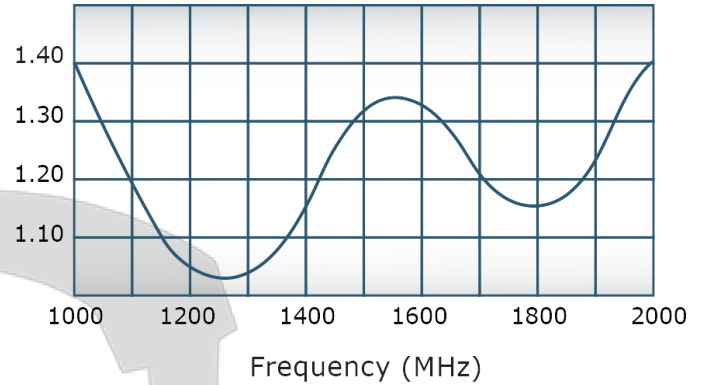

Isolation:

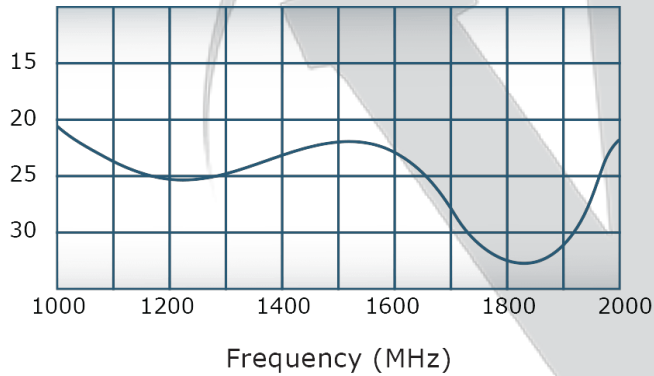


Phase Balance:

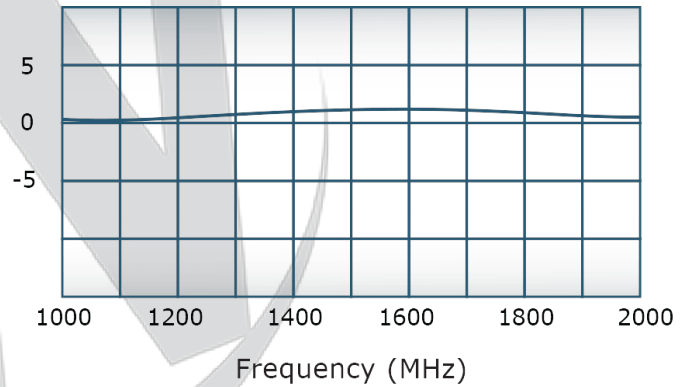

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

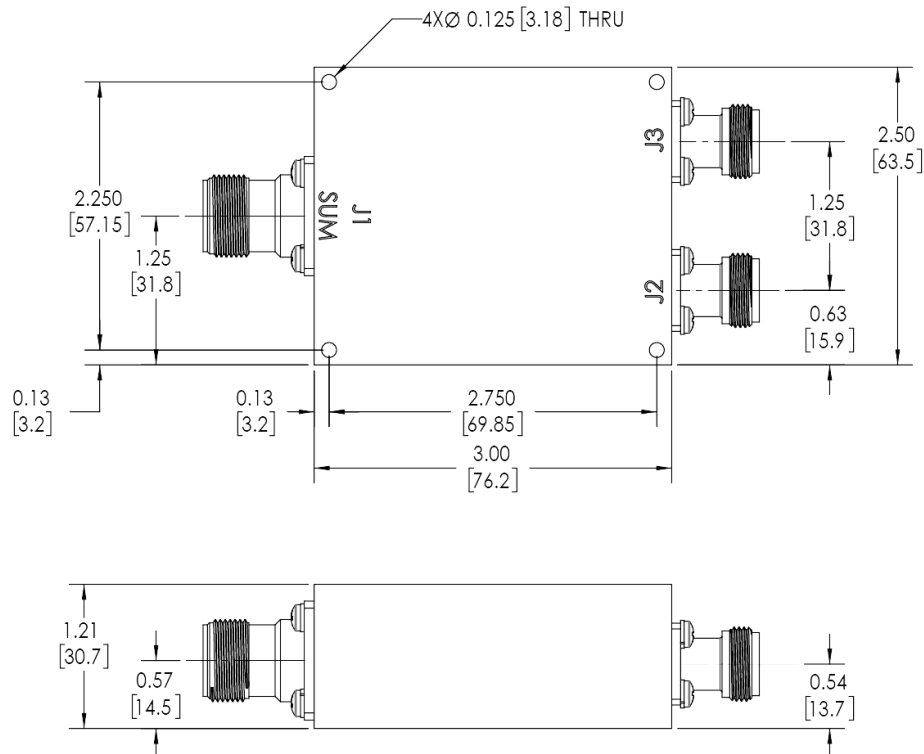

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/19/2019	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1: SC FEMALE
J2-J3: N FEMALE

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563	
		INTERPRET DRAWING 1001 MIL-STD-100		SD	11/19/2019			
		DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE			
		PARENTHESES FOR REF ONLY		CS	11/19/2019			
		DIMENSIONS ARE IN INCHES		ENGR	DATE	TITLE		
		DIMENSIONAL LIMITS APPLY BEFORE FINISHES				<h1>OUTLINE</h1>		
		TOLERANCES:						
		ANGLES ± 2°						
		3 PL ± .005 [13]						
		2 PL ± .015 [38]				SIZE		
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX				CAGE CODE		
		CONCENTRICITY MACHINED DIA. .002 FIM				DWG NO		
		MACHINE TOOL MATCH .003 FIM				REV		
NEXT ASSY		USED ON		QA	DATE	A		
APPLICATION		THIRD ANGLE PROJECTION 		RLSE	DATE	SCALE		
						B		
						1:1		
						10969-500		
						SHEET 1 OF 1		

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com