

Combiners In-Phase Connectorized Radial



D9559

PRODUCT DATA SHEET Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions. Features: High Power Wide Bandwidths Small Size **Custom Designs Available Electrical Specifications:** 2200 - 2750 MHz Frequency: Power: 40 W CW Insertion Loss: 0.4 dB Max. VSWR: 1.40:1 Max. Phase Balance: + 4° Max. Amplitude Balance: 0.25 dB Max. Isolation: Non-Isolated Mechanical Specifications: Connectorized Type: Aluminum 6061-T6 Material: Surface Finish: Chem. Film Per MIL-DTL-5541F Type II Class 3 (Trivalent) -55°C to +75°C Operating Temperature: -60°C to +85°C Storage Temperature: Weight: 1.5 lbs. RADIAL Size: **Connector Configurations:** Sum Port (J33) Input/Output (J1-J32) Model D9559-12 N Female SMA When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system

can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET



D9559

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 0 1.30 0.25 1.20 0.50 0.75 1.10 2310 2530 2200 2310 2420 2530 2640 2750 2200 2420 2640 2750 Frequency (MHz) Frequency (MHz) Since 1965: Phase Balance: 5 0 -5

2200

2310

2420

Frequency (MHz)

2530


2640

2750

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D9559 Rev.-

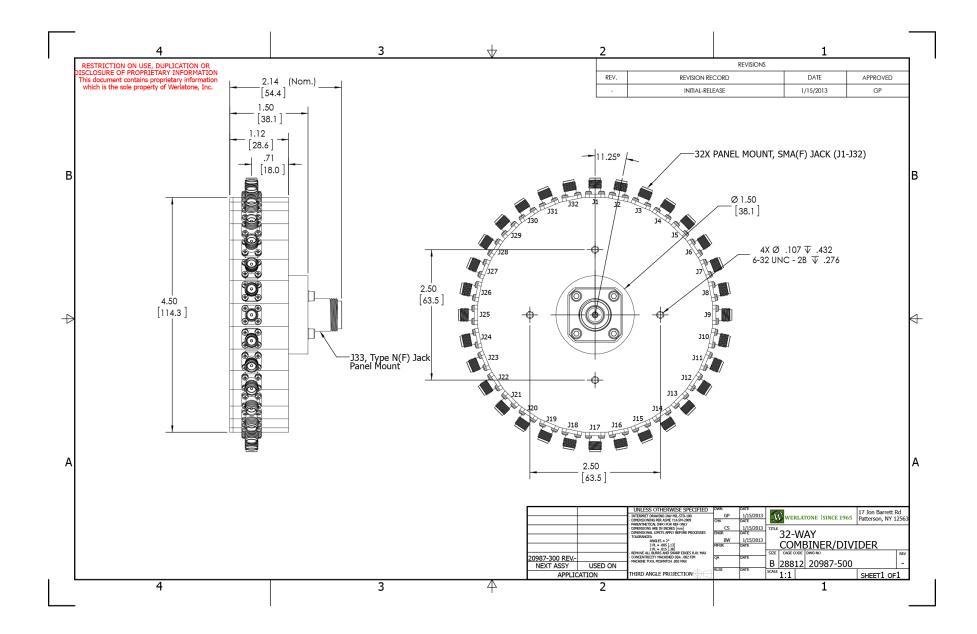

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com