

D9493

### **PRODUCT DATA SHEET**

Werlatone ® Mismatch Tolerant ® High Power Broadband RF Combiners and Dividers will operate into High Load VSWR Conditions, for extended periods, without damage. With extensive experience as a supplier to military platforms worldwide Werlatone® designs its High Power Broadband Combiners, Power Dividers, and N-Way Combiners for proper operation in the most stringent operating conditions.

#### Features:

High Power

Wide Bandwidths

Small Size

**Custom Designs Available** 

## **Electrical Specifications:**

Frequency:	400 - 500 MHz
Power:	100 W CW
Insertion Loss:	0.4 dB Max.
VSWR:	1.30:1 Max.
Phase Balance:	<u>+</u> 3° Max.
Amplitude Balance:	0.25 dB Max.
Isolation:	No Isolation

#### Mechanical Specifications:

Type: Material: Surface Finish:

Operating Temperature: Storage Temperature: Weight: Size:

Connectorized Aluminum 6061-T6 Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available -55°C to +75°C -60°C to +85°C 3 lbs. 9.5 x 4.1 x 1.125"

#### **Connector Configurations:**

Model D9493-10

Sum Port (J9) N Female

Input/Output (J1-J8) N Female

When specified, Werlatone® High Power Combiners and RF Dividers will tolerate full input failures on adjacent port(s). This insures that remaining transmitter(s) may continue to operate until the amplifier system can be properly shut down for maintenance. Choose your specific connector configuration from a list of options. Additional connector configurations for our High Power RF Combiners/Dividers, Non-Coherent Combiners, and N-Way Combiners are available upon request.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



# **PRODUCT DATA SHEET**



D9493

Performance Data (Specifications subject to change without notice): VSWR: Insertion Loss: 1.40 1.30 0.2 1.20 0.4 0.6 1.10 400 420 440 460 480 500 400 420 440 460 480 500 Frequency (MHz) Frequency (MHz) For In-Building Applications: Phase Balance: 5 0 -5

400

420

Frequency (MHz)

460

440


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

D9493 Rev.-

500

480

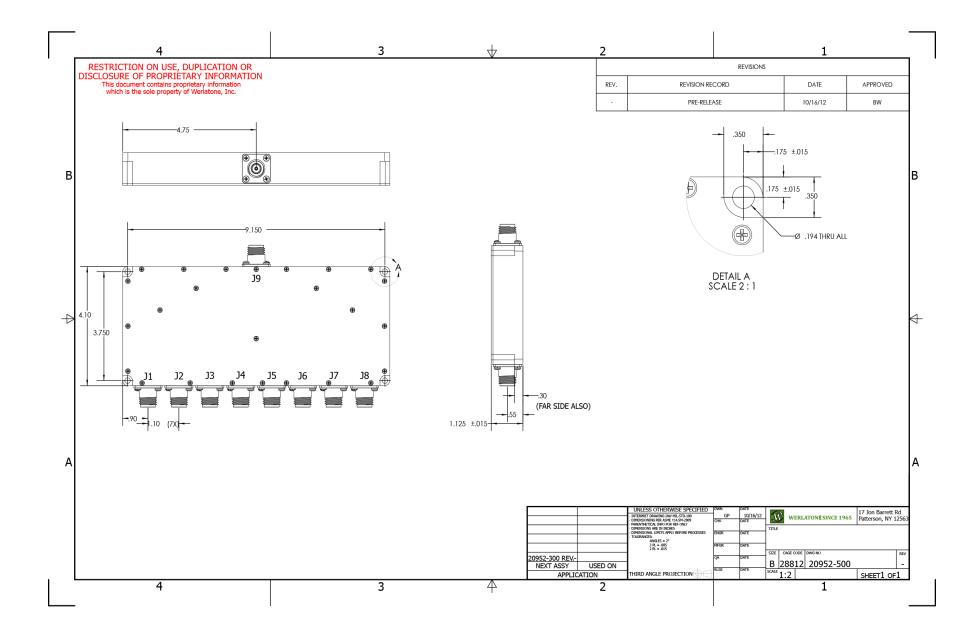

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com