



## PRODUCT DATA SHEET

QH6258

### Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

### Features:

High Power      Wide Bandwidths      Small Size      Connectorized      Drop-In & Surface Mount

### Electrical Specifications:

Frequency: 400 - 1000 MHz  
Power: 1500 W CW  
Insertion Loss: 0.3 dB Max.  
VSWR: 1.30:1 Max.  
Phase Balance:  $90^\circ \pm 5^\circ$  Max.  
Amplitude Balance:  $\pm 0.75$  dB Max.  
Isolation: 18 dB Min.

### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Weight: 1.375 lbs.  
Size: 5.6 x 2.38 x 1.13"

### Connector Configurations:

Model	Sum Port (J1)	Inputs (J2, J3) (-90°, 0°)	Ext. Load Port
QH6258-10	N Female	N Female	N Female
QH6258-12	N Female	SMA	SMA
QH6258-20	7/16 Female	N Female	N Female
QH6258-22	7/16 Female	SMA	SMA
QH6258-40	SC Female	SC Female	SC Female
QH6258-41	SC Female	N Female	N Female

**Werlatone's** breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



# WERLATONE

Model QH6258  
90° Hybrids Connectorized




## PRODUCT DATA SHEET


QH6258

### Performance Data (Specifications subject to change without notice):


Coupling:

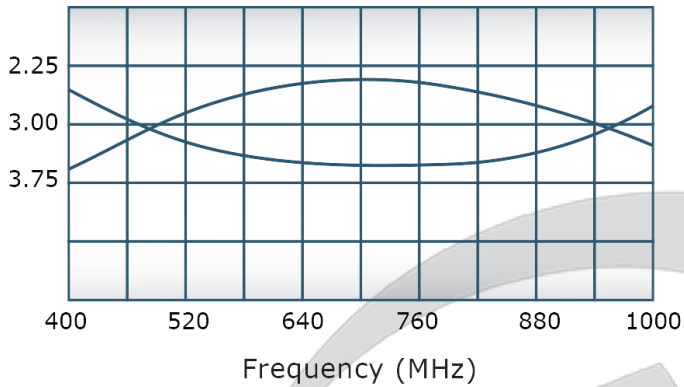


VSWR:

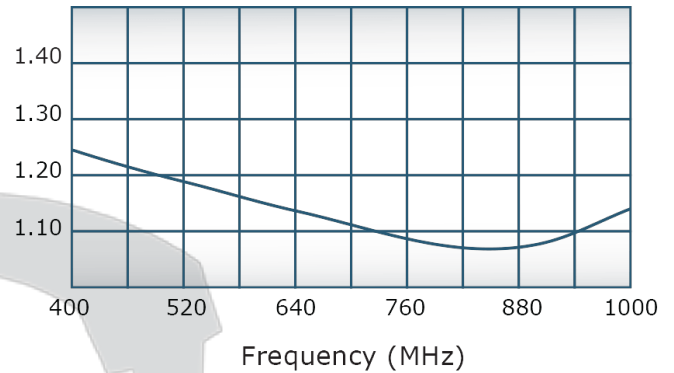

Isolation:

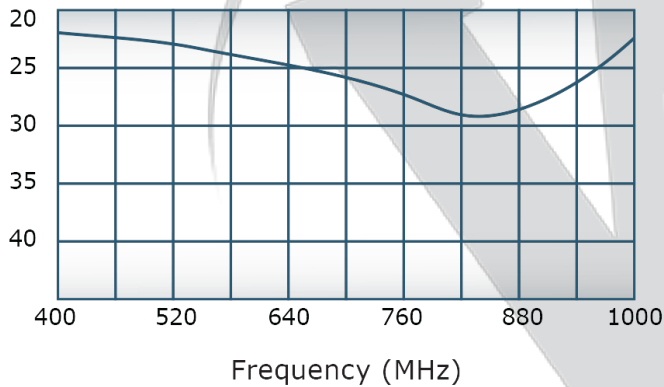




Phase Balance:

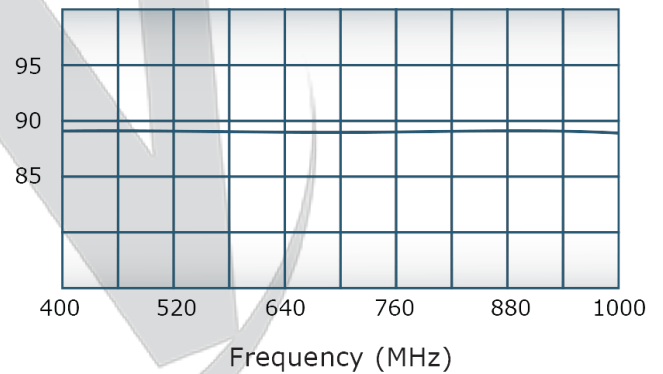

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

DATE	SYM	REVISION RECORD	AUTH	DR	CK
2/27/02	3074	REV. A	RH		CS
1/31/07	4156	REV. B	JE		

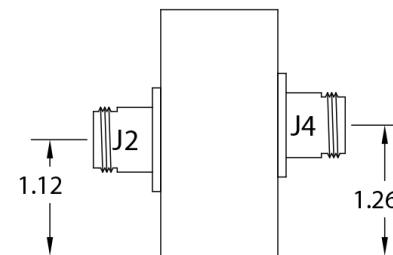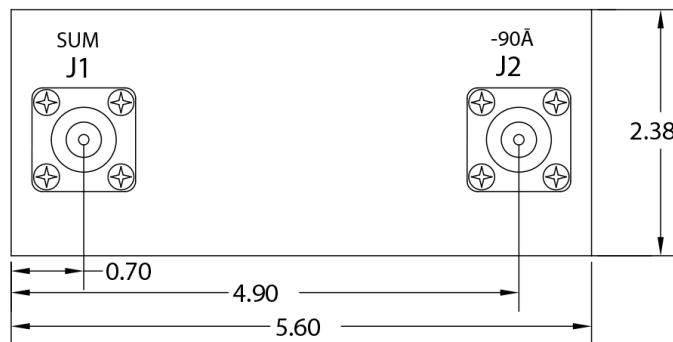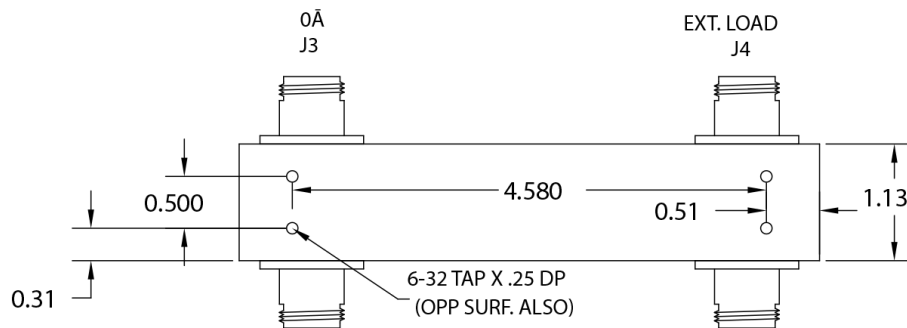

THIS DRAWING CONTAINS INFORMATION  
PROPRIETARY TO WERLATONE INC. AND  
MAY NOT BE USED OR COPIED WITHOUT  
THE WRITTEN CONSENT OF WERLATONE INC.

TOLERANCE	WERLATONE INC.			
XX +/- .015 XXX +/- .005	USED ON:	SCALE	DRAWN BY: RH	APPRD BY:
	TITLE OUTLINE			
	DATE 1/22/02	DRAWING NUMBER 10795-500		

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com