

PRODUCT DATA SHEET QH9497

### Our patented 3 dB 90° Hybrid Couplers provide:

- Superior component performance starting at 3:1 Bandwidth.
- Thicker center boards for high power and increased repeatability.
- Bonded structures which eliminate any air gaps between substrates.
- More sections per bandwidth for better coupling flatness.
- Electrically shorter and physically smaller RF components.

#### Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

## **Electrical Specifications:**

Frequency: 200 - 600 MHz

Power: 200 W CW

Insertion Loss 0.4 dB Max.

VSWR: 1.30:1 Max.

Phase Balance: ± 5° dB Max.

Amplitude Balance: ± 0.35 dB Max.

Isolation: 20 dB Min.

#### **Mechanical Specifications:**

Type: Surface Mount

Plating Options: QH9496-Pb: Electrodeposited Tin/Lead

Size: 2.8 x 1.25 x 0.16"

#### **Port Configurations:**

	Output				
Input	J1	J2	J3	J4	
J1		Isolated	-3 dB, 0°	-3 dB, -90°	
J2	Isolated		-3 dB, -90°	-3 dB, 0°	
J3	-3 dB, 0°	-3 dB, -90°		Isolated	
J4	-3 dB, -90°	-3 dB, 0°	Isolated		

**Werlatone's** breakthrough technology allows us to build our existing line of Broadband 3 dB High Power 90° Hybrid Couplers. Connectorized 3 dB 90° Hybrid Coupler models are available with a choice of connectors. Several of our existing High Power 3 dB 90° RF Couplers are three port designs, wherein the difference port is internally terminated with a high power termination. This eliminates the need for a customer supplied external load for each Hybrid Coupler.


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.





PRODUCT DATA SHEET QH9497

# Performance Data (Specifications subject to change without notice):

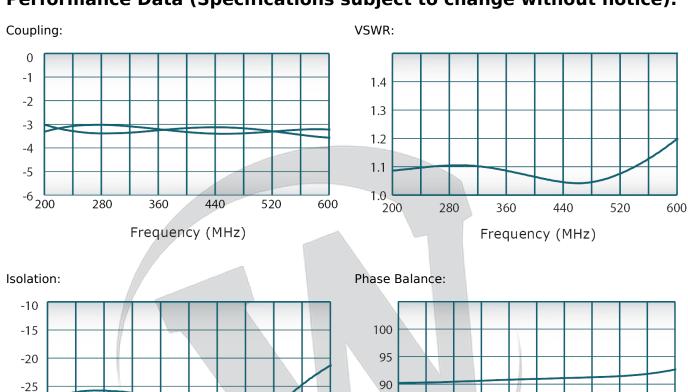

360 440 520 600 200 280 360 440

Frequency (MHz)

Frequency (MHz)

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


-30

-35 200

280

520

600

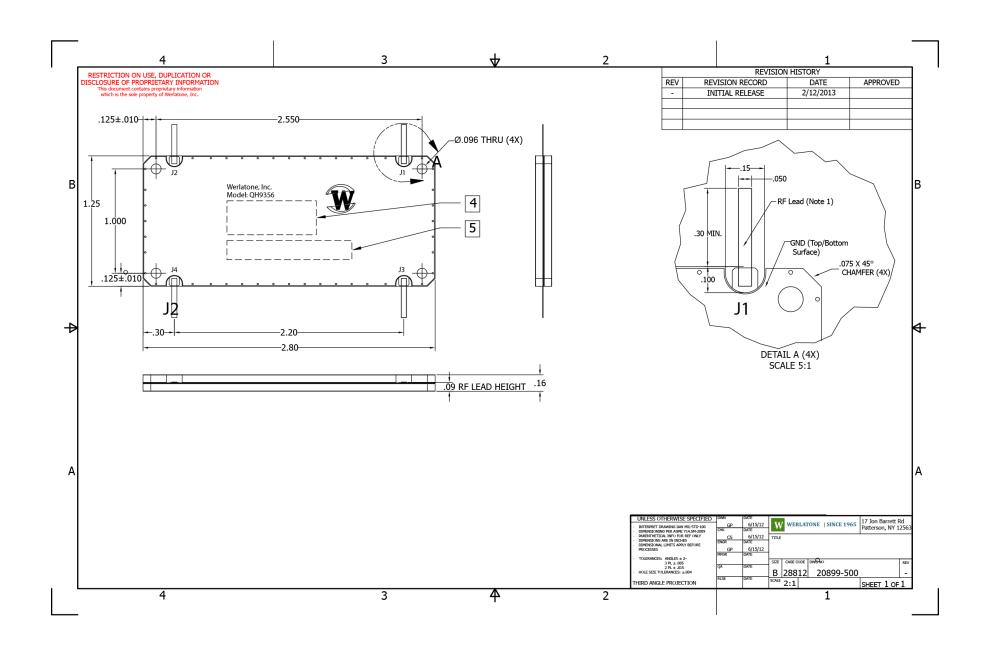

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com