



PRODUCT DATA SHEET

H5817

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 470 - 860 MHz
Power: 1200 W CW
Insertion Loss: 0.2 dB Max.
VSWR: 1.50:1 Max.
Phase Balance: $180^\circ \pm 3^\circ$ Max.
Amplitude Balance: ± 0.1 dB Max.
Isolation: 18 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Size: 2.0 x 5.0 x 1.88"

Connector Configurations:


Model	Sum Port (J1)	Inputs/Outputs (J2,J3)	Isolated Load Port (J4)
H5817-10	N Female	N Female	N Female
H5817-12	N Female	SMA	SMA


Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.

This document contains proprietary information
which is the sole property of Werlatone, Inc.

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/25/2019	RB

1. MATERIAL: ALUMINUM 6061-T6
2. FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)
3. CONNECTORS:
J1-J4: N FEMALE
J4: ISOLATED PORT (EXTERNAL LOAD REQUIRED)

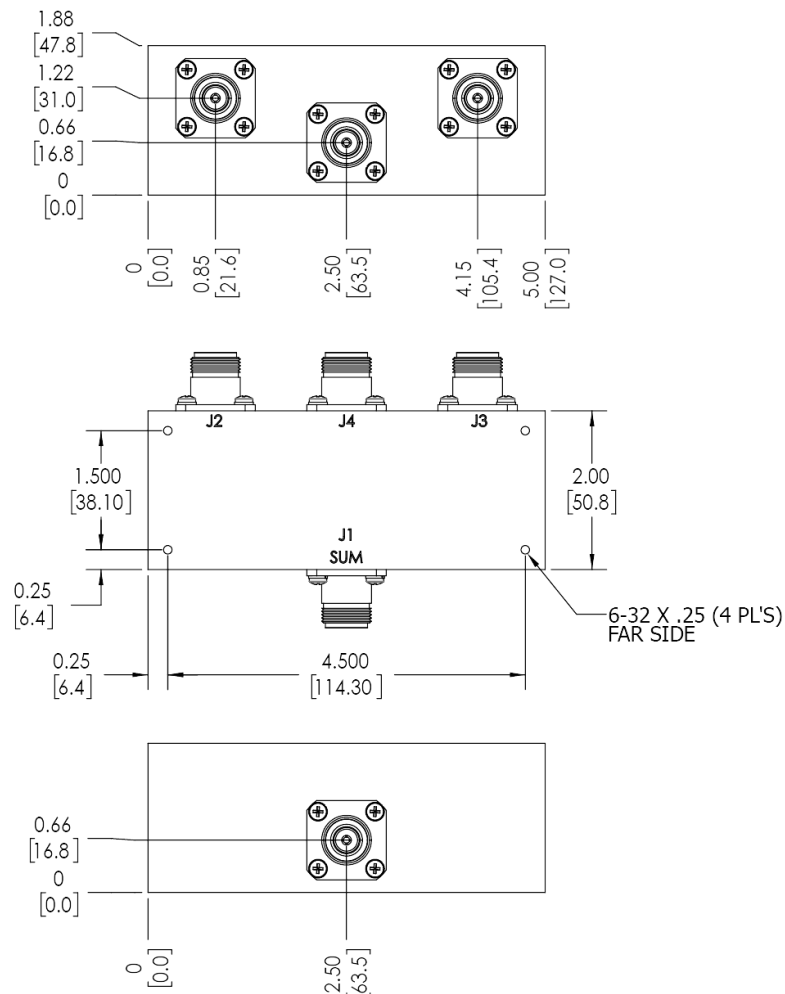

UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12565
INTERPRET DRAWING IN ACC. WITH MIL-STD-100		SD	11/25/2019		
DIMENSIONS PER ASME Y14.5M-2009		CHK	DATE		
PARENT/CHILD ENDS FOR KEY USED		CS	11/25/2019		
DIMENSIONS ARE IN INCHES		TITLE			
DIMENSIONAL LIMITS APPLY BEHIND PROCESSES		INFOR	DATE	<div> <h1>OUTLINE</h1> <div> <div>SIZE</div> <div>CAGE CODE</div> <div>DWG NO</div> </div> <div> <div>10682-500</div> </div> </div>	
TOLERANCES:		REGR	DATE		
ANGLES = 2° 3 P. & .003 (13) 2 P. & .015 (30)		QA	DATE		
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		RLSE	DATE		
CHICKEN/STRICTLY MACHINED DIA. .002 FPM MACHINE TIME .000 MAX		SC	DATE		
NEXT ASSY APPLICATION	USED ON THIRD ANGLE PROJECTION	<div> <div>1.5</div> <div>SHEET 1 OF 1</div> </div>			

•