

PRODUCT DATA SHEET

H7492

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 500 - 2500 MHz
Power: 200 W CW
Insertion Loss: 0.45 dB Max.
VSWR: 1.35:1 Max.
Phase Balance: 180° ± 8° Max.
Amplitude Balance: ± 0.4 dB Max.
Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type I Class 3 (Yellow Iridite) RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Weight: 12 oz.
Size: 4.0 x 2.2 x 0.85"

Connector Configurations:

Model	Sum Port (J1)	Diff. Port (J2)	0°, 180° (J3, J4)
H7492-10	N Female	N Female	N Female
H7492-12	N Female	SMA	SMA
H7492-102	SMA	SMA	SMA

Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.



WERLATONE

Model H7492
180° Hybrids Connectorized




PRODUCT DATA SHEET


H7492

Performance Data (Specifications subject to change without notice):


Coupling:

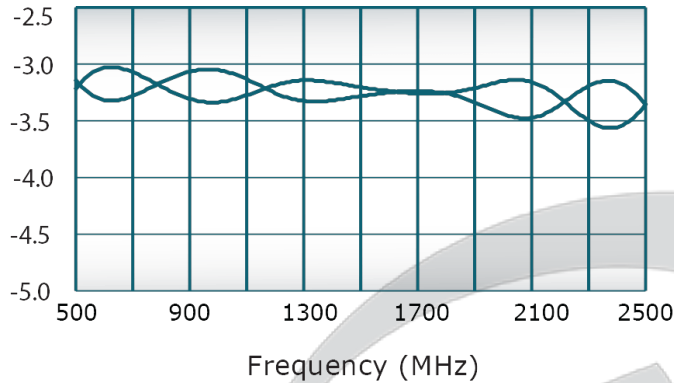


VSWR:

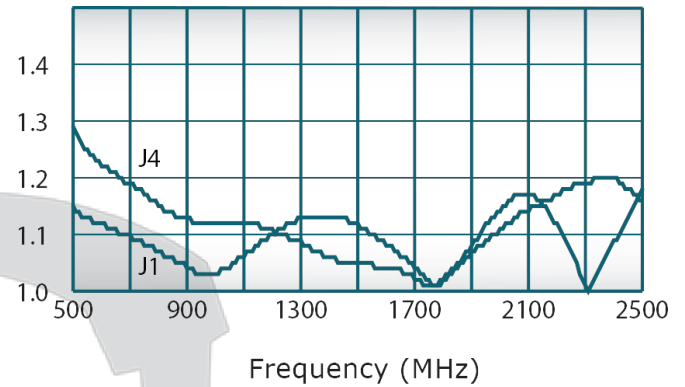

Isolation:

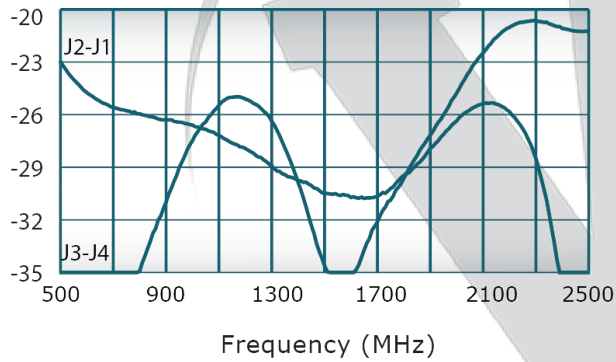

Phase Balance:

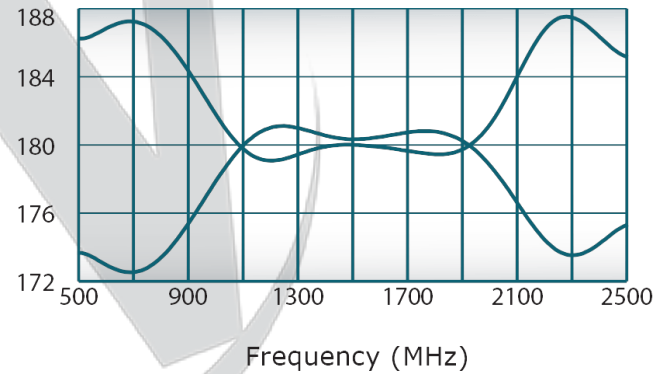


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV
01/26/2010	A	ECN # 5061	NH	BW	BW


FRONT
SCALE 1 / 2

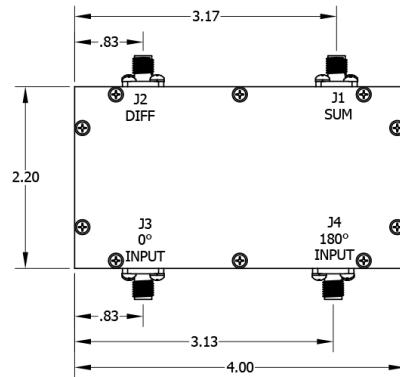

BOTTOM
SCALE 1 / 2

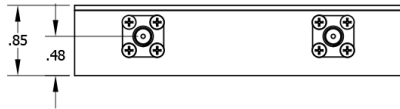

BACK
SCALE 1 / 2

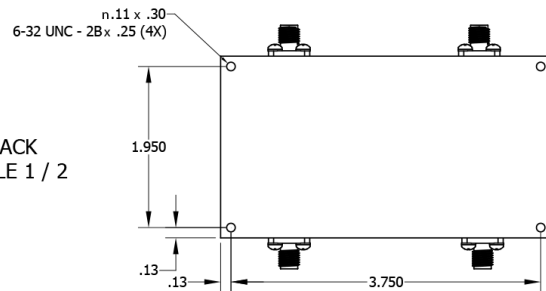

UNLESS OTHERWISE SPECIFIED				DWN	DATE	WERLATONE SINCE 1965		2095 Route 22 Brewster, NY 10509	
* INTERPRET DRAWING IAW MIL-STD-100				NH	1/26/2010	TITLE OUTLINE USED ON		SIZE A 28812 20149-501	
* DIMENSIONING PER ASME Y14.5M-2009				CHK	1/26/2010				
* PARENTHEetical INFO FOR REF ONLY				BW	1/26/2010				
* DIMENSIONS ARE IN INCHES				ENGR	1/26/2010				
* DIMENSIONAL LIMITS APPLY BEFORE PROCESSES				BW	1/26/2010	SCALE		SHEET 1 OF 1	
* TOLERANCES: ANGLES				QA					
.XXX									
.XX				RLSE					
THIRD ANGLE PROJECTION						DWG NO		REV	
						20149-501		A	

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com