

PRODUCT DATA SHEET

H10126

Werlatone® High Power 180° RF Hybrid Combiners/Dividers balance traditional technologies with disruptive microwave techniques. The outcome is a microwave component which provides an order of magnitude improvement over current capabilities. Our newest line of high power, patented 180° RF Hybrid Combiners/Dividers provides an incredible 5:1 bandwidth, while exhibiting exceptionally low loss and superior port-to-port isolation.

Features:

High Power Wide Bandwidths Small Size Excellent Amplitude Balance

Electrical Specifications:

Frequency: 2000 - 6000 MHz
Power: 100 W CW
Insertion Loss: 0.8 dB Max.
VSWR: 1.35:1 Max.
Phase Balance: $180^\circ \pm 7^\circ$ Max.
Amplitude Balance: ± 0.4 dB Max.
Isolation: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F Type II Class 3 (RoHS Compliant)
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Size: 1.15 x 0.6 x 0.14"

Port Configurations:

Model	J1	J2, J3	J4
H10126	Difference Port	Input Ports	Sum Port


Werlatone's standard line of High Power 180° RF Hybrid Combiners/Dividers covers multiple octaves within a microwave device. Low frequency 180° Hybrid Combiner/Dividers employ proprietary ferrite transmission line techniques, similar to our 0° Combiners/Dividers. Insertion loss in both sum and difference ports is minimal, allowing the hybrid to handle high power over its frequency range. Custom requirements are welcome.



WERLATONE

Model H10126

180° Hybrids Surface Mount (SMT) & Drop-In




PRODUCT DATA SHEET


H10126

Performance Data (Specifications subject to change without notice):


Coupling:

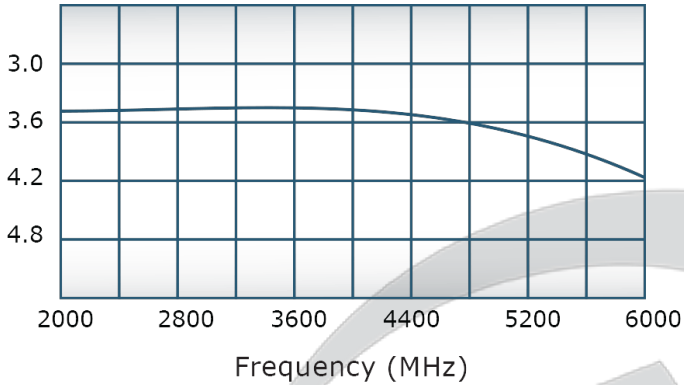


VSWR:

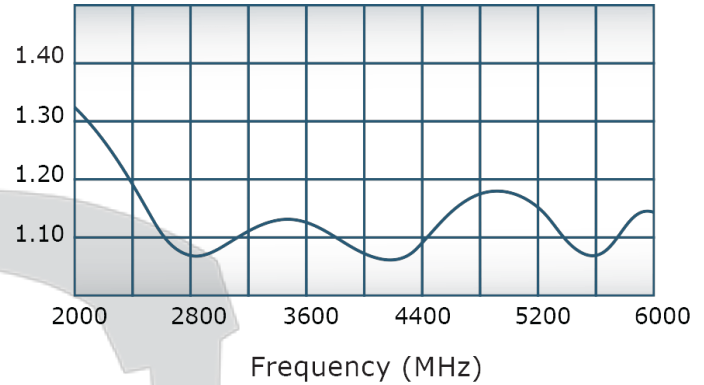

Isolation:

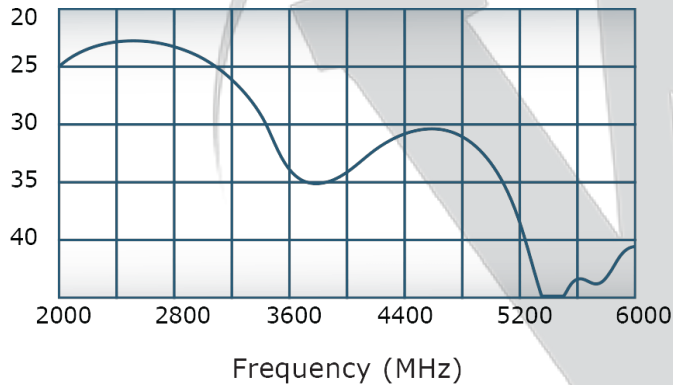


Phase Balance:

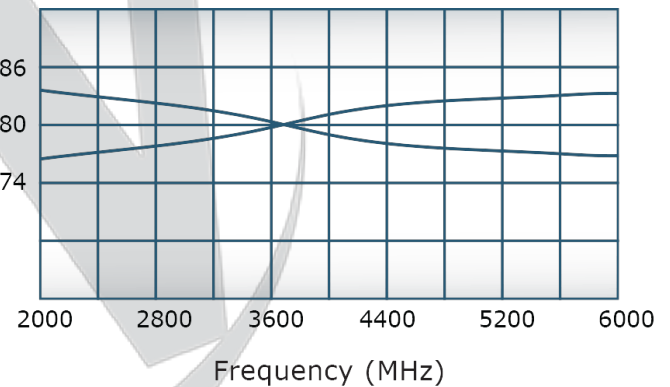



Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.




REVISION HISTORY			
REV	REVISION RECORD	DATE	APPROVED
-	Initial Rls	10/22/2014	BW
A	ECN 9029	2/9/2016	BW

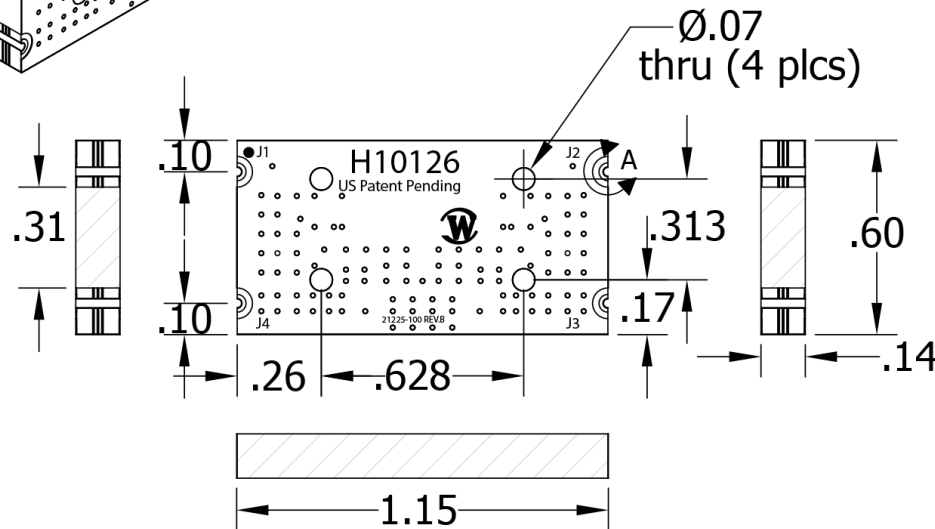

21225-100	H10126
NEXT ASSY	USED ON
APPLICATION	

- UNLESS OTHERWISE SPECIFIED
- INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100
 - DIMENSIONING PER ASME Y14.5M-2009
 - PARENTHESES FOR REF ONLY
 - DIMENSIONS ARE IN INCHES
 - DIMENSIONAL LIMITS APPLY BEFORE PROCESSES
 - TOLERANCES: ANGLES ± 2°
3 PL ± .005
2 PL ± .015

THIRD ANGLE PROJECTION

DWN	DATE	 WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563			
NH	10/22/14						
CHK	DATE						
BW	10/22/14						
ENGR	DATE						
NH	10/22/14						
MFGR	DATE						
QA	DATE	SIZE	CAGE CODE	DWG NO	REV		
RLSE	DATE	A	28812	21225-500	A		
		SCALE			SHEET 1 OF 1		
		2:1					

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com