



| 4 Bort Dual | Directional Coupler and | plays two 2 Port Uni | Directional County | ers, internally connected, in |
|---|---|---|-------------------------------|--------------------------------------|
| tandem. | | ploys two, 5-rolt off | | ers, internally connected, in |
| / | asurement of both forward | d and reverse power. | . Ideal for simultan | eously monitoring a system's |
| forward | | | | , , , |
| | | | | onal Coupler, the directivity of the |
| Dual Directior | al Coupler is unaffected b | by the loads on the c | oupled ports. | |
| Features: | | | | |
| High Power | Wide Bandwidths | Small Size FI | lat Coupling | Custom Designs Available |
| Electrical Sp | ecifications: | | | |
| Frequency: | 0.01 - 1000 MHz | | | |
| Power: | 50 W CW | | | |
| Coupling: | $30 \pm 1.0 \text{ dB Max.}$ | | | |
| nsertion Loss | | | | |
| -latness: | ± 0.5 dB Max. | | | |
| VSWR (ML): | 1.30:1 Max. | | | |
| Directivity: | 20 dB Min. | | | |
| Mechanical S | Specifications: | | | |
| уре: | Connecto | rized | | |
| Jaterial: | | n 6061-T6 | | |
| Suface Finish: | | m Per MIL-DTL-5541 | F | |
| | | ass 3 (Yellow Iridite) | | |
| | | mpliant Available | | |
| Operating Ter | | | | // |
| Storage Temp | | | | |
| Humidity: | | -Condensing | | |
| Size: | 5.2 x 2.28 | | | |
| - | onfigurations | | | |
| | onngulations. | | | |
| Connector C | - | Output (12) | Fwd (I3) | Rev (14) |
| Connector C Model | Input (J1) | Output (J2) N Female | Fwd (J3) N Female | Rev (J4) N Female |
| Connector C Model C5964-10 | Input (J1) N Female | N Female | N Female | N Female |
| Connector C Model C5964-10 C5964-12 | Input (J1) N Female N Female | N Female N Female | N Female SMA | N Female SMA |
| Connector C Model C5964-10 C5964-12 C5964-13 | Input (J1) N Female N Female N Female | N Female N Female N Female | N Female SMA BNC | N Female SMA BNC |
| Connector C Model C5964-10 C5964-12 C5964-13 C5964-102 | Input (J1) N Female N Female N Female SMA | N Female N Female N Female SMA | N Female SMA BNC SMA | N Female SMA BNC SMA |
| Connector C Model C5964-10 C5964-12 C5964-13 | Input (J1) N Female N Female N Female | N Female N Female N Female | N Female SMA BNC | N Female SMA BNC |

Werlatone[®] Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant[®], will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



PRODUCT DATA SHEET




C5964

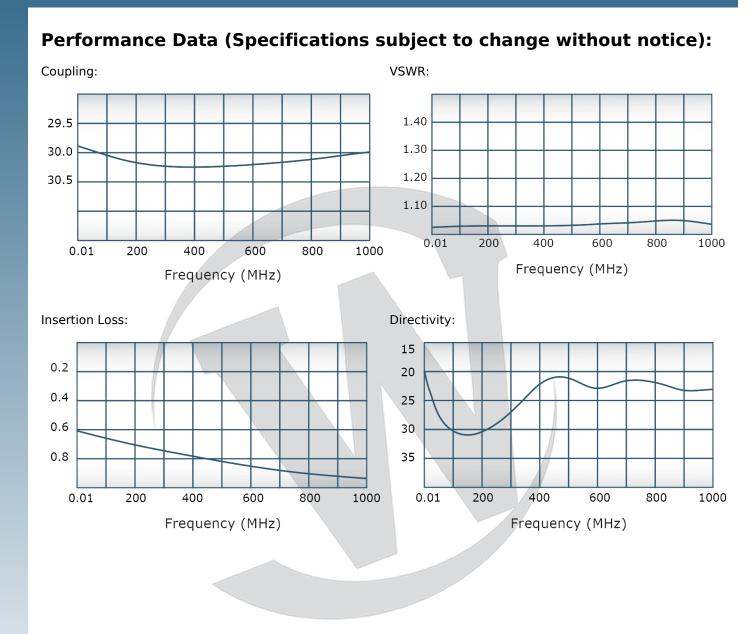

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

C5964 Rev.-

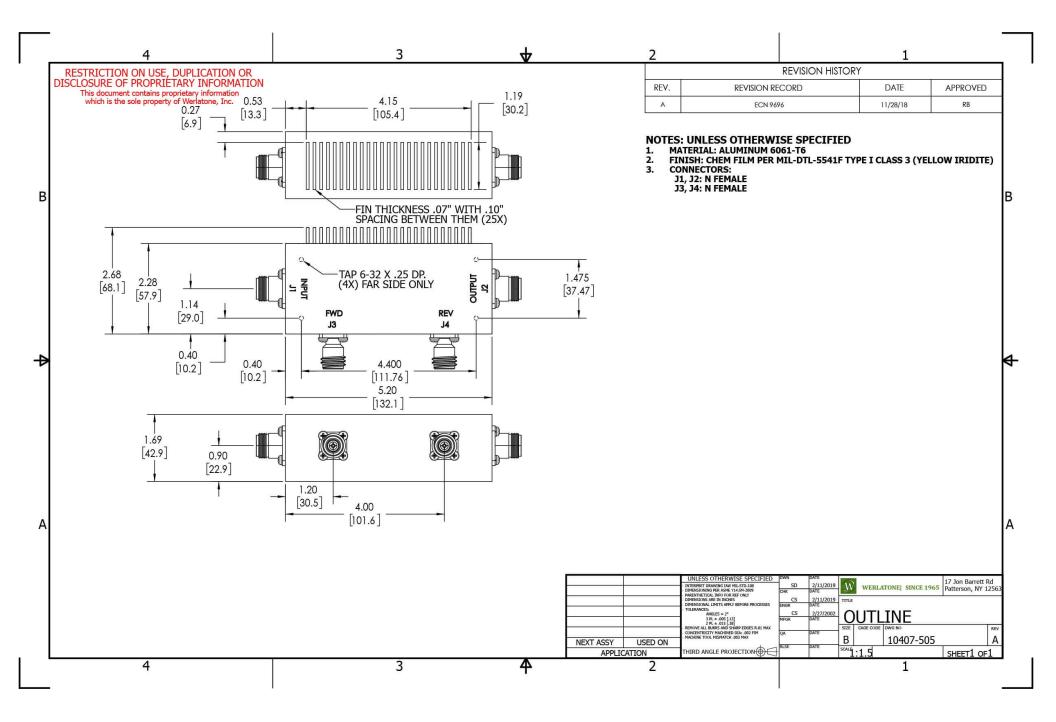

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com