

PRODUCT DATA SHEET

C10117

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 700 - 6000 MHz
Power: 250 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.30:1 Max.
VSWR (CP): 2.0:1 Max.
Directivity: 15 dB Min. (20 dB Typical)


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type II Class 3 (Clear Iridite)
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10117-10	N Female	N Female	N Female	N Female
C10117-12	N Female	N Female	SMA	SMA
C10117-14	N Female	N Female	BNC	BNC
C10117-610	N Female	N Male	N Female	N Female
C10117-612	N Female	N Male	SMA	SMA
C10117-714	N Male	N Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

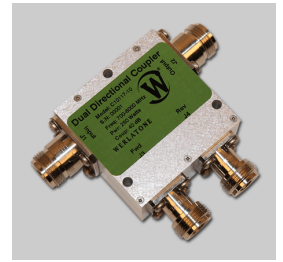


PRODUCT DATA SHEET


C10117

Performance Data (Specifications subject to change without notice):


Coupling:

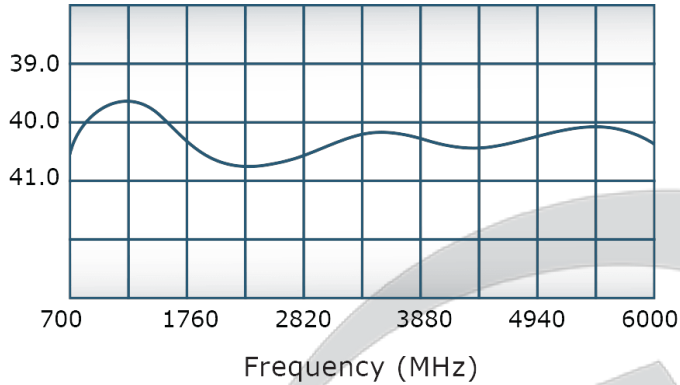


VSWR:

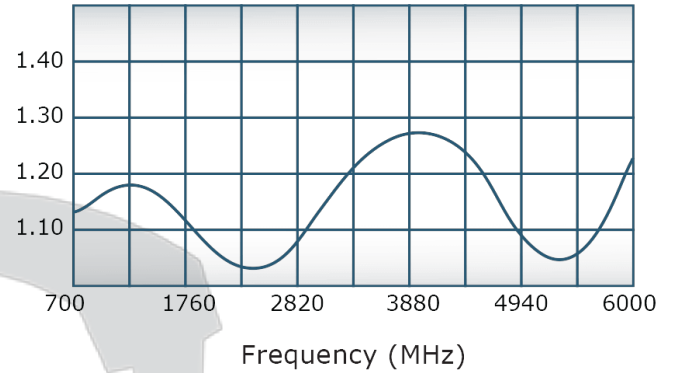



Insertion Loss:

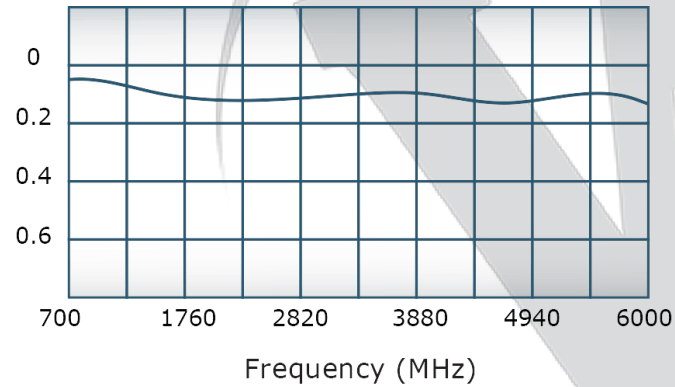

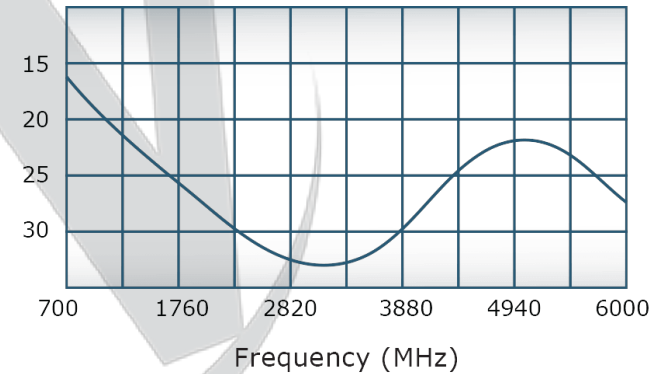

Directivity:

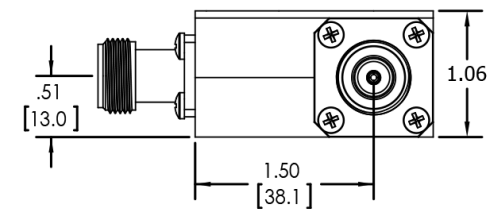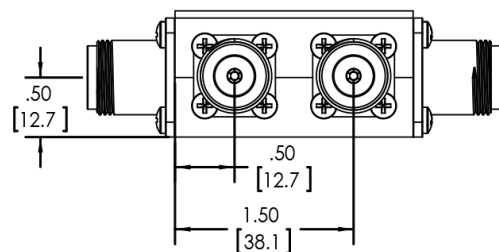

This document contains proprietary information
which is the sole property of Werlatone, Inc.



REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
	PRE-RELEASE		

UNLESS OTHERWISE SPECIFIED		OWN	DATE	 VERLATON® SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563	
INTERPRET DRAWING IN ACCORDANCE WITH THE FOLLOWING DIMENSIONS ARE IN INCHES (MM)		SC	9/30/2014			
DIMENSIONING FOR ASME Y14.5-2009		CRK	DATE			
DIMENSIONAL DATA FOR BEST FIT		CS	9/30/2014			
DIMENSIONAL LIMITS APPLY BEFORE PROCESSES TOLERANCES:		ENGR	DATE	TITLE		
ANGLES $\geq 2^\circ$		BW	9/30/2014	OUTLINE		
2 PL. $\pm .002$ [13]		INFOR	DATE		SIZE	8
2 PL. $\pm .005$ [4]		QA	DATE		CDG NO	21250-500
REMOVE ALL BURRS AND SHARP EDGES R0.1 MAX		RELEASE	DATE		SCALE	1:1
C10117					REV	-
NEXT ASSY USED ON					SHEET 1 OF 1	
APPLICATION		THIRD ANGLE PROJECTION 				

Verlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com