

PRODUCT DATA SHEET

C7288

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 297 - 303 MHz
Power: 400 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.15 dB Max.
Flatness: ± 0.3 dB Max.
VSWR (ML): 1.15:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.0 x 3.0 x 1.09"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7288-10	N Female	N Female	N Female	N Female
C7288-12	N Female	N Female	SMA	SMA
C7288-13	N Female	N Female	BNC	BNC
C7288-302	TNC Female	TNC Female	SMA	SMA
C7288-712	N Male	N Female	SMA	SMA
C7288-714	N Male	N Female	N Female	N Female


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C7288

Connectorized Directional Couplers

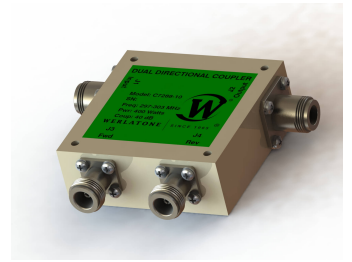


PRODUCT DATA SHEET


C7288

Performance Data (Specifications subject to change without notice):


Coupling:

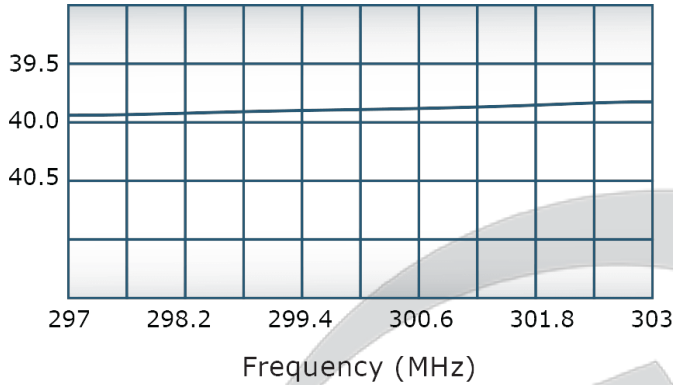


VSWR:

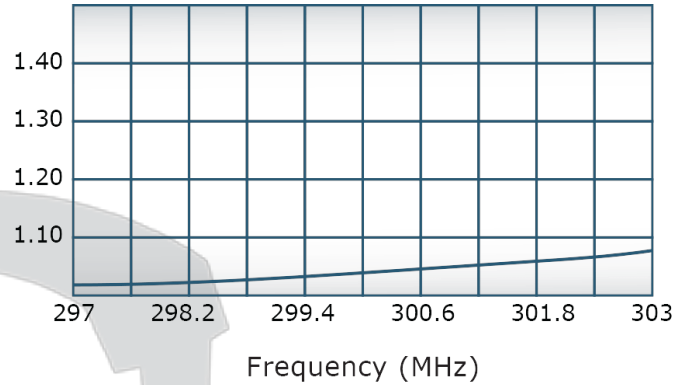

Insertion Loss:

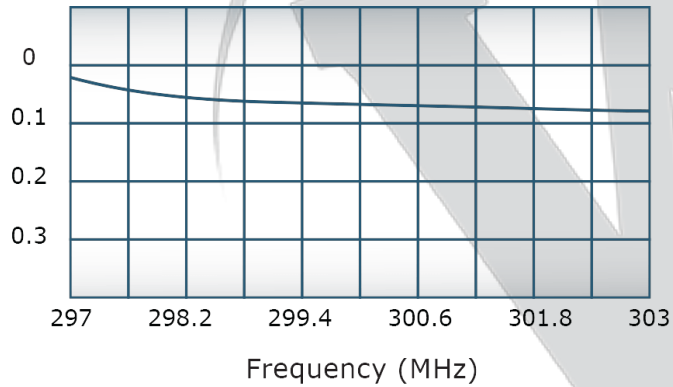

Directivity:

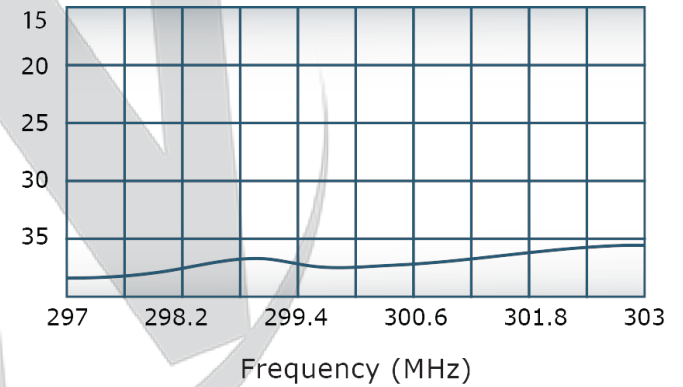

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.





REVISION HISTORY

REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	11/27/18	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL_5541F TYPE I CLASS 3 (YELLOW IRIDITE)**

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563						
		<ul style="list-style-type: none">• INTERPRET DRAWING IN ACC. WITH MIL-STD-100• DIMENSIONS PER ASME Y14.5M-2009• PARENTHESES, INCH FOR INCH ONLY• DIMENSIONS ARE IN INCHES• DIMENSIONAL LIMITS APPLY BEFORE PROCESSES• TOLERANCES:<ul style="list-style-type: none">ANGLES ± 2°3 PL. ± .005 [1.3]2 PL. ± .015 [3.8]• REMOVE ALL BURRS AND SHARP EDGES R.01 MAX• CONCENTRICITY MACHINED DIA: .002 FIM• MACHINE TOOL MISMATCH: .003 MAX	RH	7/5/2001									
NEXT ASSY	USED ON			CHK	DATE	TITLE	SIZE	CAGE CODE	DWG NO	REV			
				ENGR	DATE								
APPLICATION	THIRD ANGLE PROJECTION 			MJ	7/5/2001	OUTLINE	B		10379-505	A			
				QA	DATE								
				RLSE	DATE						SCALE	1:1	SHEET 1 OF 1

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com