



PRODUCT DATA SHEET

C9107

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 20 - 1000 MHz
Power: 1000 W CW
Coupling: 53 ± 1.0 dB Max.
Insertion Loss: 0.4 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 20 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 4.45 x 2.4 x 1.59"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C9107-10	N Female	N Female	N Female	N Female
C9107-12	N Female	N Female	SMA	SMA
C9107-20	7/16 Female	7/16 Female	N Female	N Female
C9107-22	7/16 Female	7/16 Female	SMA	SMA
C9107-23	7/16 Female	7/16 Female	BNC	BNC
C9107-41	SC Female	SC Female	N Female	N Female
C9107-43	SC Female	SC Female	SMA	SMA
C9107-712	N Male	N Female	SMA	SMA
C9107-714	N Male	N Female	N Female	N Female
C9107-7755	7/16 Female	SC Female	SMA	SMA

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com




PRODUCT DATA SHEET


C9107

Performance Data (Specifications subject to change without notice):


Coupling:

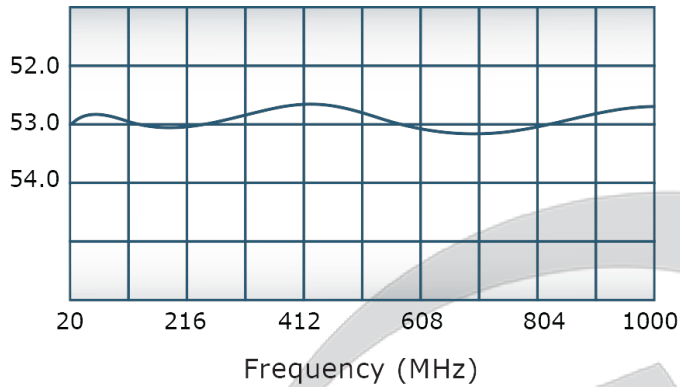


VSWR:

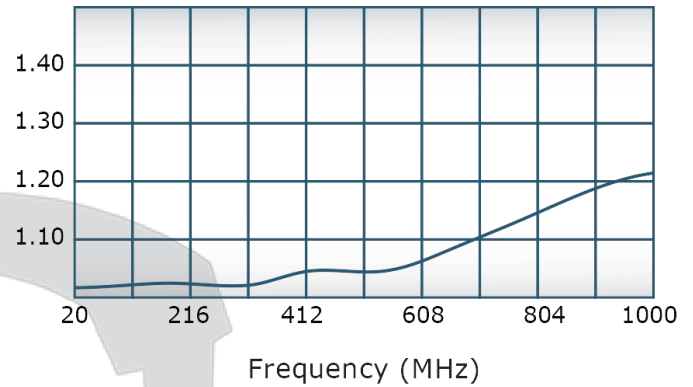

Insertion Loss:

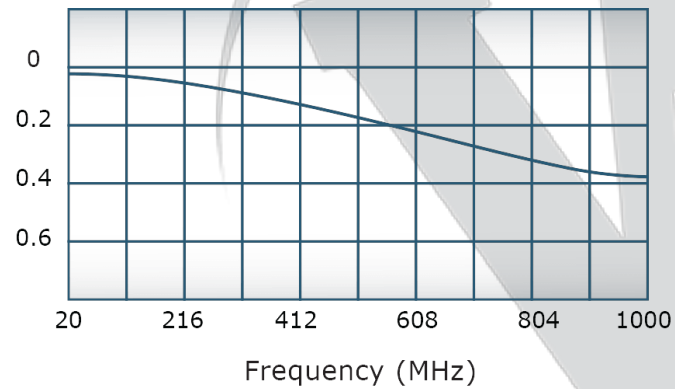

Directivity:

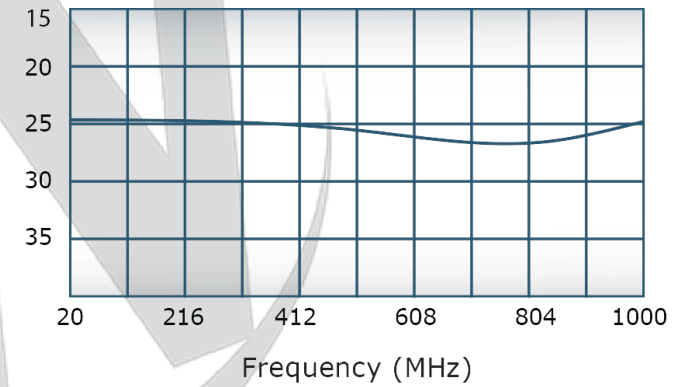

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com


RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 9696	3/25/19	RB

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1,J2: 7/16 FEMALE
J3,J4: SMA FEMALE

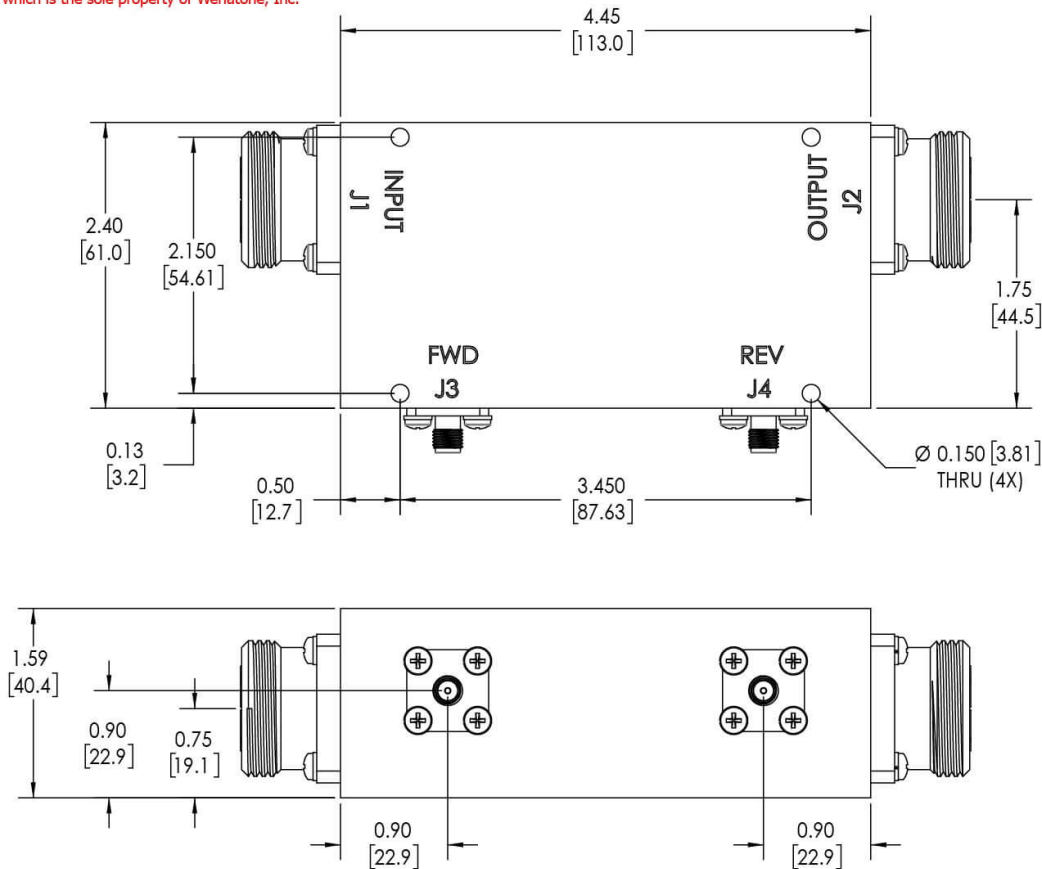

UNLESS OTHERWISE SPECIFIED		DWN	DATE	 WERLATONE [®] SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563	
INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	3/25/2019		TITLE	<div>OUTLINE</div>
DIMENSIONS PER ASME Y14.5-2009		CHK	DATE			
DIMENSIONAL INFO FOR REF ONLY		CS	3/25/2019			
DIMENSIONAL LIMITS APPLY BEFORE FINISHES		ENGR	DATE			
TOLERANCES:		INFR	DATE	<div>SIZE CAGE CODE DWG NO</div> <div>B 20828-500</div>		
ANGLES ± 2°		QA	DATE			REV A
3 PL ± .005 [13]		RLSE	DATE			
2 PL ± .015 [38]						
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX						
CONCENTRICITY MACHINED DIA. .002 FIM				SCALE 1:1		
MACHINE TOOL MISMATCH .003 MAX				SHEET 1 OF 1		
THIRD ANGLE PROJECTION						
NEXT ASSY	USED ON					
APPLICATION						

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com