

PRODUCT DATA SHEET C7150

**4-Port Bi-Directional Coupler**: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled

line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

#### Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

#### **Electrical Specifications:**

 $\begin{array}{lll} \mbox{Frequency:} & 200 - 2000 \mbox{ MHz} \\ \mbox{Power:} & 200 \mbox{ W CW} \\ \mbox{Coupling:} & 6 \pm 1.0 \mbox{ dB Max.} \\ \mbox{Insertion Loss:} & 0.25 \mbox{ dB Max.} \\ \mbox{Flatness:} & \pm 1.0 \mbox{ dB Max.} \\ \mbox{VSWR (ML):} & 1.20:1 \mbox{ Max.} \\ \mbox{Directivity:} & 20 \mbox{ dB Min.} \end{array}$ 

## **Mechanical Specifications:**

Type: Connectorized Material: Aluminum 6061-T6

Suface Finish: Chem. Film Per MIL-DTL-5541F

Type I Class 3 (Yellow Iridite) RoHS Compliant Available

Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 6.0 x 2.0 x 0.85"

Weight: 1.0 lbs.

## **Port Configurations:**

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7150-10	N Female	N Female	N Female	N Female
C7150-12	N Female	N Female	SMA	SMA
C7150-102	SMA	SMA	SMA	SMA

**Werlatone**® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.





PRODUCT DATA SHEET C7150

# Performance Data (Specifications subject to change without notice):

Coupling: VSWR:


5.0
6.0
7.0
1.40
1.30
1.20
1.10
200
560
920
1280
1640
2000

Frequency (MHz)


1.40 1.30 1.20 1.10 200 560 920 1280 1640 2000

Frequency (MHz)


#### Insertion Loss:

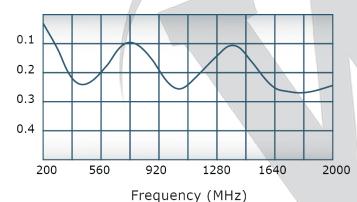

## Directivity:

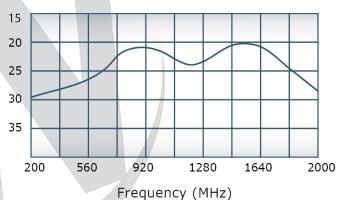

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

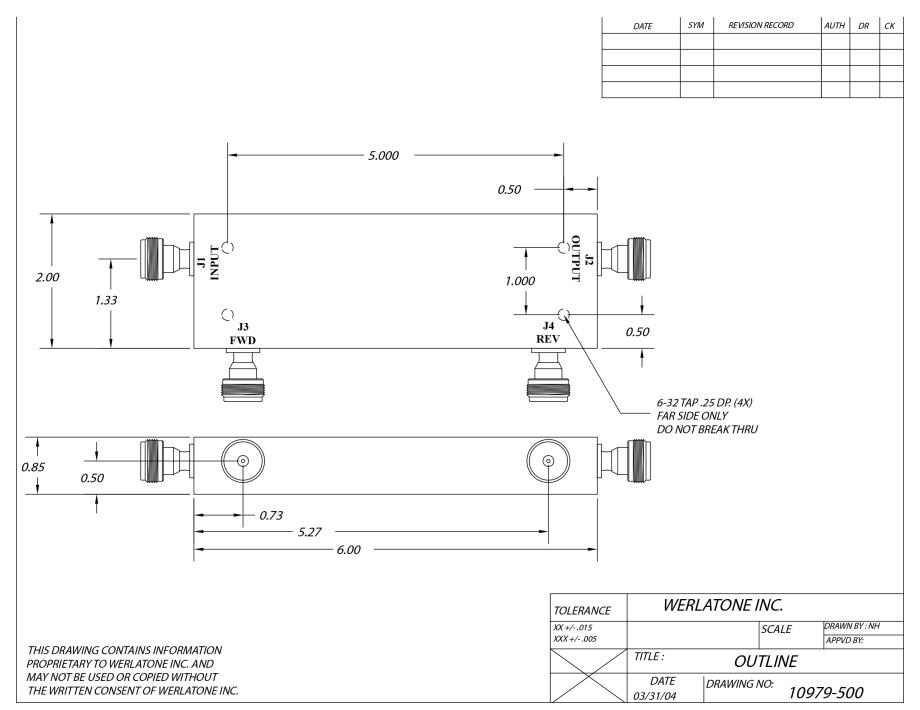

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com