

PRODUCT DATA SHEET C3093

3-Port Uni-Directional Coupler: Consists of a main line and a coupled line. One end of the coupled line is internally terminated, while the other end serves as a coupled port. Ideal for sampling and monitoring power in one direction at a given time. It is necessary to physically reverse the orientation of the unit to change from a forward to a reverse power measurement.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

 $\begin{array}{lll} \mbox{Frequency:} & 2 - 50 \mbox{ MHz} \\ \mbox{Power:} & 200 \mbox{ W CW} \\ \mbox{Coupling:} & 6 \pm 1.0 \mbox{ dB Max.} \\ \mbox{Insertion Loss:} & 0.2 \mbox{ dB Max.} \\ \mbox{Flatness:} & \pm 0.25 \mbox{ dB Max.} \\ \mbox{VSWR (ML):} & 1.15:1 \mbox{ Max.} \\ \mbox{Directivity:} & 20 \mbox{ dB Min.} \end{array}$

Mechanical Specifications:

Type: Connectorized Material: Aluminum 6061-T6

Surface Finish: Chem. Film Per MIL-DTL-5541F

Type I Class 3 (Yellow Iridite) RoHS Compliant Available

Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing

Size: 3 x 3 x 1.95"

Weight: 1 lb.

Port Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)
C3093-10	N Female	N Female	N Female
C3093-12	N Female	N Female	SMA
C3093-13	N Female	N Female	BNC
C3093-102	SMA	SMA	SMA
C3093-300	TNC	TNC	TNC

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com






PRODUCT DATA SHEET C3093

Performance Data (Specifications subject to change without notice):

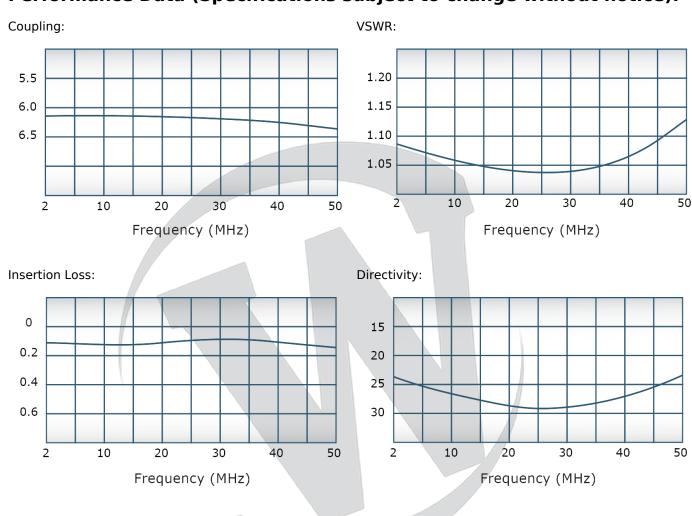

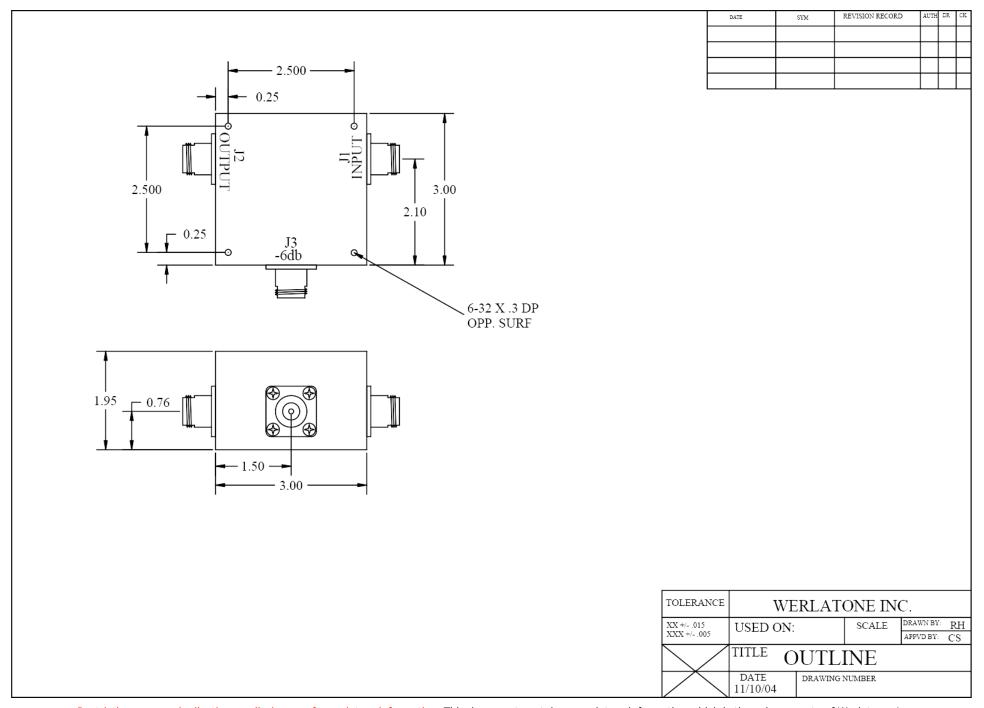

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com