

PRODUCT DATA SHEET

C7925

4-Port Bi-Directional Coupler: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 500 - 2000 MHz
Power: 200 W CW
Coupling: 10 ± 1.0 dB Max.
Insertion Loss: 0.35 dB Max.
Flatness: ± 1.2 dB Max.
VSWR (ML): 1.25:1 Max.
Directivity: 18 dB Min.

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 3.7 x 2.0 x 0.75"
Weight: 8 ounces

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C7925-10	N Female	N Female	N Female	N Female
C7925-12	N Female	N Female	SMA	SMA
C7925-102	SMA	SMA	SMA	SMA


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C7925

Connectorized Directional Couplers




PRODUCT DATA SHEET


C7925

Performance Data (Specifications subject to change without notice):


Coupling:

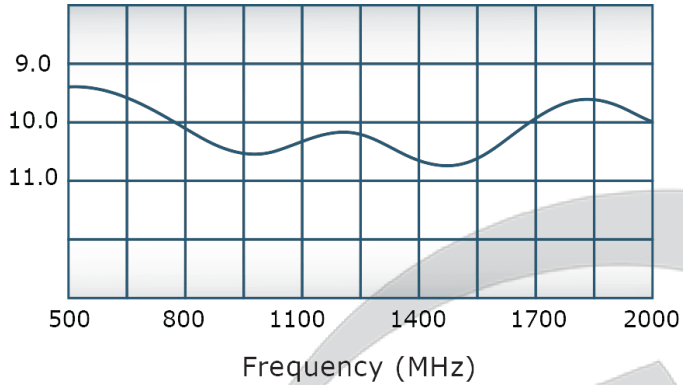


VSWR:

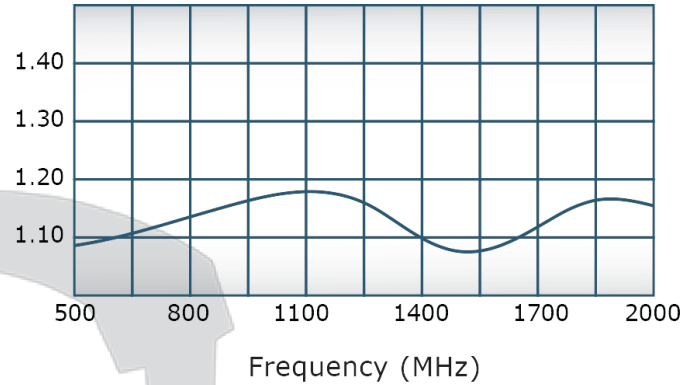

Insertion Loss:

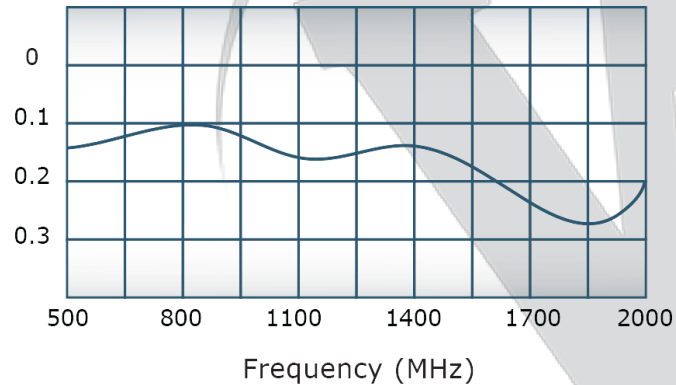

Directivity:

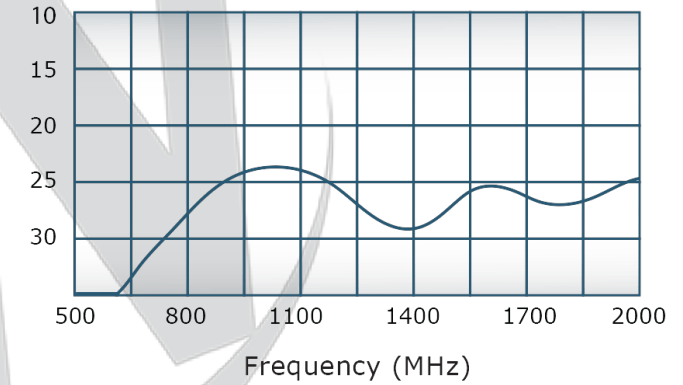


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

RESTRICTION ON USE, DUPLICATION OR
DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information
which is the sole property of Werlatone, Inc.

REVISION HISTORY					
DATE	REV	REVISION RECORD	AUTH	CHK	APPV

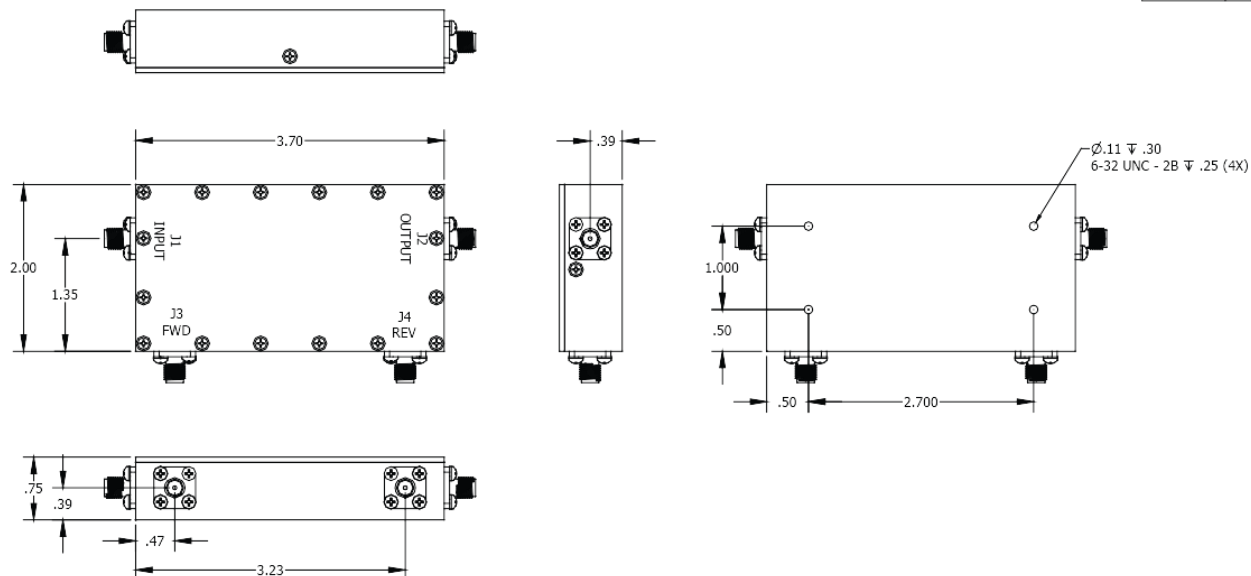

UNLESS OTHERWISE SPECIFIED		OWN	DATE		WERLATONE SINCE 1965		2095 Route 22 Brewster, NY 10509				
* INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		NH	4/1/2010		TITLE						
* DIMENSIONING PER ASME Y14.5M-2009		CHK	DATE	OUTLINE		USED ON					
* PARENTHESES FOR REF ONLY		BW	4/1/2010								
* DIMENSIONS ARE IN INCHES		ENGR	DATE								
* DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		BW	4/1/2010								
* TOLERANCES: ANGLES		QA	DATE	SIZE		CAGE CODE		DWG NO		REV	
XXX ± .2°				A		28812		20611-500			
XX ± .005											
.XX ± .015											
THIRD ANGLE PROJECTION		PLSE	DATE	SCALE						SHEET 1 OF 1	
											

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com