



PRODUCT DATA SHEET

C8060

4-Port Bi-Directional Coupler: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 200 - 6000 MHz
Power: 200 W CW
Coupling: 20 ± 1.0 dB Max.
Insertion Loss: 0.55 dB Max. (200-2000 MHz), 1.1 dB Max. (2000-6000 MHz)
Flatness: ± 1.75 dB Max. (200-2000 MHz), ± 2.25 dB Max. (2000-6000 MHz)
VSWR (ML): 1.25:1 Max. (200-2000 MHz), 1.40:1 Max. (2000-6000 MHz)
Directivity: 18 dB Min. (200-2000 MHz), 14 dB Min. (2000-6000 MHz)

Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 4.8 x 0.88 x 0.5"
Weight: 3.5 oz. / 99 grams

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C8060-102	SMA	SMA	SMA	SMA


Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.



WERLATONE

Model C8060

Connectorized Directional Couplers




PRODUCT DATA SHEET


C8060

Performance Data (Specifications subject to change without notice):


Coupling:

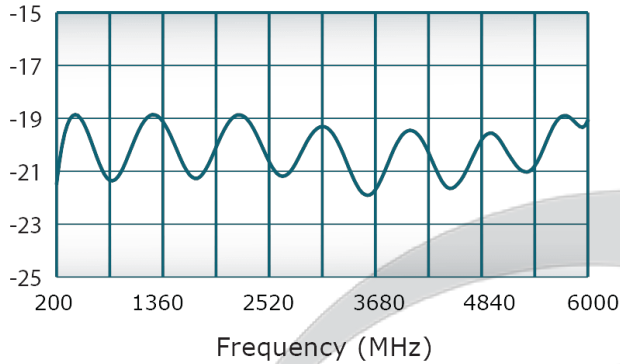


VSWR:

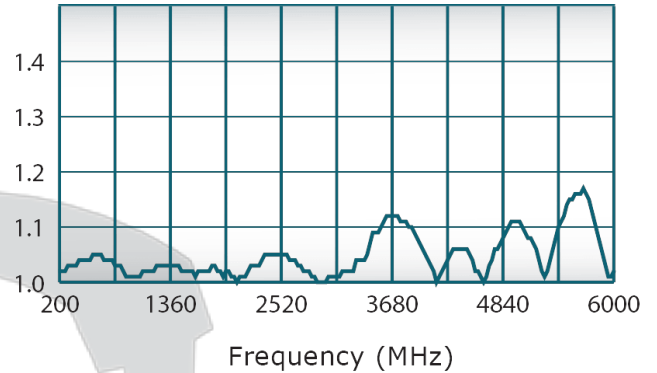

Insertion Loss:

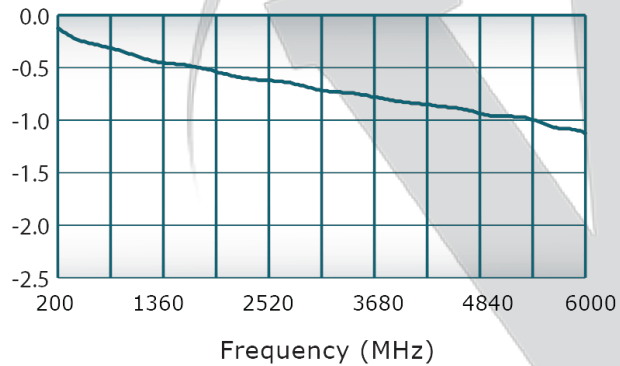

Directivity:

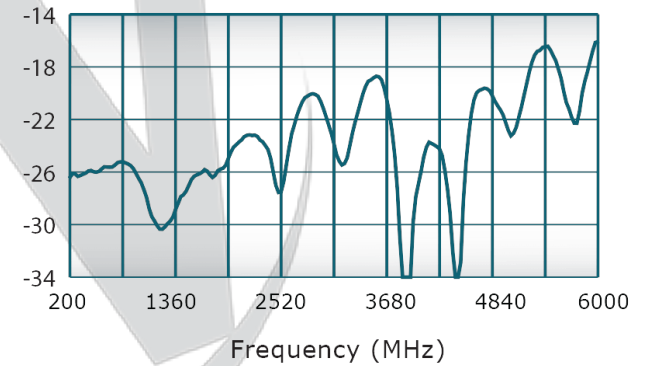


Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com



RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.

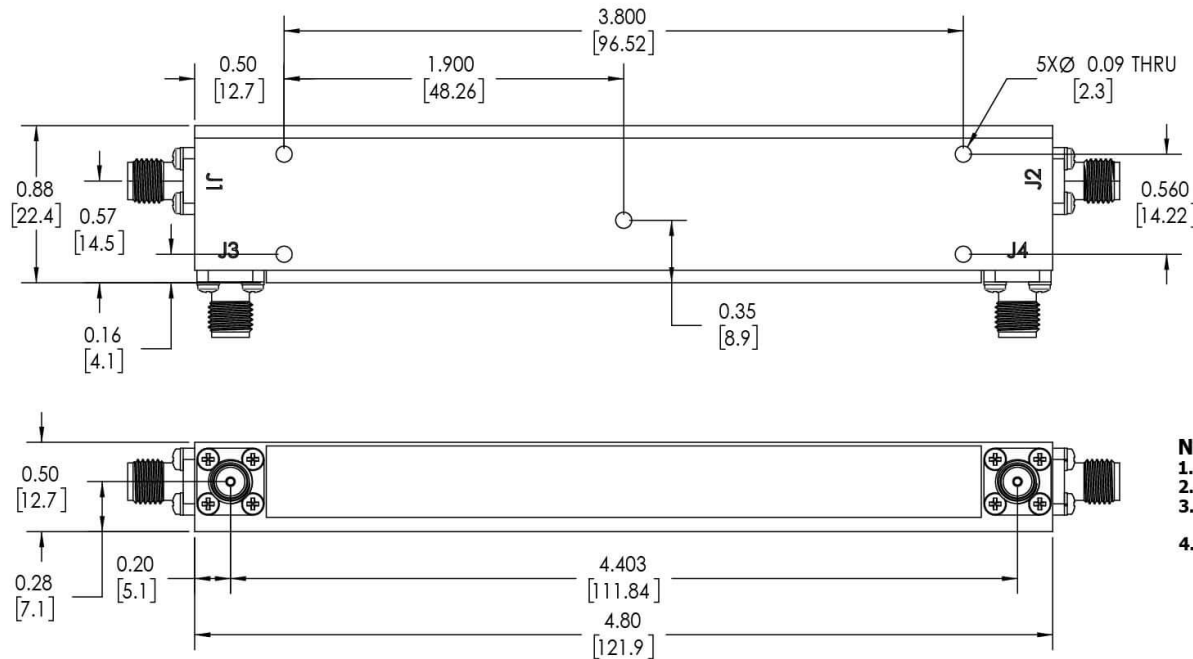REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
A	ECN 4750	3/24/09	BW
B	ECN 9696	3/25/19	RB



NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL: ALUMINUM 6061-T6**
- FINISH: CHEM FILM PER MIL-DTL-5541F TYPE I CLASS 3 (YELLOW IRIDITE)**
- CONNECTORS:**
J1-J4: SMA FEMALE
- J1 - INPUT**
J2 - OUTPUT
J3 - FWD
J4 - REV

		UNLESS OTHERWISE SPECIFIED		OWN	DATE	 WERLATONE SINCE 1965		17 Jon Barrett Rd Patterson, NY 12563	
		INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-100		SD	3/25/2019	OUTLINE			
		DIMENSIONS FOR ASSEMBLY PER ASME Y14.5M-2009		CHK	DATE				
		PARENTHESES ARE FOR REF ONLY		CS	3/25/2019	TITLE			
		DIMENSIONS ARE IN INCHES		ENGR	DATE	1.5:1		B 20496-500	
		DIMENSIONAL LIMITS APPLY BEFORE PROCESSES		INFR	DATE				
		TOLERANCES:		QA	DATE	SIZE CAGE CODE DWG NO		REV	
		ANGLES ± 2°				B 20496-500		B	
		3 PL ± .005 [13]							
		2 PL ± .015 [38]							
		REMOVE ALL BURRS AND SHARP EDGES R.01 MAX							
		CONCENTRICITY MACHINED DIA. .002 FIM							
		MACHINE TOOL MISMATCH .003 MAX							
NEXT ASSY		USED ON		RLSE	DATE				
APPLICATION		THIRD ANGLE PROJECTION 							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.
Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com