

PRODUCT DATA SHEET C7783

**4-Port Bi-Directional Coupler**: Similar to the 3-Port Uni-Directional Coupler, except that both ends of the coupled

line serve as coupled ports. Convenient for simultaneously monitoring both forward and reverse power. The directivity of this coupler design is, however, dependent upon well matched 50 Ohm loads on the coupled ports.

#### Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

## **Electrical Specifications:**

Frequency: 200 - 1000 MHz Power: 200 W CW

Coupling:  $20 \pm 1.0 \text{ dB Max.}$ Insertion Loss: 0.2 dB Max.Flatness:  $\pm 0.75 \text{ dB Max.}$ VSWR (ML): 1.20:1 Max.Directivity: 20 dB Min.

## **Mechanical Specifications:**

Type: Connectorized Material: Aluminum 6061-T6

Suface Finish: Chem. Film Per MIL-DTL-5541F

Type I Class 3 (Yellow Iridite) RoHS Compliant Available

Operating Temperature:  $-55^{\circ}\text{C}$  to  $+75^{\circ}\text{C}$ Storage Temperature:  $-60^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ Humidity:  $95^{\circ}\text{Mon-Condensing}$ Size:  $3.0 \times 1.5 \times 0.53^{\circ}$ 

## **Connector Configurations:**

 Model
 Input (J1)
 Output (J2)
 Fwd (J3)
 Rev (J4)

 C7783-102
 SMA
 SMA
 SMA
 SMA

**Werlatone**® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.


Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com





PRODUCT DATA SHEET C7783

# Performance Data (Specifications subject to change without notice):

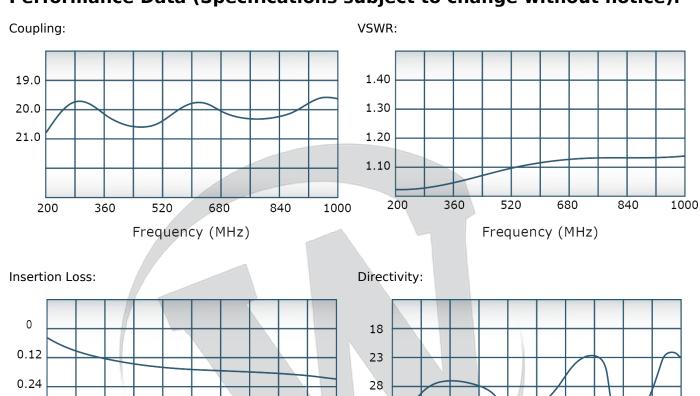

33

1000

200

360

520

680

Frequency (MHz)

840

1000

0.36

200


360

520

680

Frequency (MHz)

840

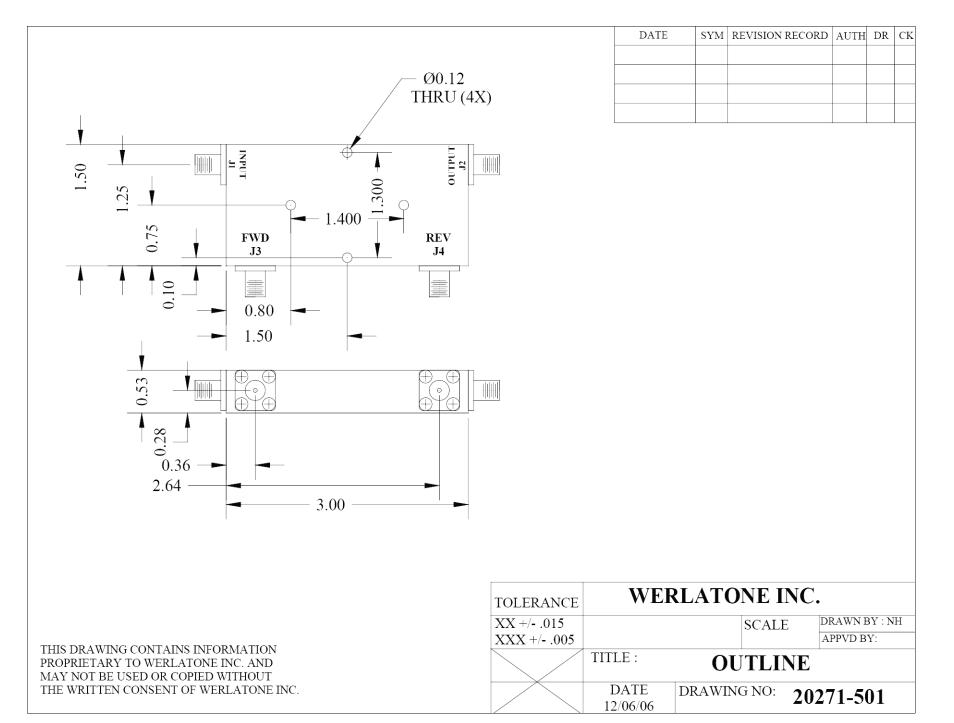

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com