



PRODUCT DATA SHEET

WPM11332

Instantaneous & Simultaneous

- Local and/or Remote Monitoring
- Forward Power Reading/Monitoring (Watts or dBm)
- Reverse Power Reading/Monitoring (Watts or dBm)
- VSWR Readings (Watts, Return Loss, Rho)

VSWR Alarm

- Customer can set up audio/visual alarm via relay contacts.
- Signal sent to closed loop.

Temperature Monitoring (with alarm)

- One sensor, internal measurement, within Power Meter.
- One sensor, external measurement, to be placed by customer.

General Purpose Inputs (6 ea) Multiple Use

- Track switch closures (assign to interlock group).
- Trigger alarm relay (sends email alert).
- RF presence status/alarm (safety feature).
- Alarm, activated switch.

Accessories:

- Single Channel and Multi-Channel Displays
- RF Digital Dashboard Spreadsheet Software, (Simultaneously Monitor Outputs of 30+ Power Meters)
- PC Based Graphical User Interface Windows XP/7/8/10 Compatible

Accuracy:

- $\pm 2\%$ to Customer Calibration Standard, at preselected frequencies.
- $\pm 5\%$ over a Multi-Octave Bandwidth
- Werlatone Calibration Traceable to (NIST) National Institute of Standards and Technology

Power:

- AC Power Adapter (100/240 50-60 Hertz V AC)
- POE (Passive Over Ethernet, Optional POE Injector Kit Available)
- Via RS485 (Via Single Channel or Multi-Channel Displays)

Interface (Via):

- TCP/IP - SNMP and Browser Interface via Local Area Network
- RS232, Serial
- RS485 - Form Addressable Serial Network
- User ID and Password Protected for Access and Control
- Multiple units can be Networked and Simultaneously Monitored On-Site or Remotely (TCP/IP/SNMP/Serial)

RoHS Compliant Design Available
Custom Connector Configurations Available

Electrical Specifications:

Frequency: 10 - 200 MHz
Power: 10,000 W CW

Mechanical Specifications:

Type: Connectorized
Operating Temperature: -55°C to $+75^{\circ}\text{C}$
Storage Temperature: -60°C to $+85^{\circ}\text{C}$


Connector Configurations:

Model	Input(J1)	Output(J2)
WPM11332-83	1 5/8" EIA	1 5/8" EIA



RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION
This document contains proprietary information which is the sole property of Werlatone, Inc.






REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL RELEASE	7/6/2020	CS
A	ECN 9965	9/29/2020	CS

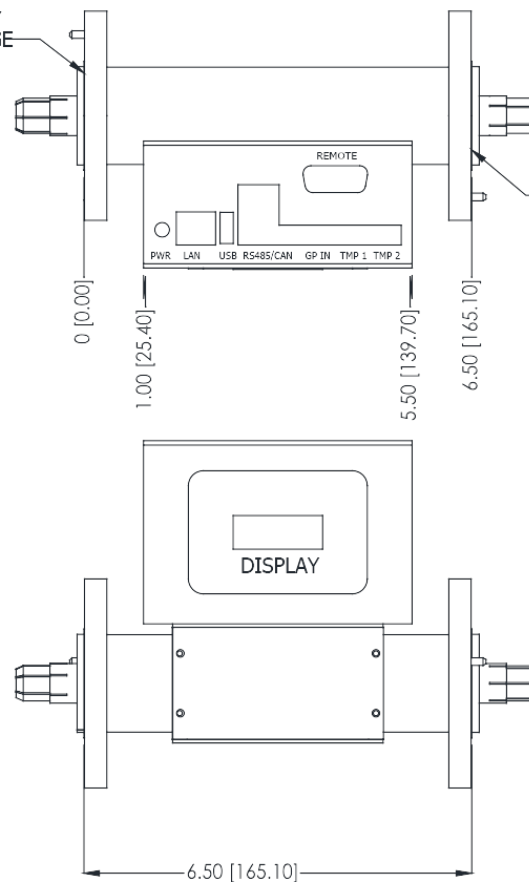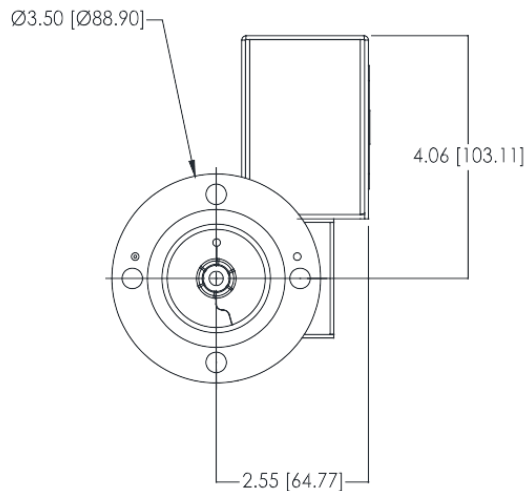

VIEW FOR REFERENCE ONLY



NOTES: UNLESS OTHERWISE SPECIFIED
1. CONNECTORS: J1-J2 1 5/8 (EIA)

		UNLESS OTHERWISE SPECIFIED		PLAN	DATE	 WERLATON SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
		• INTERPRET DRAWING IN ACC. W/ STD-100 • CONSIDER DOWNSIDE PER ASME Y14.36-2009 • PARALLELITY INFO FOR REF ONLY • CONSIDERATIONS ARE IN INCHES [mm] • CONSIDERATIONAL LIMITS APPLY BEFORE PROCESSING • TOLERANCES: ANGLES: 5° 2 PL. & 0.12 [1.1] 2 PL. & 0.12 [1.1]		PLP	7/24/2015		 OUTLINE		
				CHK	DATE				
				CS	7/6/2020				
				ENGR	DATE				
				FIGFR	DATE				
				QA	DATE				
				RLSE	DATE				
WPM11073		• REMOVE ALL BURRS AND SHARP EDGES R.1 MAX • CONDUCTIVITY MAXIMUM 250 FEM • MACHINE FLOOR PROJECTION 0.00 MAX		SCALE B 1:2		CASE CODE DWG NO 21340-505		REV A	
NEXT ASSY		USED ON		SCALE 1:2		SHEET 1 OF 1			
APPLICATION		THIRD FLOOR PROJECTION 							

Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc. Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com