
PRODUCT DATA SHEET
C10526

4-Port Dual Directional Coupler employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

Features:

High Power Wide Bandwidths Small Size Flat Coupling Custom Designs Available

Electrical Specifications:

Frequency: 700 - 6000 MHz
Power: 300 W CW
Coupling: 40 ± 1.0 dB Max.
Insertion Loss: 0.2 dB Max.
Flatness: ± 1.0 dB Max.
VSWR (ML): 1.30:1 Max.
Directivity: 15 dB Min.


Mechanical Specifications:

Type: Connectorized
Material: Aluminum 6061-T6
Surface Finish: Chem. Film Per MIL-DTL-5541F
Type I Class 3 (Yellow Iridite)
RoHS Compliant Available
Operating Temperature: -55°C to +75°C
Storage Temperature: -60°C to +85°C
Humidity: 95% Non-Condensing
Size: 2.0 x 2.0 x 1.06"

Connector Configurations:

Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10526-10	N Female	N Female	N Female	N Female
C10526-12	N Female	N Female	SMA	SMA
C10526-714	N Male	N Female	N Female	N Female

Werlatone® Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




PRODUCT DATA SHEET


C10526

Performance Data (Specifications subject to change without notice):


Coupling:

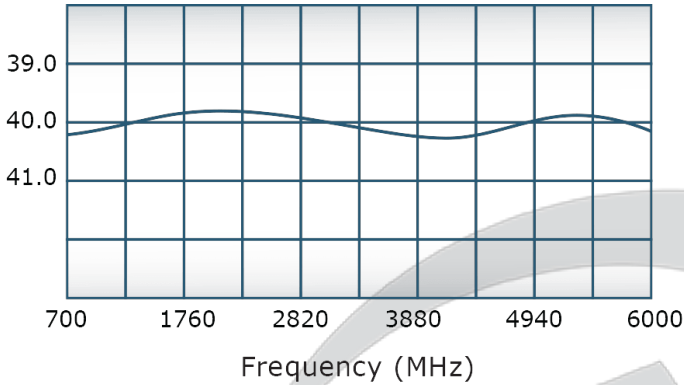


VSWR:

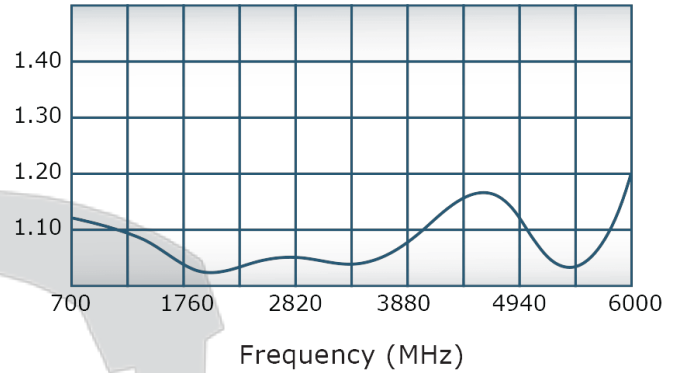

Insertion Loss:

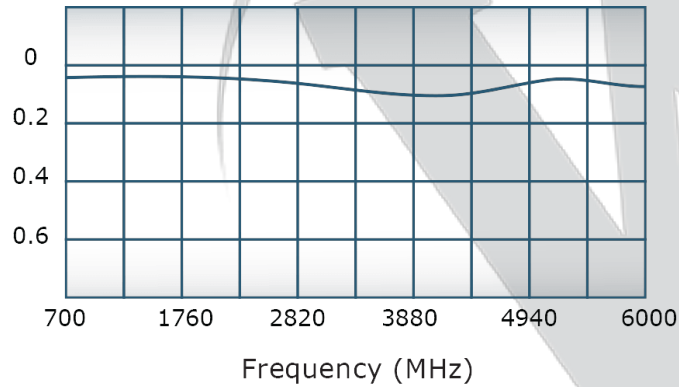


Directivity:

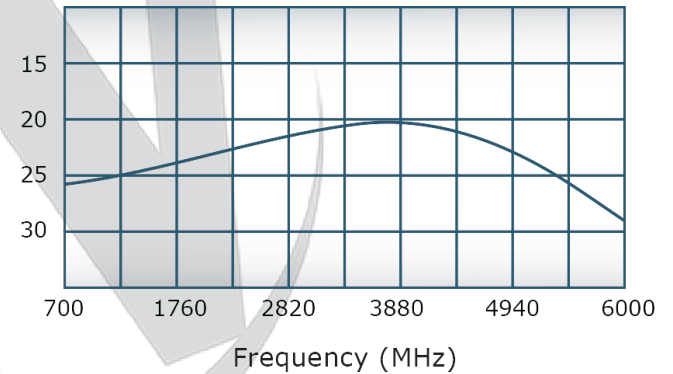




Restriction on use, duplication, or disclosure of proprietary information. This document contains proprietary information which is the sole property of Werlatone, Inc.

Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com

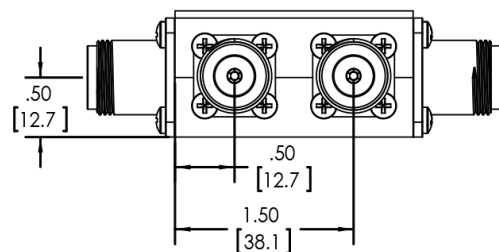This document contains proprietary information
which is the sole property of Werlatone, Inc.



UNLESS OTHERWISE SPECIFIED		DWG	DATE	 WERLATON® SINCE 1965	17 Jon Barrett Rd Patterson, NY 12563		
INTERPRET DRAWING IN ACCORDANCE WITH DIMENSIONS PER ASME Y14.5-2009 DIMENSIONAL INFO FOR REF ONLY DIMENSIONS ARE IN INCHES (mm)		SC	9/30/2014		 WERLATON® SINCE 1965		
DIMENSIONAL LIMITS APPLY BEFORE SPECIFICATIONS TOLERANCES:		CS	9/30/2014			TITLE	
ANGLES ± .5° 3 PL ± .005 [13] 2 PL ± .015 [4]		BW	9/30/2014			OUTLINE	
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX CONCENTRICITY MAXIMUM DIA .002 FIM MACHINE TOOL FINISH .003 MAX		SA	DATE	SIZE		CASE CODE	DWG NO
C10117 USED ON		RELSE	DATE	B 28812	21250-500	REV	
THIRD ANGLE PROJECTION 		1:1					SHEET 1 OF 1

•