



## PRODUCT DATA SHEET

C10761

**4-Port Dual Directional Coupler** employs two, 3-Port Uni-Directional Couplers, internally connected, in tandem, providing measurement of both forward and reverse power. Ideal for simultaneously monitoring a system's forward and reverse power and for reflectometer measurements. Unlike the Bi-Directional Coupler, the directivity of the Dual Directional Coupler is unaffected by the loads on the coupled ports.

### Features:

High Power      Wide Bandwidths      Small Size      Flat Coupling      Custom Designs Available

### Electrical Specifications:

Frequency: 1000 - 6000 MHz  
Power: 600 W CW  
Coupling: 40 ± 1.0 dB Max.  
Insertion Loss: 0.2 dB Max.  
Flatness: ± 0.5 dB Max.  
VSWR (ML): 1.35:1 Max.  
Directivity: 15 dB Min.

### Mechanical Specifications:

Type: Connectorized  
Material: Aluminum 6061-T6  
Surface Finish: Chem. Film Per MIL-DTL-5541F  
Type I Class 3 (Yellow Iridite)  
RoHS Compliant Available  
Operating Temperature: -55°C to +75°C  
Storage Temperature: -60°C to +85°C  
Humidity: 95% Non-Condensing  
Size: 2.15 x 2.0 x 1.36"

### Connector Configurations:


Model	Input (J1)	Output (J2)	Fwd (J3)	Rev (J4)
C10761-20	7/16 Female	7/16 Female	7/16 Female	7/16 Female
C10761-22	7/16 Female	7/16 Female	SMA	SMA
C10067-727	7/16 Male	7/16 Male	7/16 Female	7/16 Female

**Werlatone®** Broadband Dual, Uni, and Bi Directional RF Couplers are designed to tolerate the most stringent operating conditions associated with military and EMC testing environments. Many of our RF Directional Couplers, designated Mismatch Tolerant®, will operate continuously, at rated power, into a severe load mismatch condition. Our multi-octave Directional Couplers maintain exceptional coupling flatness, directivity, VSWR, and insertion loss.




## Performance Data (Specifications subject to change without notice):


Coupling:

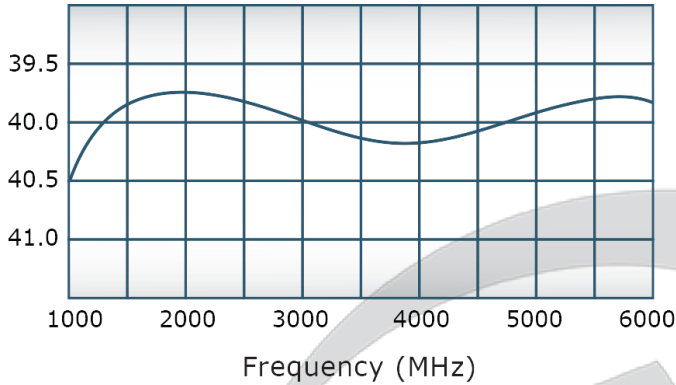


VSWR:

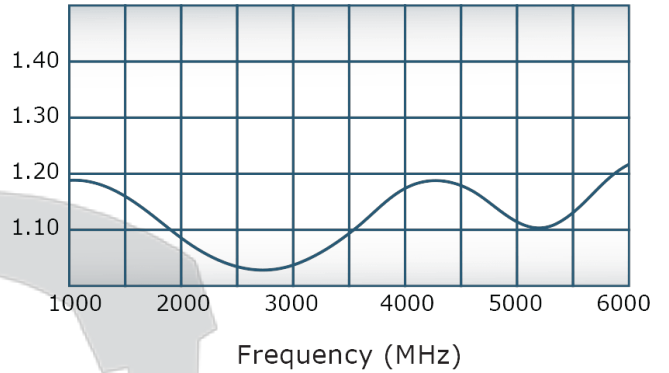

Insertion Loss:


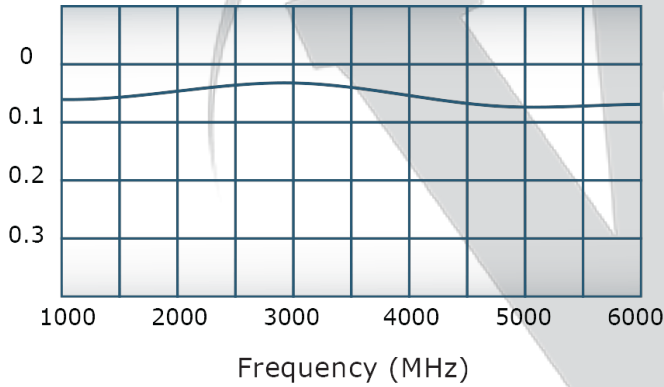


Directivity:

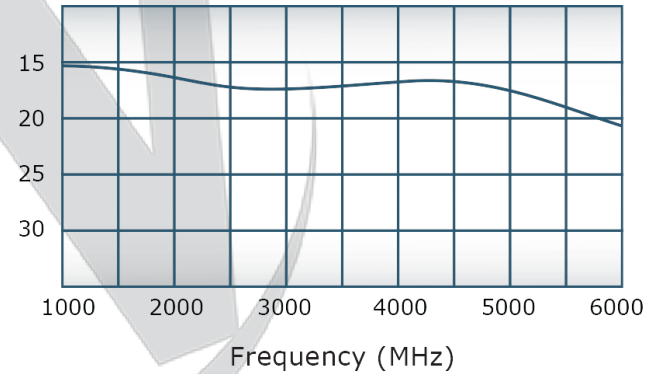

**RESTRICTION ON USE, DUPLICATION OR DISCLOSURE OF PROPRIETARY INFORMATION**  
 This document contains proprietary information which is the sole property of Werlatone, Inc.

REVISION HISTORY			
REV.	REVISION RECORD	DATE	APPROVED
-	INITIAL-RELEASE	5/8/2015	BW

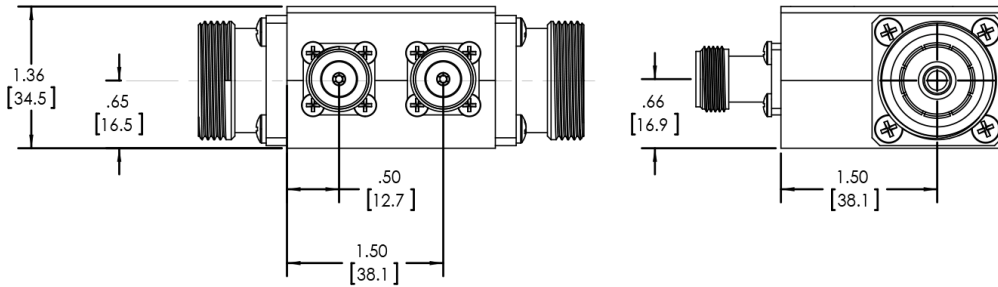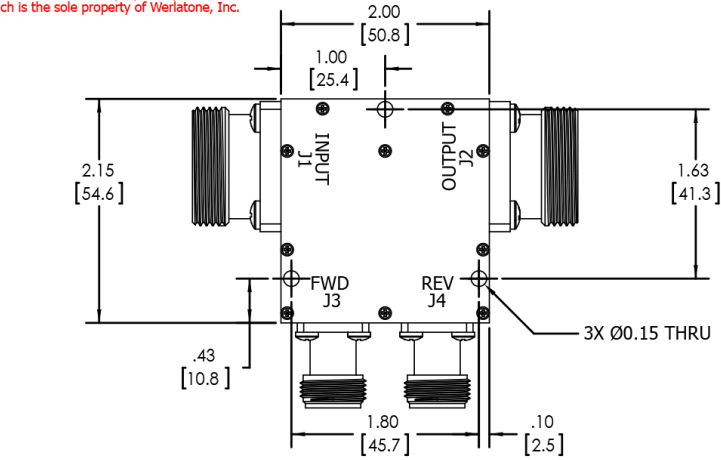

UNLESS OTHERWISE SPECIFIED		DATE	PLP	5/4/2015	<b>WERLATONE SINCE 1965</b> 17 Jon Barrett Rd Patterson, NY 12563
INTERPRET DRAWING PER MIL-STD-100		DATE	CHK	5/8/2015	
DIMENSIONS PER ASME Y14.9M-2009		DATE	CS	5/8/2015	TITLE
PARENTHESES ARE FOR REF ONLY		DATE	DRGR		<b>OUTLINE</b>
DIMENSIONS ARE IN INCHES (mm)		DATE	REGR		SIZE
DIMENSIONAL LIMITS APPLY BEFORE FINISHES		DATE	QA		CAGE CODE
TOLERANCES:		DATE	RELSE		DWG NO
ANGLES ± 2°		DATE			B 28812
3 RL ± .005 [13]		DATE			21316-500
2 RL ± .015 [4]		DATE			REV
REMOVE ALL BURRS AND SHARP EDGES R.01 MAX		DATE			-
CONCENTRICITY MAXIMUM DIA. .002 FPM		DATE			SCALE
MACHINE TOOL MISMATCH .003 MAX		DATE			1:1
NEXT ASSY	USED ON	THIRD ANGLE PROJECTION			SHEET 1 OF 1
APPLICATION					

**Restriction on use, duplication, or disclosure of proprietary information.** This document contains proprietary information which is the sole property of Werlatone, Inc.  
 Werlatone, Inc. 17 Jon Barrett Road Patterson, NY 12563 T:(845)278-2220 F:(845)278-3440 sales@werlatone.com www.werlatone.com